



PULSE PROGRAM CATALOGUE: I. 1D & 2D NMR EXPERIMENTS

Teodor Parella
Servei RMN, Universitat Autònoma de Barcelona
E-mail: teodor.parella@uab.cat



TOPSPIN v2.0
NMRGuide



UAB

Copyright (C) 2006 by Bruker BioSpin GmbH
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system,
or transmitted, in any form, or by any means without the prior consent of the publisher.

03-03-2006
Part Number -----

Product names used are trademarks or registered trademarks of their respective holders.

VOLUME I: 1D & 2D NMR EXPERIMENTS

• Table of Contents.....	1-2
• Introduction.....	3-6
• Standard Pulse Schemes	
1. Basic 1D pulse sequences.....	7
2. T1 & T2 Relaxation.....	13
3. Selective Excitation & Selective 1D Experiments.....	15
4. 1D Solvent suppression.....	21
Presaturation	
Jump and Return	
Watergate	
Excitation Sculpting	
WET	
5. ¹⁹ F specific experiments.....	27
6. ² H specific experiments.....	29
7. Basic 1D Gradients.....	31
• Homonuclear Experiments	
8. 2D COSY.....	33
9. 2D COSY-DQF.....	37
10. 2D SECSY.....	41
11. 2D RELAY.....	43
12. 2D TOCSY	47
13. 2D ROESY	53
14. 2D NOESY	57
15. 1D & 2D Double-Quantum.....	63
16. 2D J-Resolved	67
• Heteronuclear 1D & 2D X-detected experiments	
17. Decoupler Pulse Calibration.....	69
18. 1D DEPT & INEPT.....	73
19. 2D HETCOR.....	81
20. 2D COLOC.....	87
21. 2D Heteronuclear J-resolved.....	89
22. 2D HOESY.....	91
23. 1D & 2D INADEQUATE.....	93
• 2D Inverse Experiments	
24. Basic 1D Inverse.....	97
Direct 2D Correlations	
25. HMQC.....	101
26. DEPT-HMQC.....	111
27. HSQC.....	113
28. Multiplicity-edited HSQC.....	127
29. Constant-time correlations.....	133
CT-HSQC	
CT-HMQC	
30. Inverse-INEPT	137
31. Spin-edited HSQC for ¹ J(XH) determination.....	139
2D HSQC- α,β	
2D IPAP-HSQC	
2D J-modulated CT-HSQC	
32. TROSY	145
33. CRINEPT.....	151
2D HMQC hybrids	
34. HMQC-COSY.....	153
H2BC.....	
35. HMQC-TOCSY.....	157

36. HMQC-ROESY.....	163
37. HMQC-NOESY.....	167
2D HSQC hybrids	
38. HSQC-TOCSY	171
39. HSQC-ROESY	179
40. HSQC-NOESY	183
2D Long-Range Correlations	
41. HMBC	187
42. Measurement of long-range proton-carbon coupling constants	193
Phase-sensitive HMBC	
CT-HMBC	
J-HMBC	
Long-range HSQC (HSQMBC)	
EXSIDE	
HETLOC	
HSQC-HECADE	
43. ADEQUATE	201
1,1-ADEQUATE	
1,n-ADEQUATE	
n,1-ADEQUATE	
n,n-ADEQUATE	
• Miscellaneous Experiments	
44. 1D, 2D & 3D Diffusion/DOSY.....	207
STE	
STEBP	
DSTE	
DSTEBP	
LED	
LEDBP	
DOSY-COSY	
DOSY-TOCSY	
DOSY-NOESY	
45. 1D & 2D Saturation Transfer Difference (STD).....	213
STD-TOCSY	
STD-NOESY	
STD-HSQC	
46. 1D & 2D Experiments using CLEANEX.....	223
CLEANEX-HSQC	
CLEANEX-TROSY	
47. 1D & 2D LC-NMR Experiments.....	227
48. Basic Solid-State NMR Experiments.....	235
• Appendix 1. Pulse Program Info.....	237
• Appendix 2. Pulse Program Parameters	241
• Appendix 3. Relations with edprosol/getprosol	246
<u>VOLUME II: BIOMOLECULAR NMR EXPERIMENTS.....</u>	250

BRUKER Pulse Program Catalogue

written by Teodor Parella

This catalogue presents the pulse sequence diagram for all standard pulse programs included in TOPSPIN v2.0. This information is part of NMRGuide 4.1, also available for BRUKER AVANCE spectrometers.

These pulse programs are located in the

/TOPSPINHOME/pp/stan/nmr/lists/pp

directory after conventional installation using expinstall and they can be visualized directly into the TOPSPIN program from the PulsProg section. Otherwise, alternative pulse program sequence representation is also available using the showpp program.

For more details on pulse programs, parameter sets, tutorials, experiment descriptions, bibliographic references and other related information, please refer to the electronic version of NMRGuide 4.1.



© BRUKER BIOSPIN
1998-2002



Z'''1:
E
Ω'1:1
Ω...00
Ω...
a
1...
O
"C oo
z
N
O

INDEX

NMRGuide



Home | About | Wizards | Encyclopedia | Tutorials | Library | Documentation

Pulse Programs by alphabetical order: A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | Z - all

HNCO

Nomenclature of Parameters
Nomenclature of Pulse Programs
About Last Changes

Pulse Programs Reference Manual

BIUif(I" \$ LIBRARY

Pulse Programs

1D Elements

2D Homonuclear

2D Heteronuclear 2D Inverse and Gradients

Ia

Homonuclear

X-detected

from f2 ch.ann.el

Solvent Suppression

Homonuclear

In-use

from f3 ch.ann.el

Selective Excitation

Homonuclear & Gradients

from f2 clwmel

2D1ROSY

Selective & Gradients

G... ts RO

from f3 clwmel

Relaxation from f3 ckann.el

Selective & Gradients

.nū.cn III-2 Band-Selective Homonuclear

Inverse X-IDtered

X-de d

Inverse

Inverse & Gradients

Miscellaneous

ftJCHMeasurement

3D Experiments

3D Miscellaneous

Miscellaneous

Include Files

Triple-Resonance

Homonuclear

LC-NMR

AWJU:e.ind

Backbone

Double-Resonance

Calibration & Tests

Delay.incl

Backbone-Si4e chain

from f2 ch.ann.el

Solid-State

Daz.btcl

²H-decoupled

from G ch.ann.el

Diffusion

De.btcl

Backbone

3DNOE

ur

Gnd.btcl

Backbone-Side chain

X-filtered/selected

2a

Solids.btcl

1ROSY

Coupling Constants

Nucleic Acids

Syscon.f.incl

Backbone

Coupling Constants

Backbone-Si4e chain

CoJtStan.ts

2H-decoupled

Z'''C
::>;i
CJ'''C
O- (fQ
G ...
*..3
>..3
>-JII;
O ...
'' (fQ
H: dy
O



AVAILCB-f'ffffria/s

NMR Assistance

Step 1: Is the Specrometer Ready?

Installation & Configuration ([cf](#) & [expinstall](#))
[Tests & Calibrations](#) ([edprosol](#))
Defining the probe ([edbead](#))

Step 2: Preliminary Set-up

[About Sample Preparation](#)
Insert the sample ([ij/ej](#))
Select the solvent ([lock](#))
[Tuning & Matching](#) ... ([wobb](#))
[Shirnrlng](#) ... ([rsh](#) ...)

Step 3: Data Acquisition (eda)

Create a new file ([edc](#))
Read Parameter Set ([rpar](#) ...)
Set Pulses ([getprosol](#))
ModifY parameters ([ased](#))
Start Acquisition ([rga](#) & [zg](#))

Step 4: Data Processing (edp)

Transforming the data ([ft](#), [xfb](#) ...)
[Phase correction](#) ([apk](#))
[Baseline correction](#) ([abs](#))
Plot ([edg](#), [xwi.nplot](#))

Step 5: Automation ...


[Using macros](#) ... ([edmac](#))
[Using icomum](#) ... ([Biotool](#))
[buttomum](#) & [butsehunr](#)
[AU Programs](#) ([xau](#))

Step 6: Deciding what to do?

[Which experiments can I do](#) ...
[Starting Parameter Set](#) ...
Routine IDAR experiments
Interpreting the spectra...

ruw

bio
-O-C
'''C
Z'a

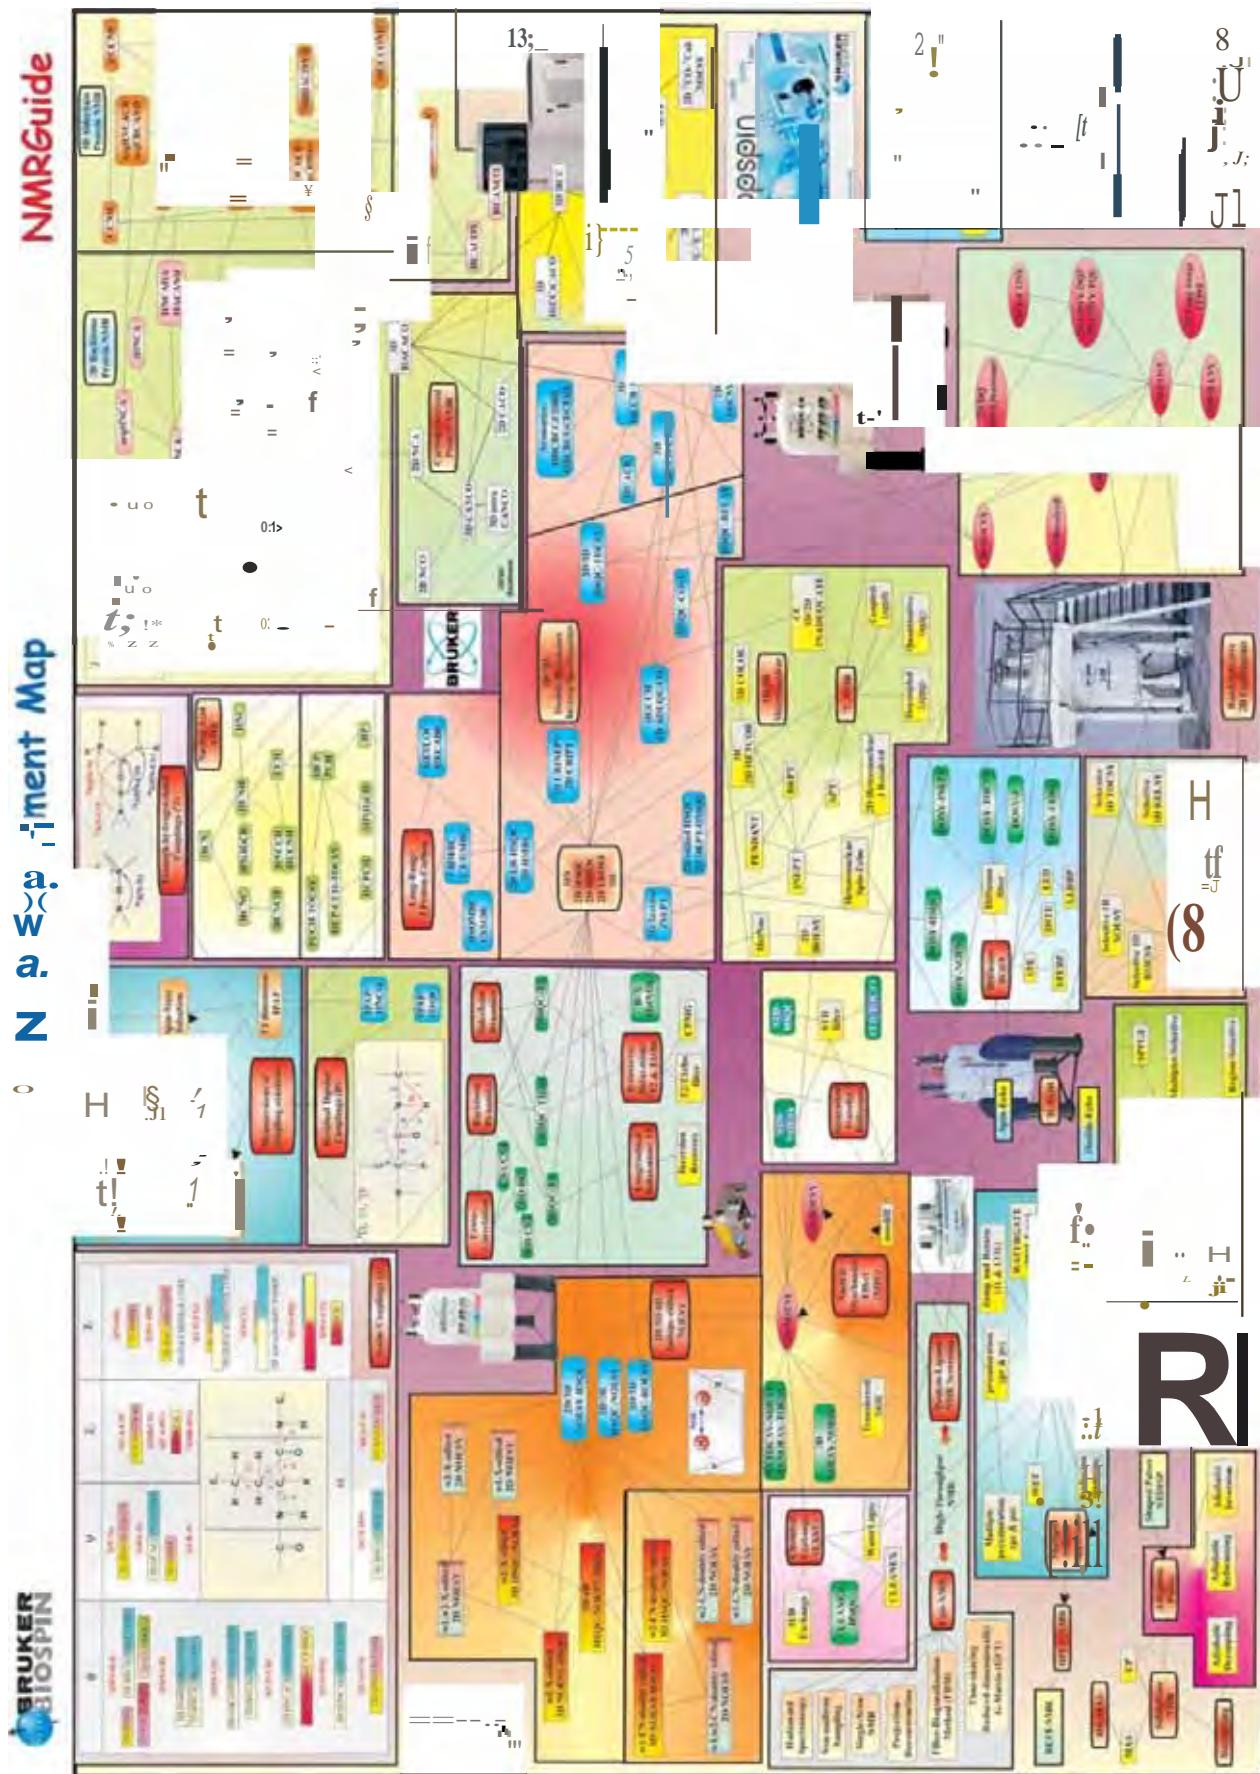

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

BASIC 1D PULSE SEQUENCES

• Standard Experiments:

Conventional ^1H spectrum (zg30 / zg / zg0 | PROTON)
Acquired as 2D (zg2d)

1D ^1H Homodecoupling (zg0hd / zghd / zghd.2 | PROHOMODEC)

1D ^1H Band-selective homodecoupling (zghc / zghc.2)

NOEDIFF experiment:
Single irradiation (zgf2pr)
Using frequency list (noediff / noediff.2 / noedif.2 | NOEDIFF)
Irradiation multiplet frequencies within one multiplet (noemul)

^{13}C spectrum with selective ^1H decoupling using CW (zgcw30 / zgcw / zg0cw)

^1H -decoupled ^{13}C spectrum (zgdc30 / zgdc / zg0dc | C13CPD)

^1H -coupled ^{13}C spectrum (zggd30 / zggd / zg0gd | C13GD)

^1H -decoupled ^{13}C spectrum without NOE (zgig30 / zgig / zg0ig | C13IG)

^1H , ^{31}P -decoupled ^{13}C spectrum without NOE (zgfbig)

Antiring sequence (aring, aring2)

1D sequence for suppression of background signals using composite pulse (zgbss)

• Examples:

^{31}P -decoupled 1D ^1H spectrum (zgig30 / zgig | PROP31DEC)

^{11}B -decoupled 1D ^1H spectrum (zgig30 / zgig | PROB11DEC)

^1H -decoupled ^{15}N spectrum without NOE (zgig / zgf3ig | N15IG)

^1H -coupled ^{15}N spectrum without NOE (zg / N15)

^1H -decoupled ^{31}P spectrum (zgpg30 | P31CPD)

^1H -coupled ^{31}P spectrum (zg30 | P31)

• Standard BRUKER parameter sets available for other nuclei:

1D ^{11}B spectrum (zg | B11ZG)

1D ^{17}O spectrum (zg | O17ZG)

1D ^{23}Na spectrum (zg | NA23ZG)

1D ^{27}Al spectrum (zg | AL27ND)

1D ^1H -decoupled ^{29}Si spectrum (zgig | Si29IG)

1D ^{35}Cl spectrum (zg | CL35ZG)

1D ^{37}Cl spectrum (zg | CL37ZG)

1D ^{71}Ga spectrum (zg | GA71ZG)

1D ^{71}Ga spectrum (zg | SE77ZG)

1D ^{103}Rh spectrum (zg | RH103ZG)




1D ^{111}Cd spectrum (zg | CD111ZG)


1D ^{113}Cd spectrum (zg | CD113ZG)

1D ^1H -decoupled ^{119}Sn spectrum (zgig | SN119IG)



1D ^{195}Pt spectrum (zg | PT195ZG)

1D ^{199}Hg spectrum (zgpg | HG199CPD)

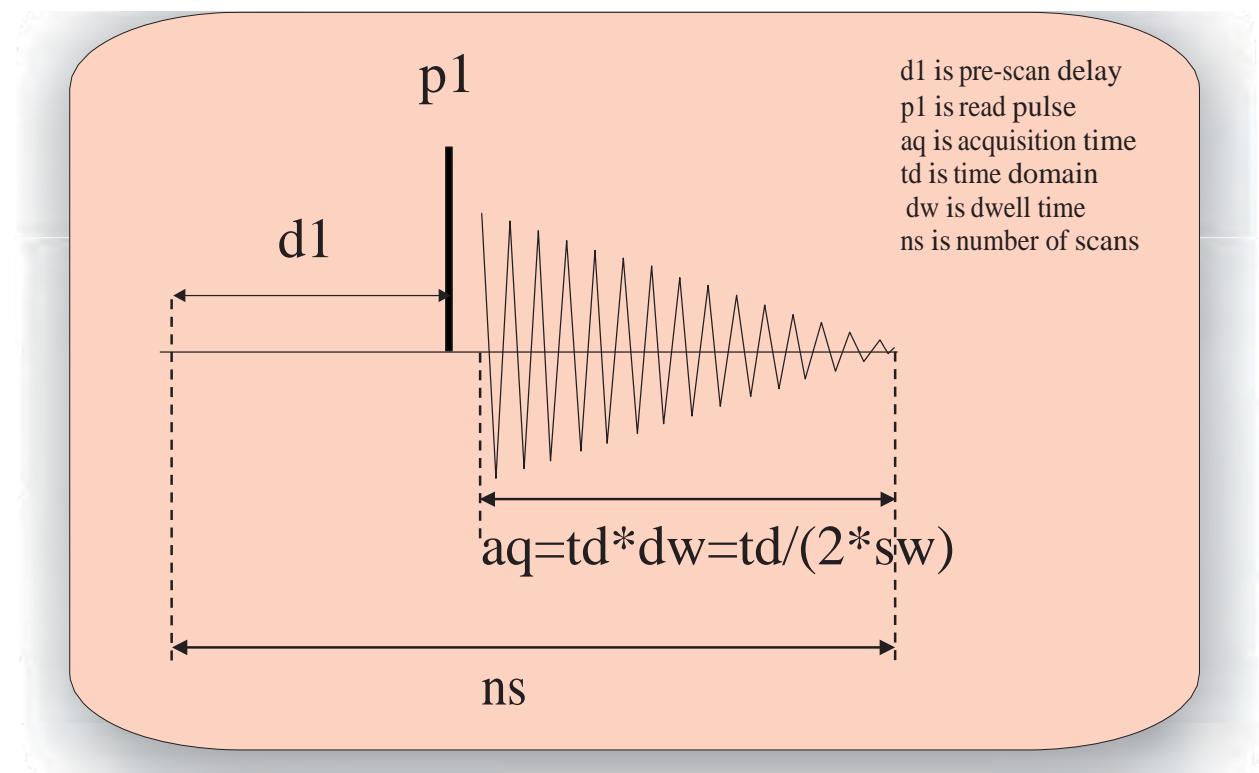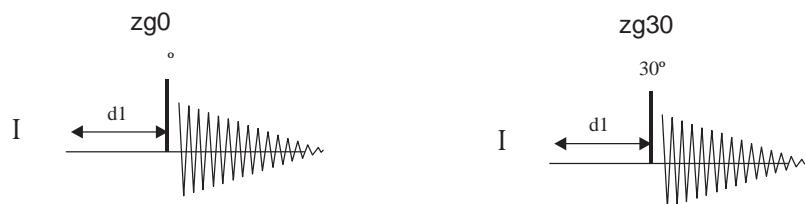


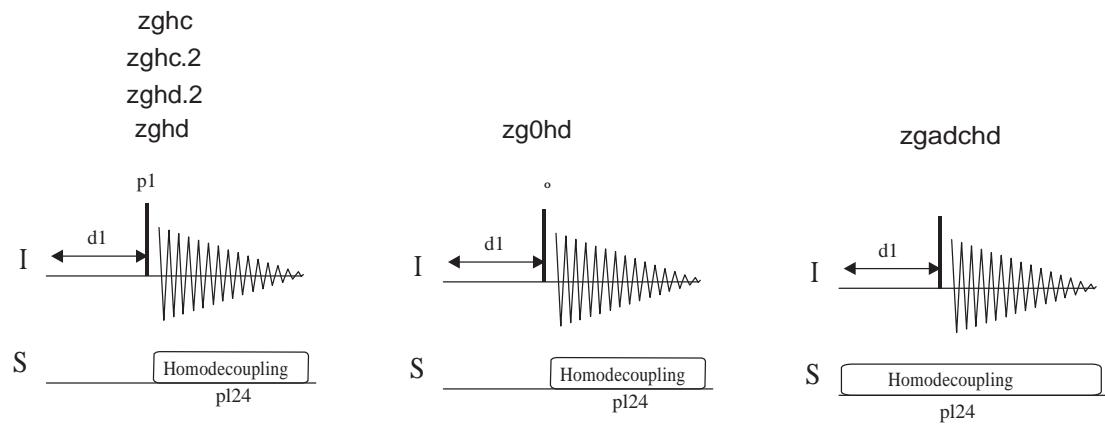


d1=3 pl24=40
o2p=1.29(H-13)
pulprog=zghd.2

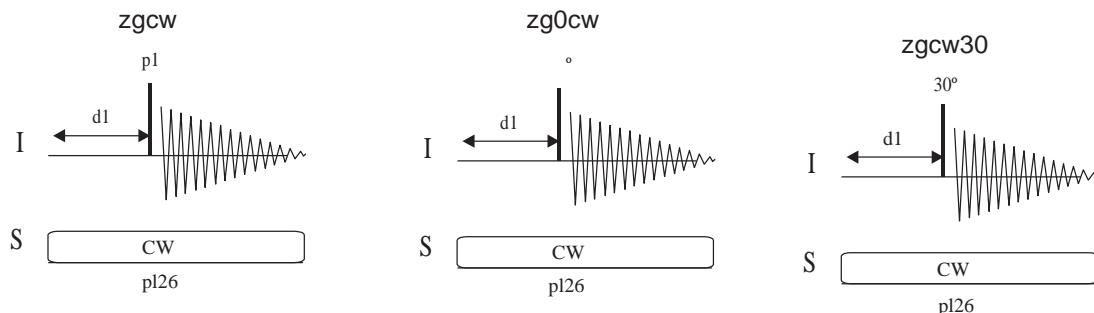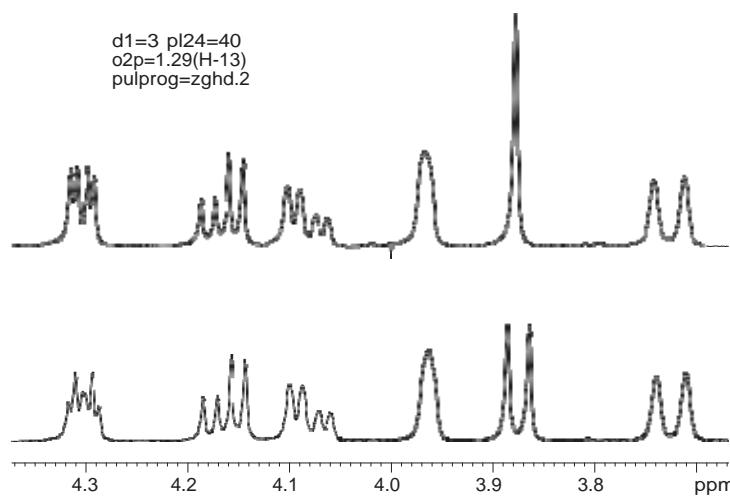


noedif.2 noediff
noemul noediff.2

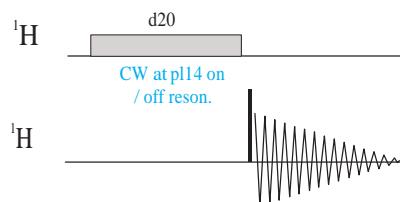


Also see: solvent suppression
(zgf2pr)

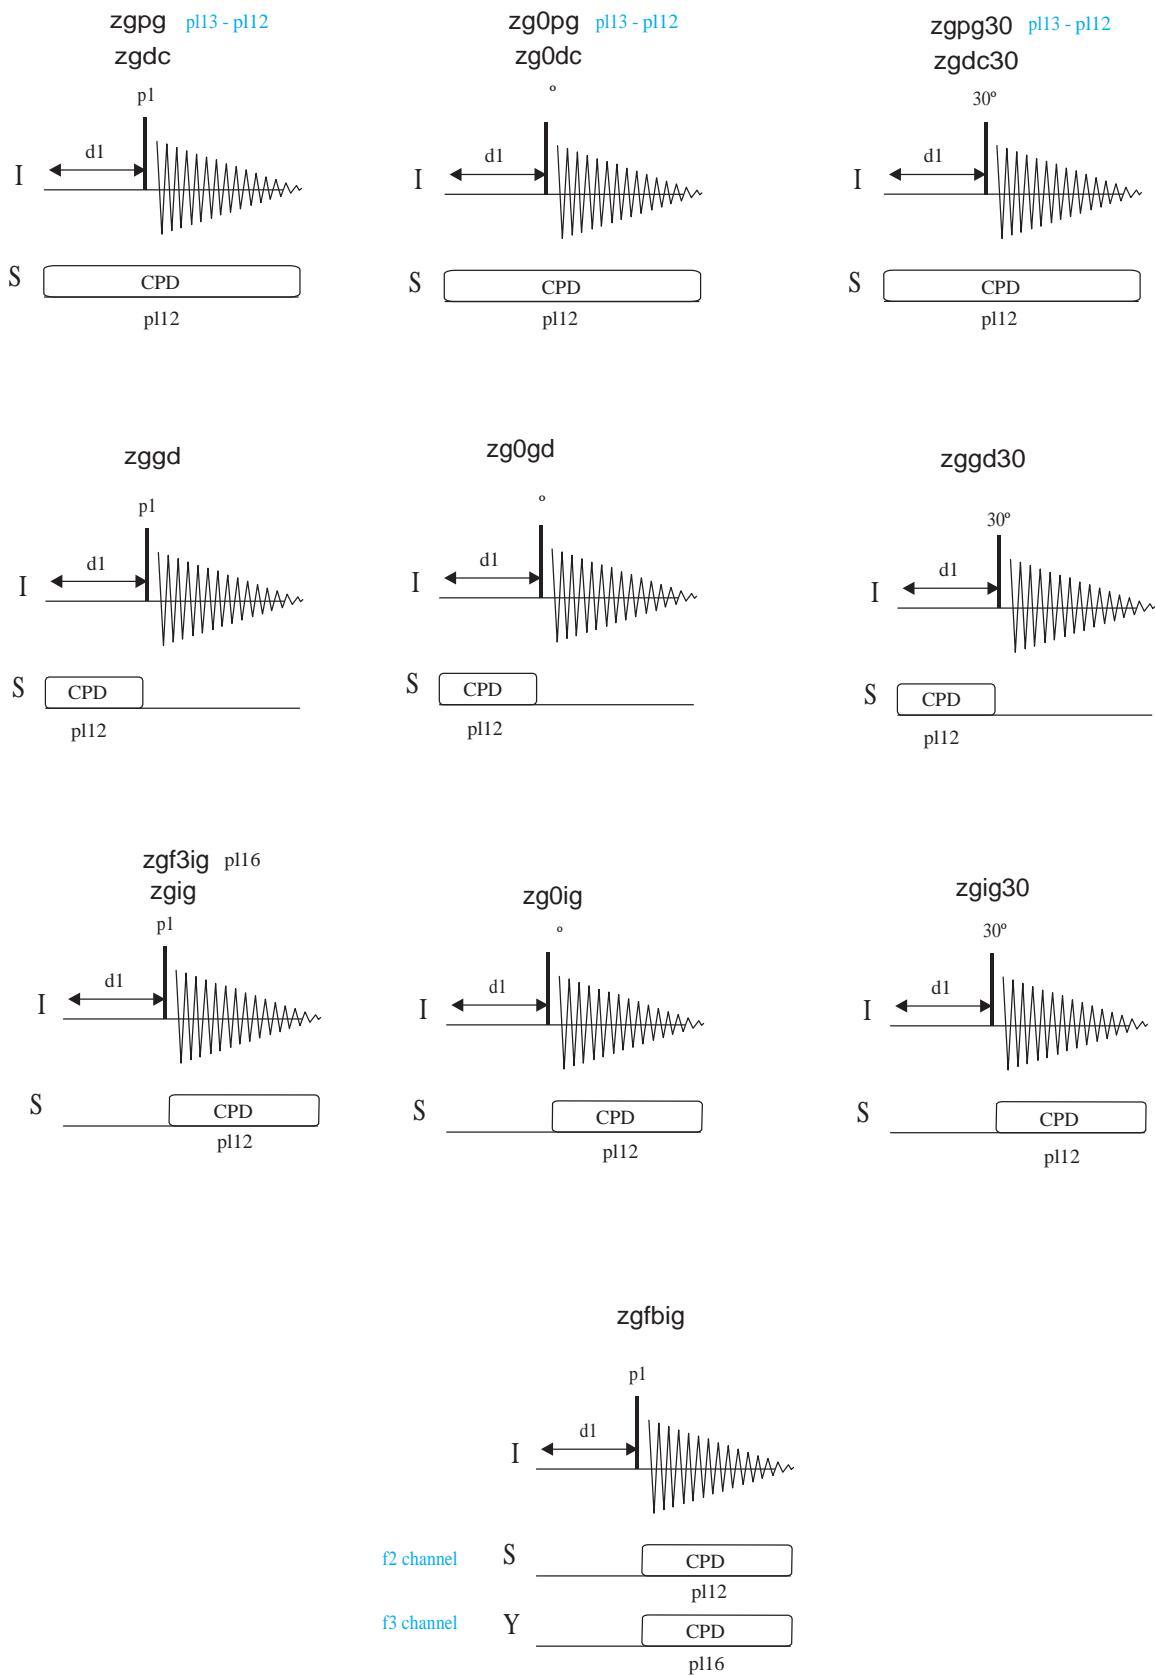


zgbs



aring

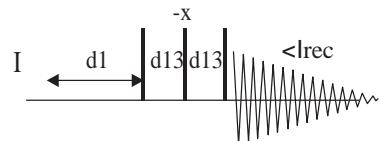

aring2

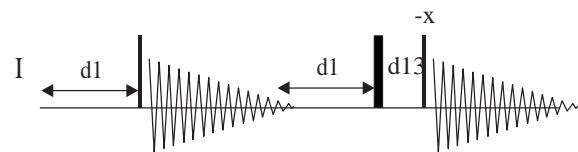

BRUKER PULSE PROGRAM CATALOGUE



NMRGuide

T1 & T2 RELAXATION

¹H T₂ measurements
 As 1D acquisition (cpmg1d)
 As 2D acquisition (cpmg)
 As 1D acquisition with presaturation (cpmgpr1d)

¹H T₁ measurements:
 As 1D acquisition (t1ir1d)
 As 2D acquisition (t1ir || PROTONT1)
 T₁ ¹³C measurements (t1irpg)


Also see: 2D HSQC for Backbone Dynamics

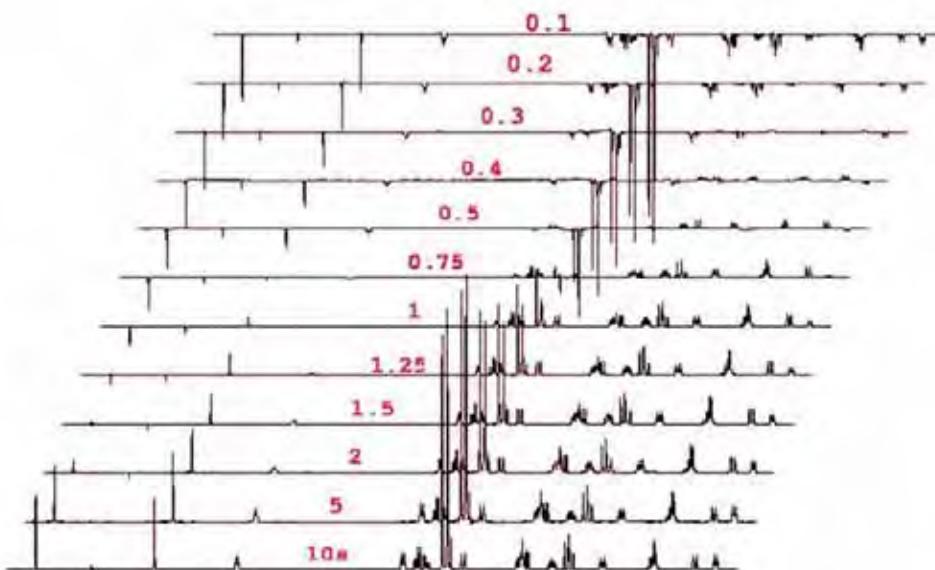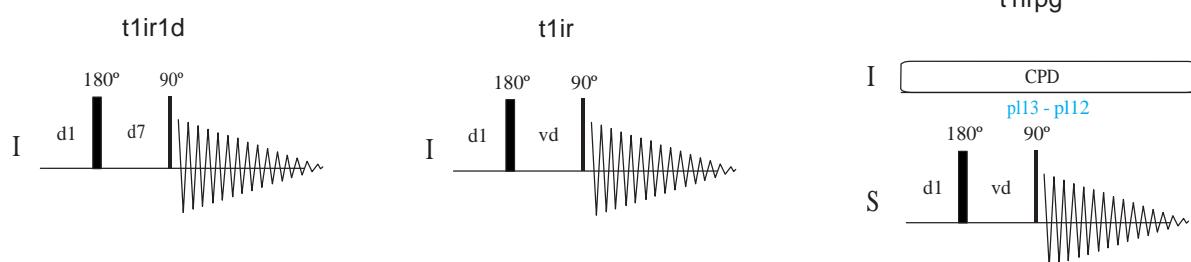

$$I_z = I_0(1 - 2\exp(-d_7/T_1))$$

$$\ln(I_0 - I_z) = \ln(2I_0) - d_7/T_1$$

$$t_{\text{null}} = T_1 * \ln 2$$

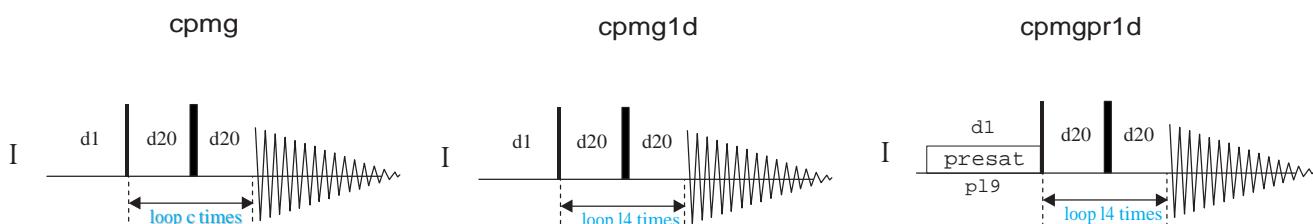

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

SELECTIVE EXCITATION &
SELECTIVE 1D EXPERIMENTS

- Phase-Cycled:

Using a shaped 90° pulse (selzg | SELZG1H)
Selective 1D COSY experiment (selco | SELCO1H)
Selective 1D RELAY experiment (selcorl)
Selective 1D TOCSY experiment (selmlzf | SELMLZF1H)
Selective 1D NOESY experiment (selno | SELNO1H)
Selective 1D ROESY experiment (selro | SELRO1H)

- Gradient-based:

Using selective pulsed-field-gradient spin-echo or SPFGE (selgpse | SELGPSE)
Selective ge-1D COSY experiment (selcogp | SELCOGP)
Selective ge-1D TOCSY experiment:
 using MLEV (selmlgp | SELMLGP)
 using MLEV With ZQ suppression (selmlgp.2)
 using DIPSI-2 (seldigp)
Selective ge-1D NOESY experiment (selnogp | SELNOGP)
Selective ge-1D ROESY experiment (selrogp | SELROGP)
Selective ge-1D T-ROESY experiment (selrogp.2)


- ¹³C Selective:

¹³C Selective excitation using a shaped 90° pulse (selzgpg)
Selective 1D X-X COSY experiment (selcogp)
Selective 1D INADEQUATE experiment (selina)


- Miscellaneous:

2-2-6-2-2 DANTE-z scheme (dazzg)
3-6-3 DANTE-z scheme (daz363zg)
1-1 DANTE-z scheme (daz11zg)


selzg




selco

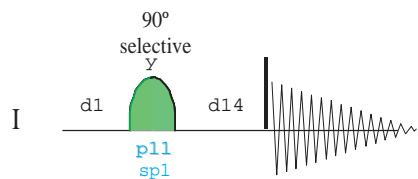


selcorl

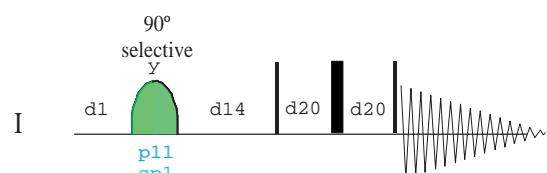


selmlzf

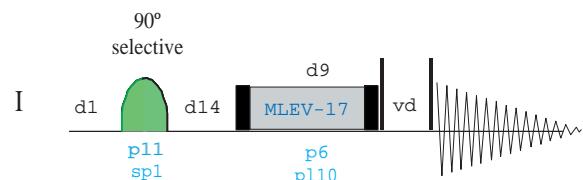




selro

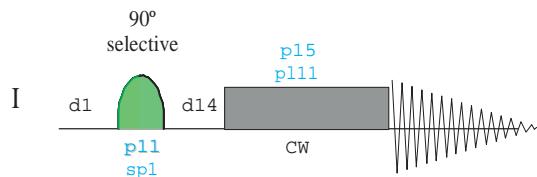


selno

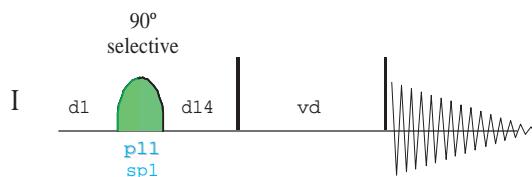

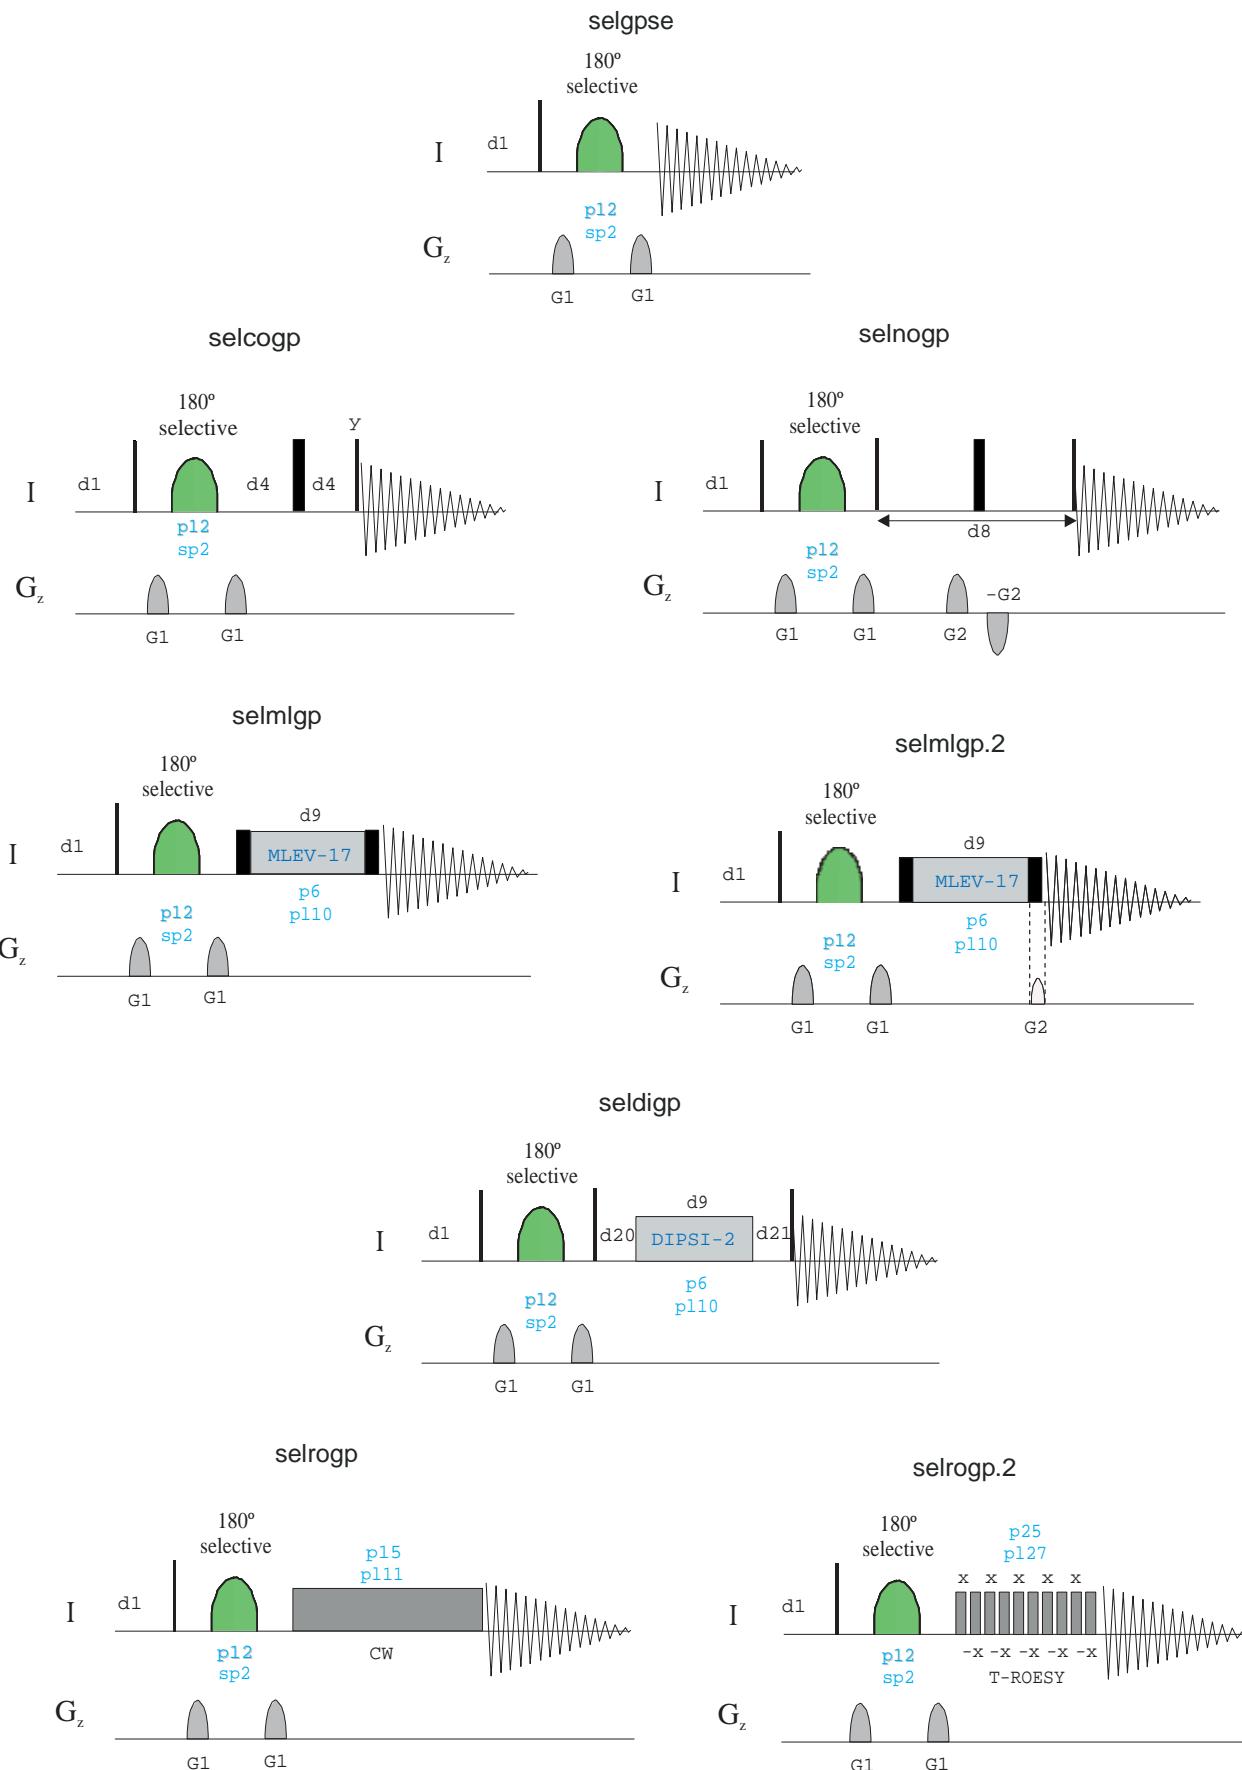


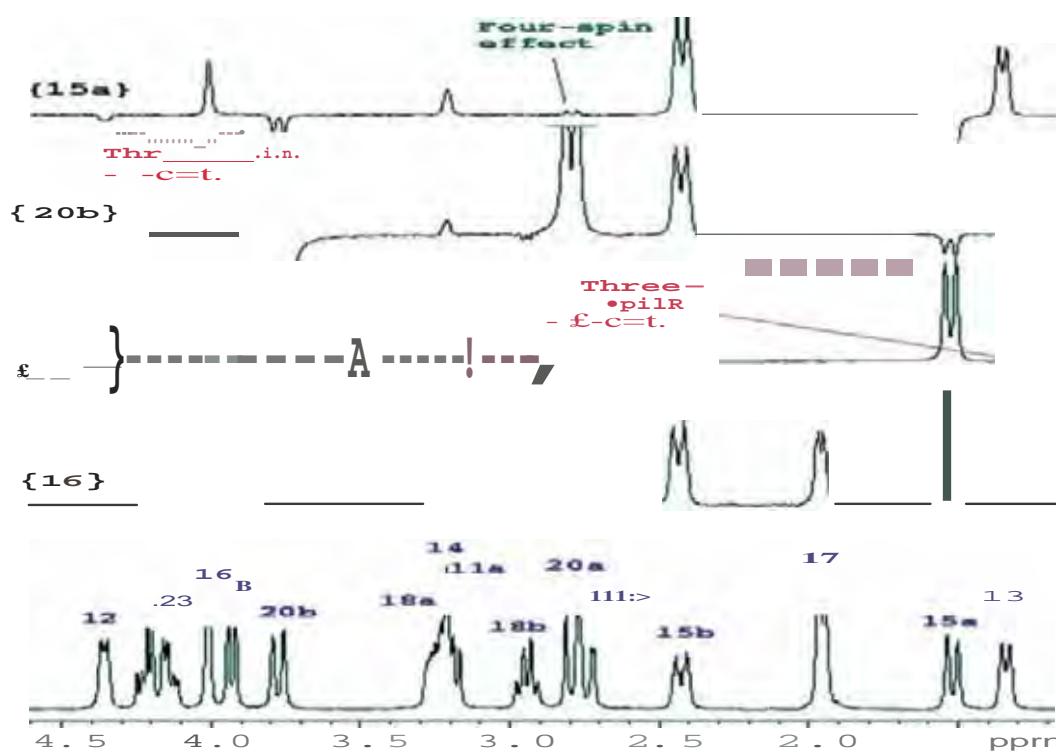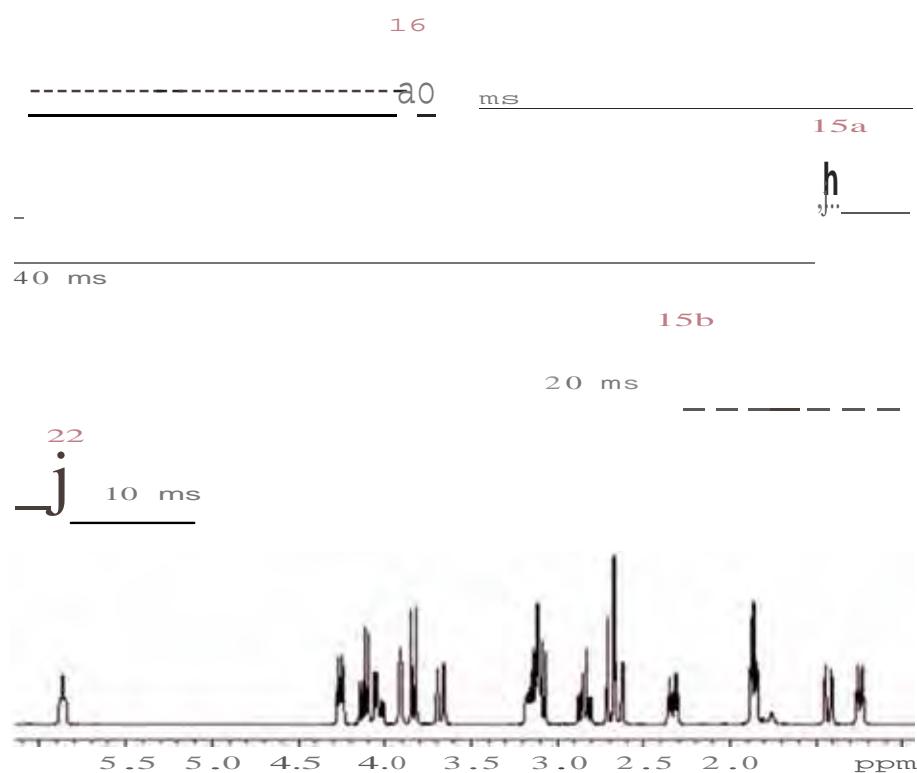


selzgpg



selcpg

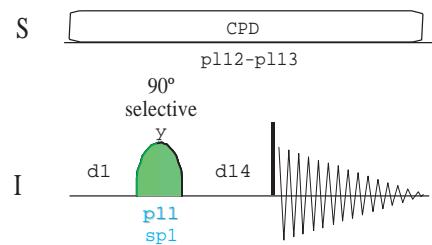


selina

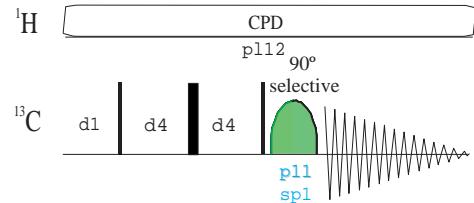

dazzg

daz11zg

daz363zg

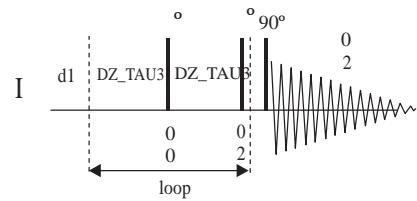

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

1D SOLVENT SUPPRESSION

1D Solvent suppression

Classical:

1D water presaturation:

- Conventional (zgpr / zg0pr | ZGPR)
- Using composite pulses (zgcppr | ZGCPPR)
- Using spoil gradient (zggppr)
- Using composite pulse and spoil gradient (zgcpgppr)
- From f2 channel (zgf2pr / zg0f2pr)
- Using shaped pulse for off-resonance presaturation (zgps)

Jump and return:

- 1-1 scheme (p11)
- 1-3-3-1 scheme (p1331)

Gradient-based:

1D WATERGATE:

- Using 3-9-19 scheme (p3919gp | P3919GP)
- Using 3-9-19 and flip back pulse (p3919fpfp)
- Using 90° water-selective pulses (zggpwg | ZGGPWG)

1D Excitation Sculpting:



- Using 180° water-selective pulses (zgesgp)
- Using 180° water-selective and flip back pulse (zgesfpfp)
- Using W5 pulse train (zggpw5)

1D WET scheme:



- Conventional (wet)
- With ^{13}C decoupling on f2 during WET and AQ (wetdc | LC1DWTDc)
- With ^{13}C decoupling on f2 during WET (wetdw)

Related Experiments:


- All these 1D experiments can be incorporated in any multidimensional NMR experiment. Please refer to each chapter to check the different possibilities for 2D and 3D solvent-suppressed experiments
- LC-NMR Experiments

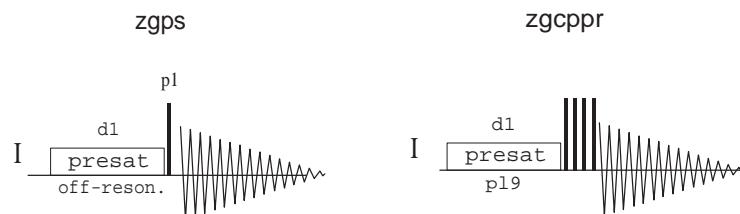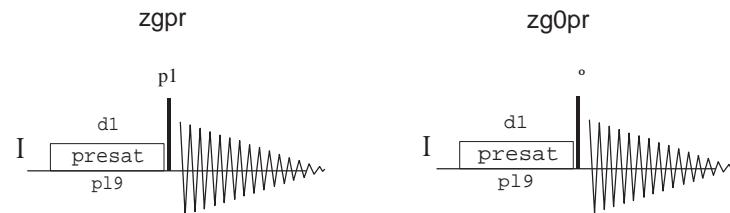


Also see: LC-NMR experiments

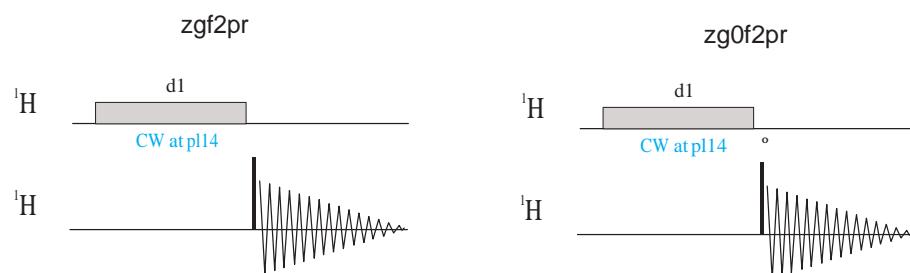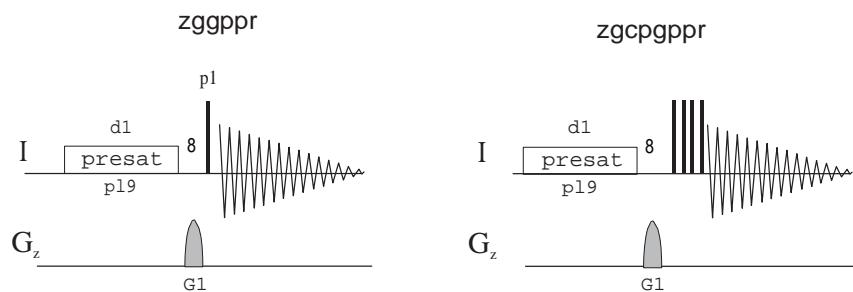


Also see: noediff

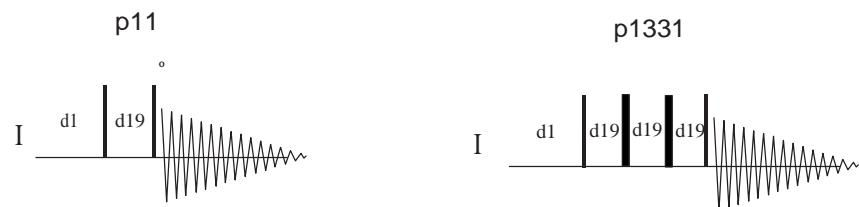


p3919gp

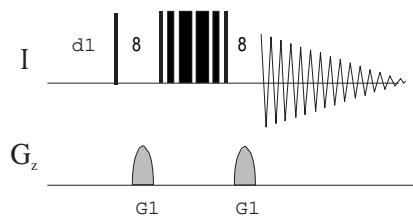


p3919fpgp

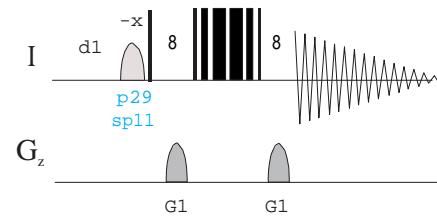


zggpwg

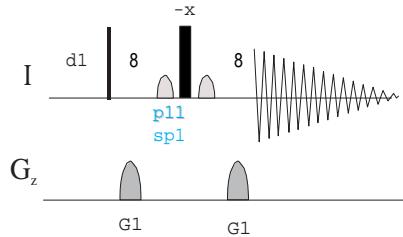


zggpw5

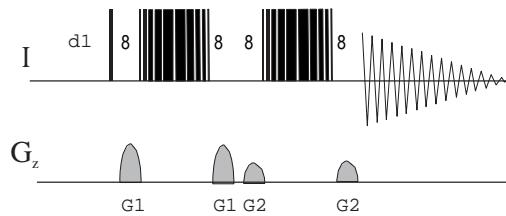





zgesgp

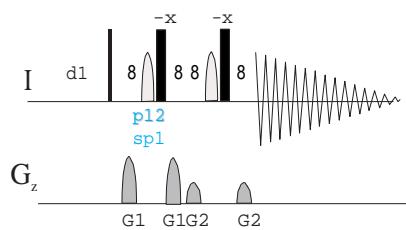

zgesfpgp

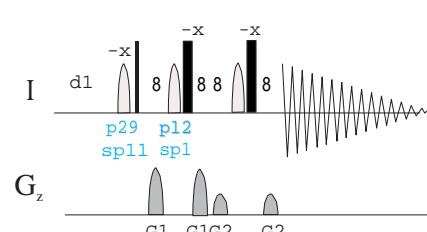

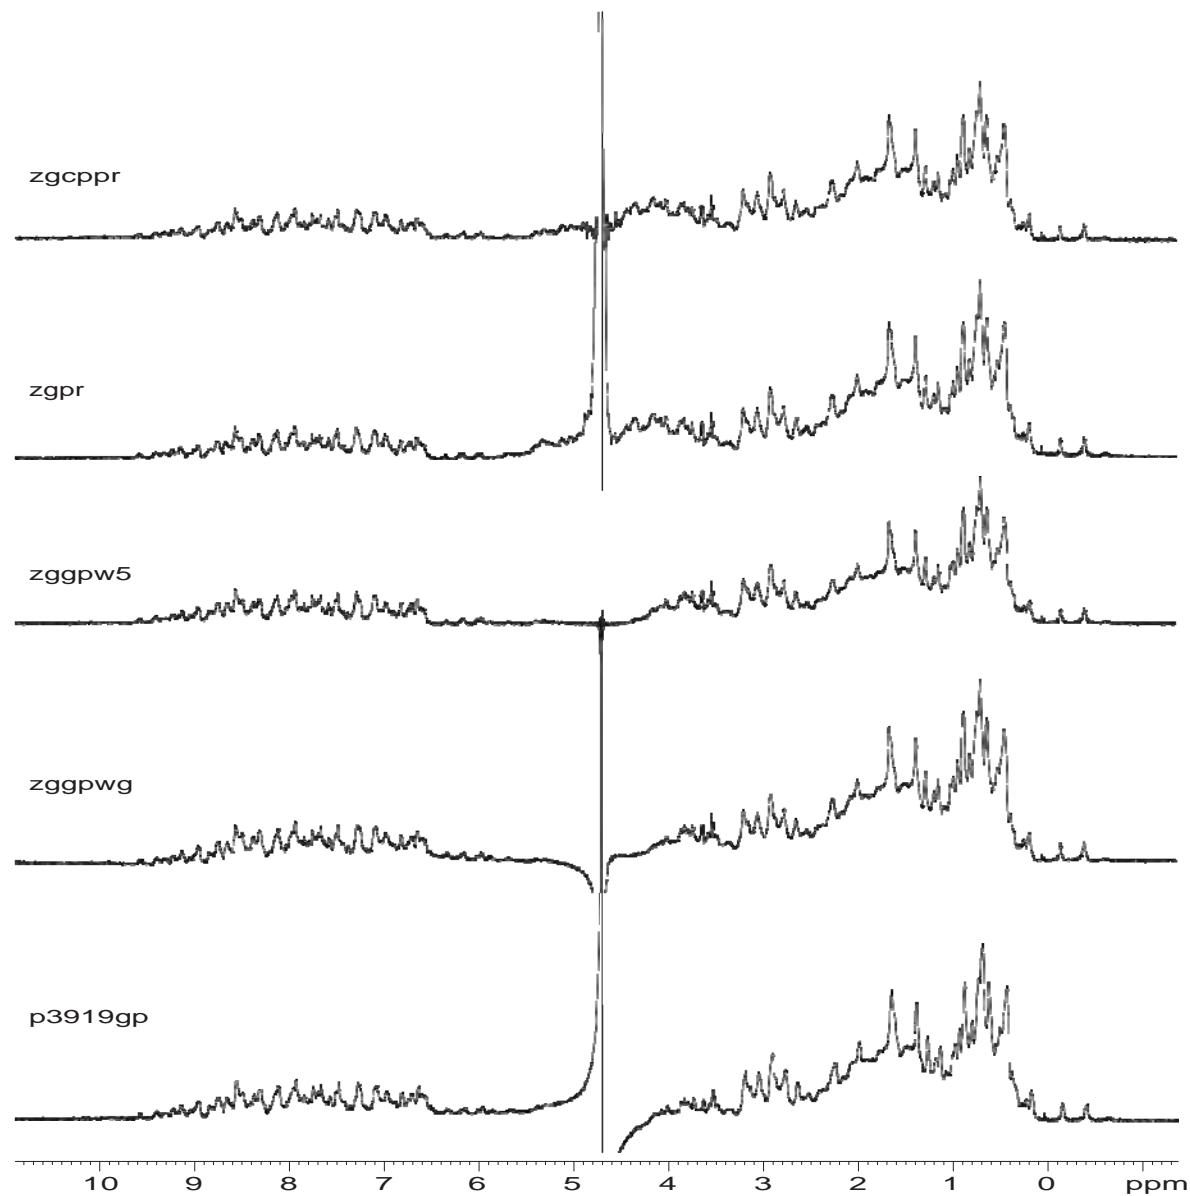

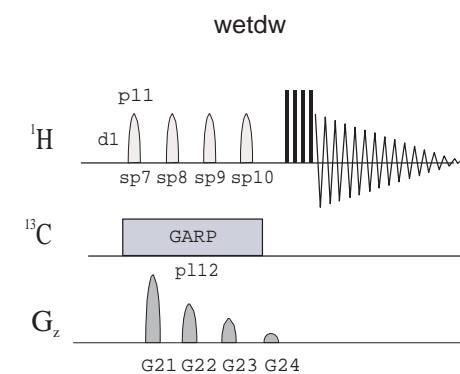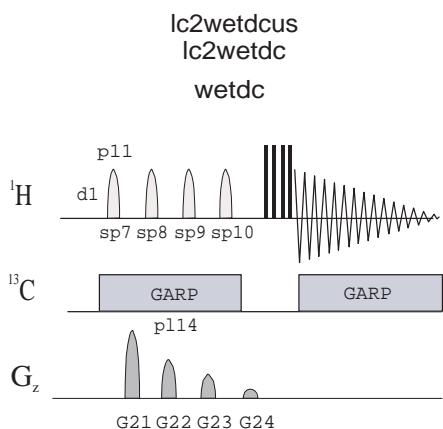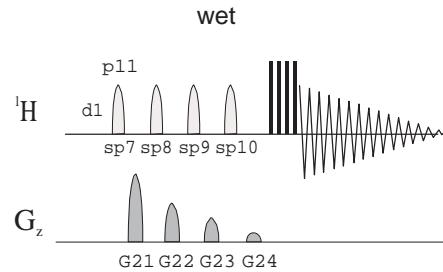

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

¹⁹F SPECIFIC EXPERIMENTS

¹⁹F Experiments

1D spectra:

¹H-decoupled ¹⁹F spectrum (zgfhqgn / zgfhqgn.2 | F19CPD)

¹H-coupled ¹⁹F spectrum (zgflqn | F19)


¹⁹F-homodecoupled ¹⁹F spectrum (zhflhdqn)

¹⁹F-decoupled 1D ¹H spectrum (zghfqgn / zghfqgn30 | PROF19DEC)
¹H spectrum with ¹⁹F-presaturation (zgf2hfpr)

2D spectra:

2D ¹⁹F-¹H HETCOR experiment (hfcoqfqn)

2D ¹⁹F-¹H HOESY experiment (hoesyfhqfqnrv)

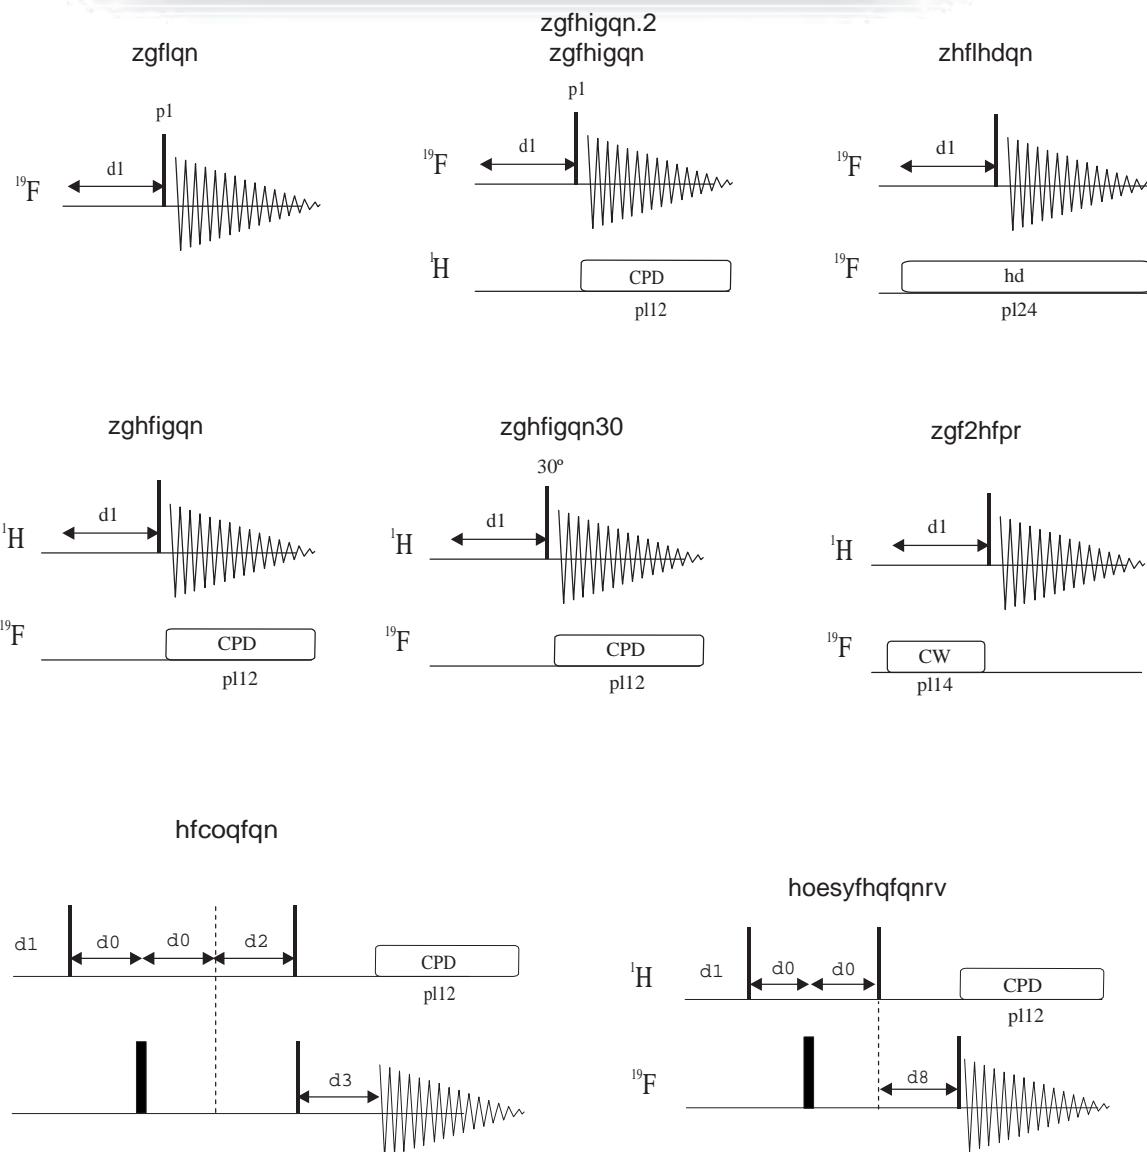

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

²H SPECIFIC EXPERIMENTS

- **1D spectra:**

1D ^2H spectrum (zg2h)
1D X-decoupled ^2H spectrum (zgig2h, zgig2hf4)

- **2D spectra:**


Magnitude-mode 2D HETCOR with ^2H -decoupling (hxcoqf2h)

- **Miscellaneous:**

High-power 90° ^2H decouple pulse calibration (decp902h, decp902hf4)

Related Experiments:

- Also see: 2H-decoupled 3D triple-resonance experiments

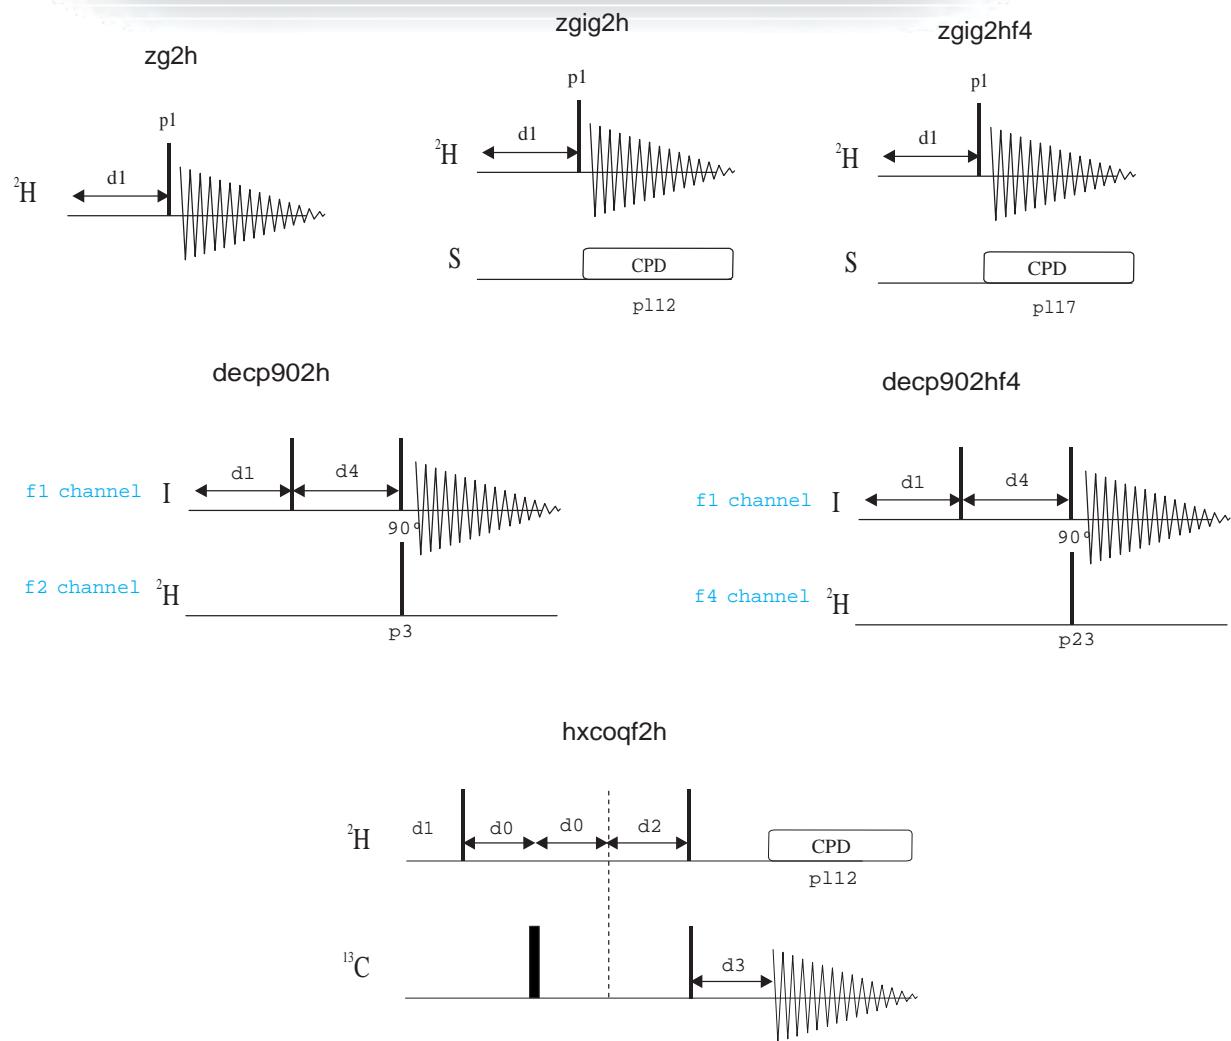

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

BASIC 1D GRADIENTS

- Standard:

Gradient-enhanced 1D Echo experiment (zggegp)
Gradient-enhanced 1D Spin-Echo experiment (zggpse)


- Gradient Calibration:

Gradient Strength Calibration (calibgp)
Gradient Preemphasis Adjustment. Gradient Recovery Test (prempgp2)


- Gradient shimming:

1D Gradient Echo for gradshim-procedure (imgegp1d)
1D Gradient Echo for gradshim-procedure using 2H (imgegp1d2h)
1D Gradient Echo for gradshim-procedure using selective pulse (imgegp1d)


3D Gradient Echo for gradshim-procedure (imgegp3d)
3D Gradient Echo for gradshim-procedure with BSMS RCB board(imrcbgcgp3d)

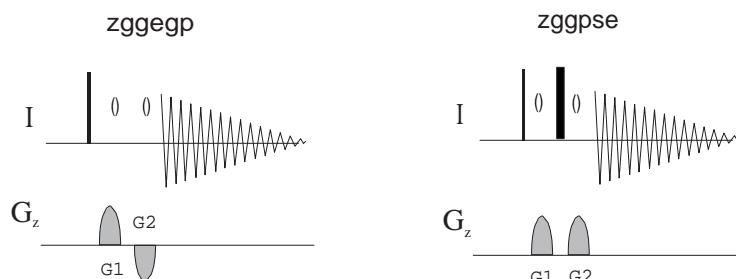


prempgp2



imgegp1d



calibgp



BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D COSY EXPERIMENTS

Phase-cycled:

Magnitude-mode 2D COSY (cosyqf | COSY45SW / COSY90SW)
Magnitude-mode 2D COSY using a 45 pulse (cosyqf45 | COSY45SW)
Magnitude-mode 2D COSY using a 90 pulse (cosyqf90 | COSY90SW)
Magnitude-mode 2D COSY using purge pulses before d1 (cosyppqf)
Phase-sensitive 2D COSY (cosyph)

Magnitude-mode Long-Range optimized 2D COSY (cosylrqf)

Constant-Time 2D COSY (cosyjdqf)

Phase-cycled and solvent suppression:

Magnitude-mode 2D COSY with presaturation (cosyprqf)
Phase-sensitive 2D COSY with presaturation (cosyphpr | COSYPHPR)

Gradient-based:


Magnitude-mode ge-2D COSY (cosygpf | COSYGPSW)
Magnitude-mode ge-2D COSY using purge pulses before d1 (cosygppqf)
Phase-sensitive ge-2D COSY using echo-antiecho (cosyetgp)


Miscellaneous:

Phase-sensitive ω_1 -region-selective 2D COSY (scosyph)
Phase-sensitive ω_1 -region-selective 2D COSY with refocusing (scosyphrd)

Phase-sensitive 2D COSY with off-resonance single or multiple presaturation
(cosycwphps | COSYCWPBPS)


Magnitude-mode 2D ^{13}C - ^{13}C COSY (cosydcqf)
Magnitude-mode long-range optimized 2D ^{13}C - ^{13}C COSY (cosydclrqf)
Phase-sensitive 2D ^{13}C - ^{13}C COSY (cosydcph)

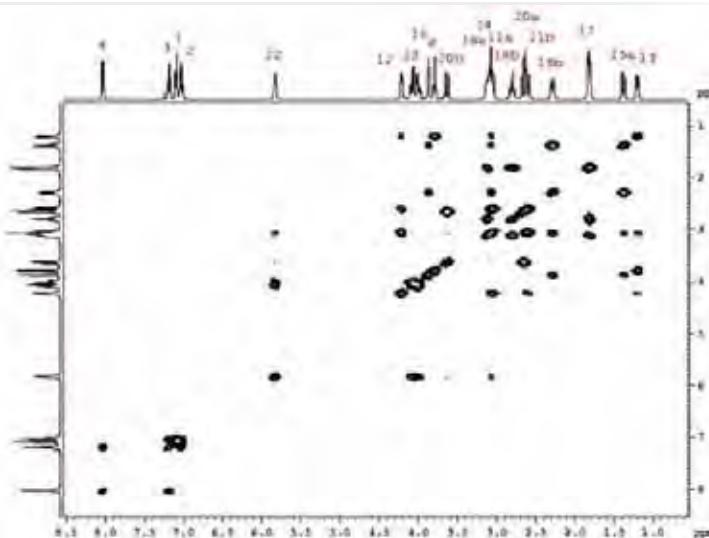

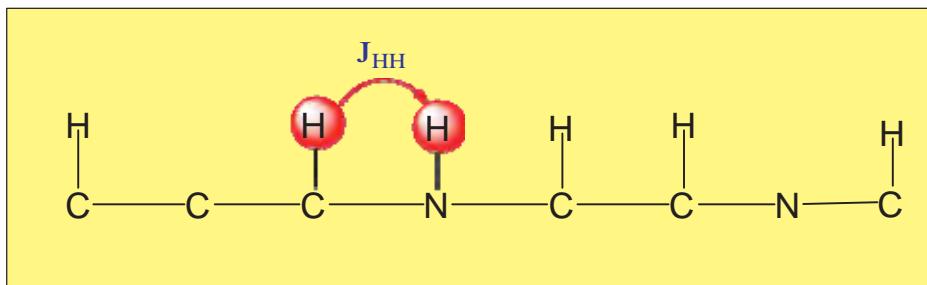


cosyph


cosyqf

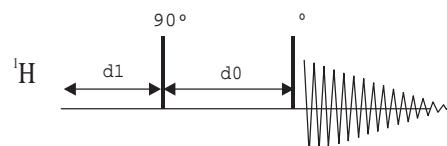


cosyqf45

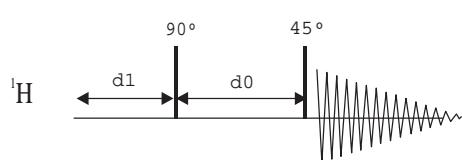


cosyqf90

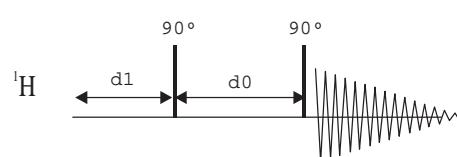


cosyppqf

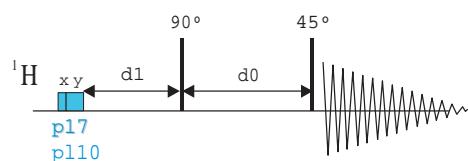


cosyphpr

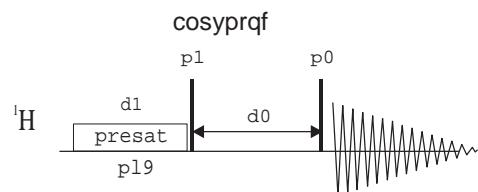


cosylrqf

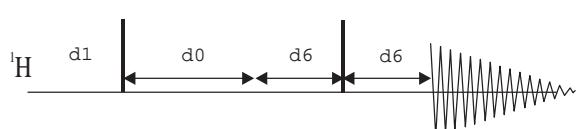

cosyjdqf

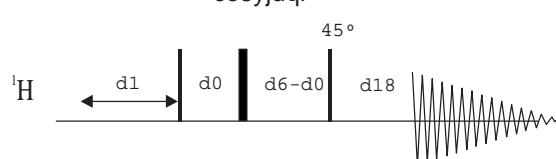

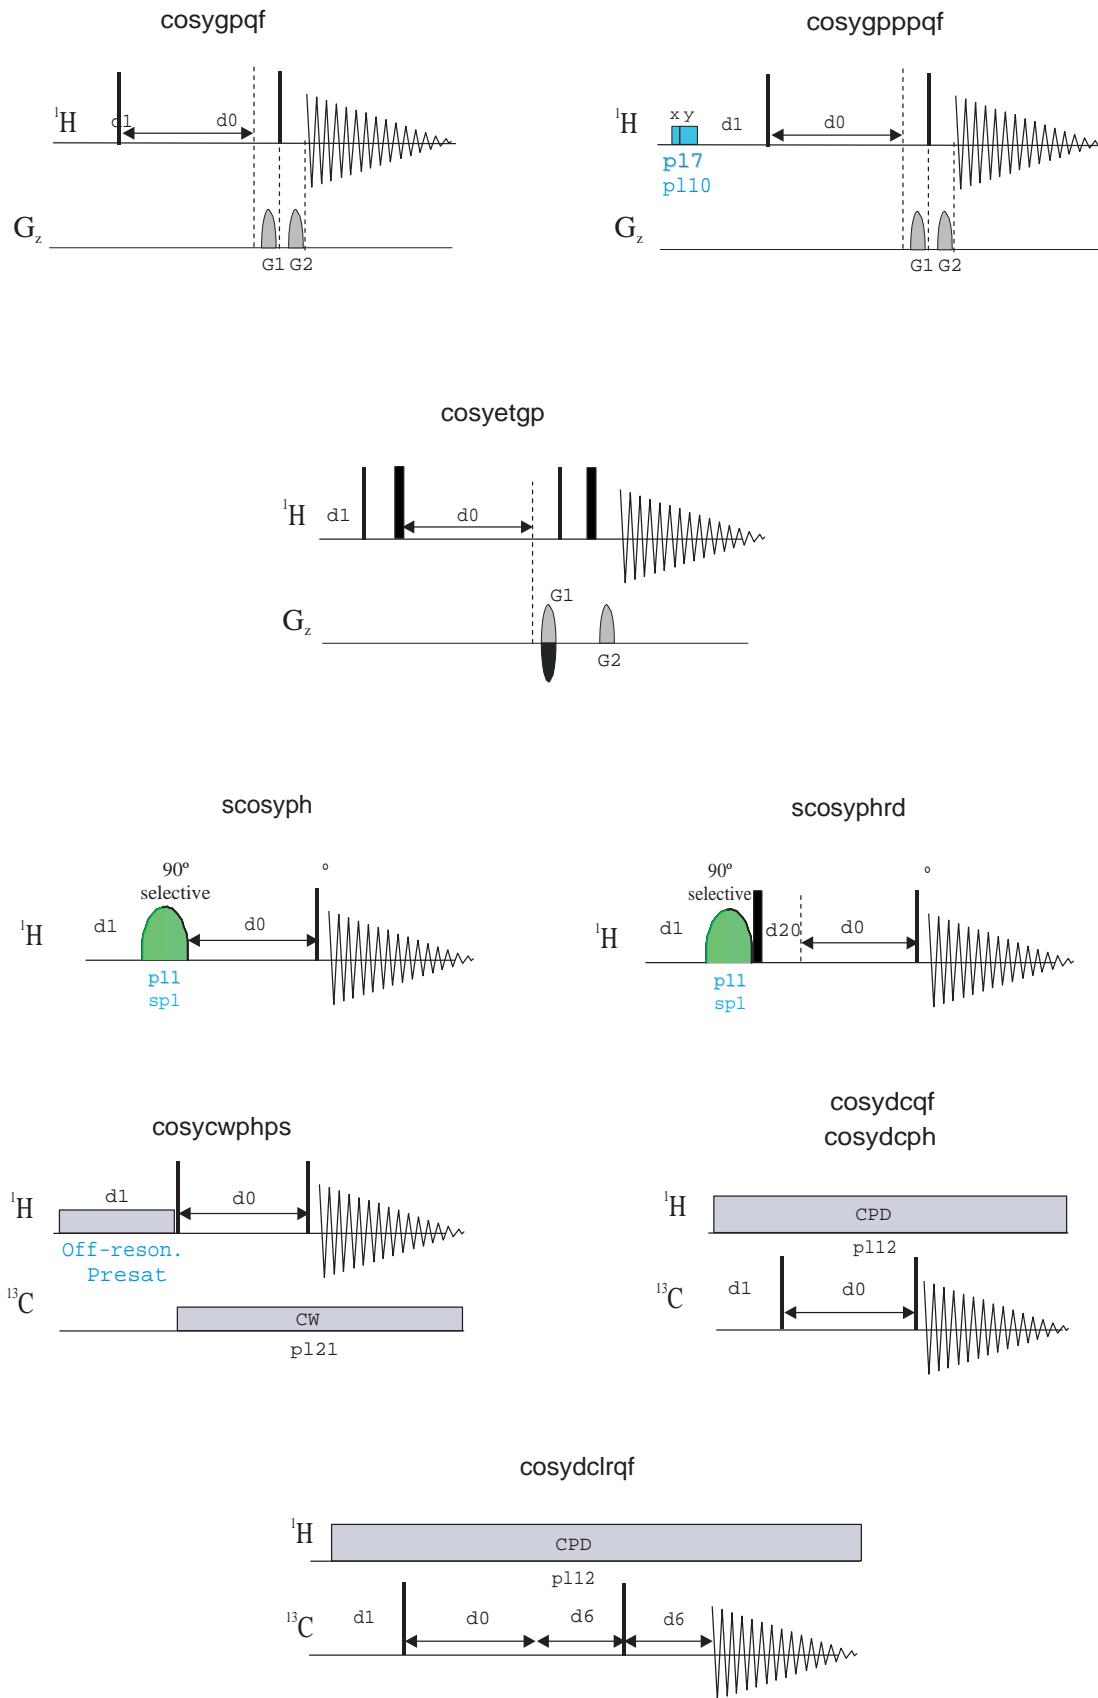

BRUKER
PULSE PROGRAM
CATALOGUE

NMRGuide

2D COSY-DOF EXPERIMENTS

• Phase-cycled:

Magnitude-mode 2D COSY with DQF (cosydfqf)
Magnitude-mode 2D COSY with TQF (cosyqftf)
Phase-sensitive 2D COSY with DQF (cosydfph | COSYDQFPHSW)
Phase-sensitive 2D COSY with TQF (cosyptf)

Phase sensitive 2D E.COSY -KcMAX=3 (ecos3nph)
Complementary Phase sensitive 2D E.COSY - KcMAX=3 (ecos3cph)

• Phase-cycled and solvent suppression:


Phase-sensitive 2D COSY with DQF & presaturation (cosydfphpr)


• Gradient-based:

Magnitude-mode ge-2D COSY with multiple-quantum filter (cosygpmfqf | COSYGPMFSW)
Phase-sensitive ge-2D COSY with multiple-quantum filter (cosygpmfpf | COSYGPDPHSW)
Phase-sensitive ge-2D COSY with DQF using echo-antiecho (cosydfetgp.1)
Phase-sensitive ge-2D COSY with gradient-based DQF using echo-antiecho (cosydfetgp.2)
Gradient E.COSY (ecosygpph)



• Gradient-based and solvent suppression:

Phase-sensitive 2D COSY-DQF with WATERGATE using 3-9-19 (cosydfgpph19)
Phase-sensitive 2D COSY-DQF with Excitation Sculpting using 180 water-selective pulse (ES element) (cosydfesgpph)

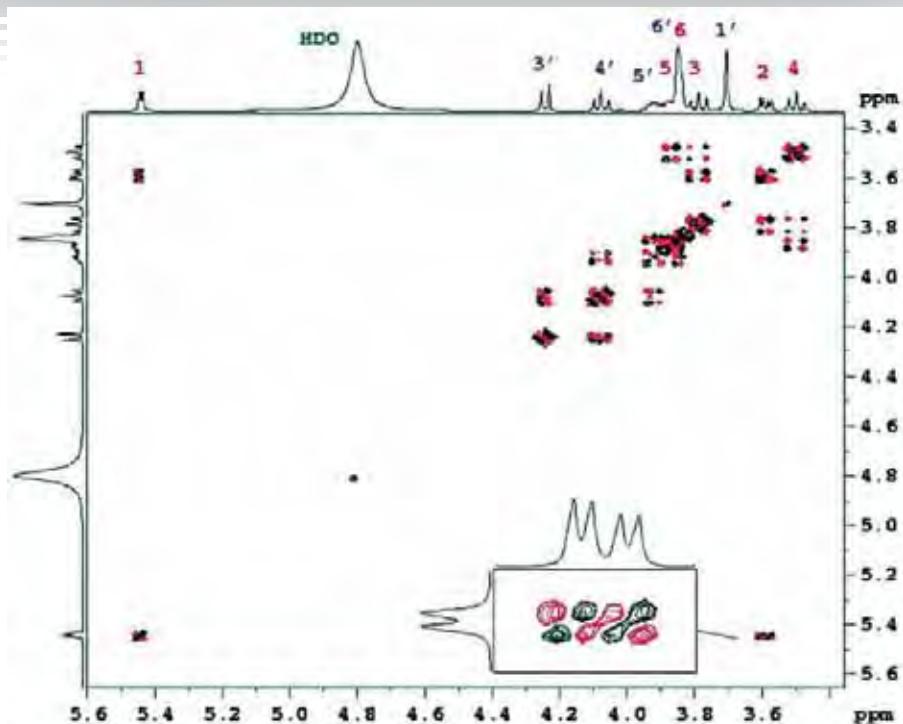


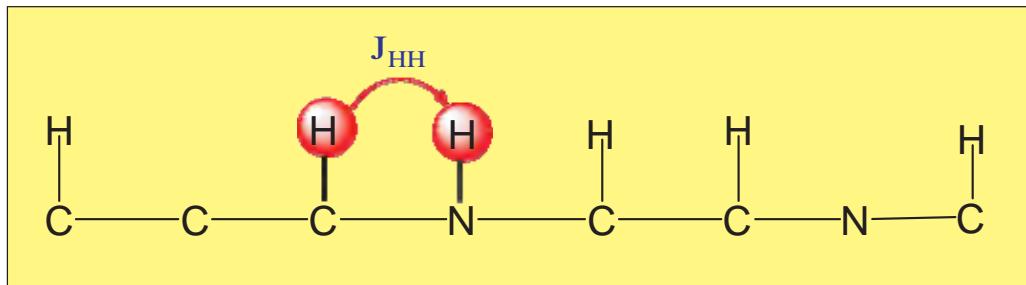


cosydfph cosyphft ecos3cph
cosydfqf cosyqftf ecos3nph

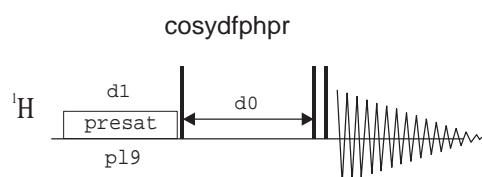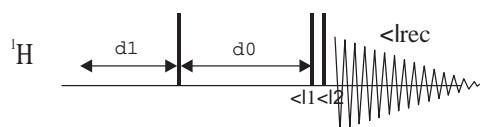


ecosygpph

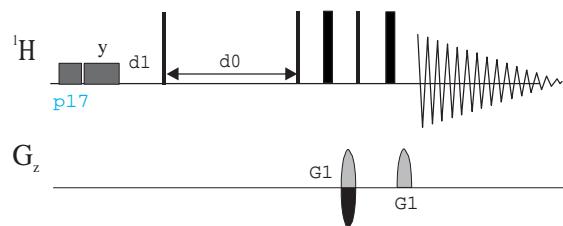


cosygpmfqf

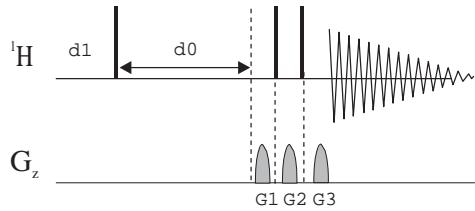


cosygpmfph

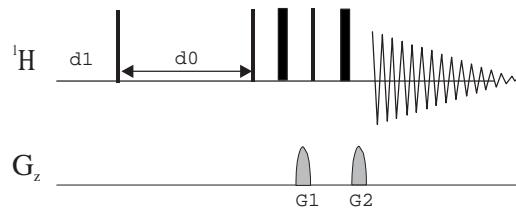


cosydfetgp.1

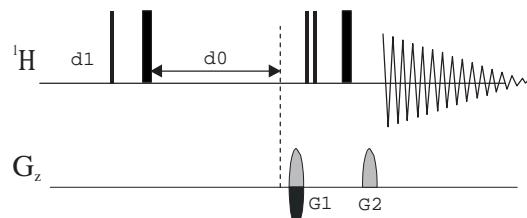


cosydfetgp.2

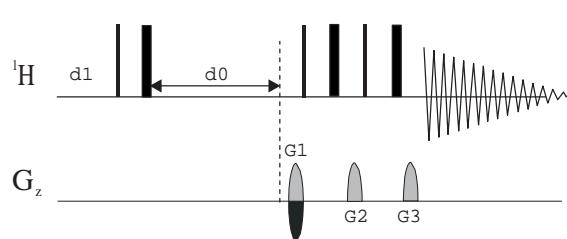

cosydfgpph19

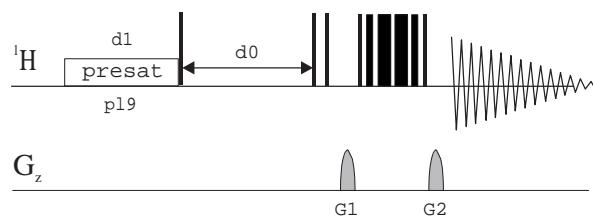

cosydfesgpph

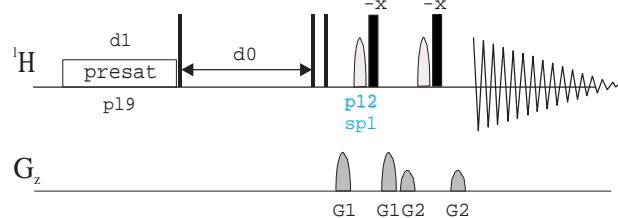


BRUKER PULSE PROGRAM CATALOGUE

NMRGuide


2D SECSY EXPERIMENTS

Magnitude-mode 2D SECSY (secsyqf)
Magnitude-mode long-range optimized 2D SECSY (secsylrqf)

secsyqf

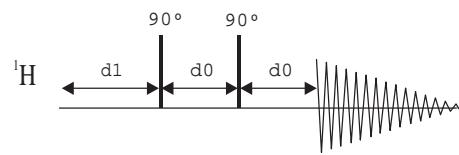

secsylrqf

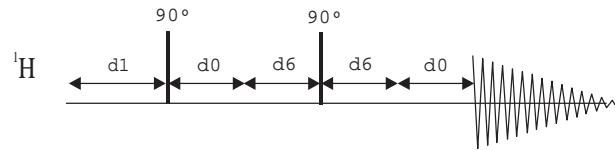


BRUKER PULSE PROGRAM CATALOGUE


NMRGuide

2D RELAYED EXPERIMENTS

Magnitude-mode one-step 2D RELAY (cosyqfrl)
Magnitude-mode one-step 2D RELAY with incremented mixing times (cosyimqfrl)
Magnitude-mode two-step 2D RELAY (cosyqfr2)
Magnitude-mode two-step 2D RELAY with incremented mixing times (cosyimqfr2)
Magnitude-mode three-step 2D RELAY (cosyqfr3)

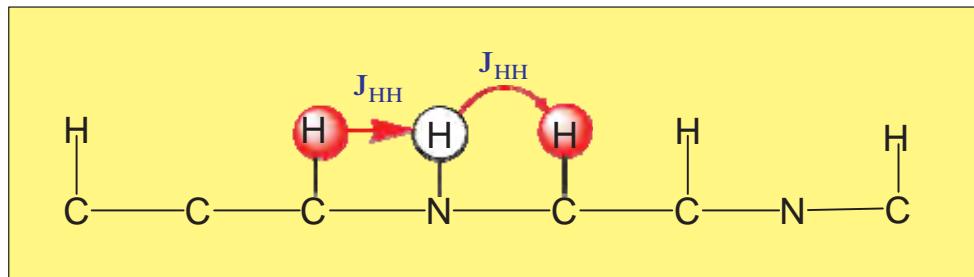


cosyqfrl

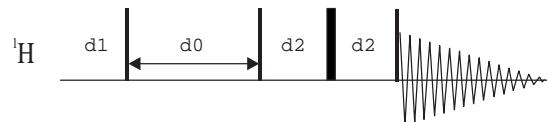


cosyimqfrl




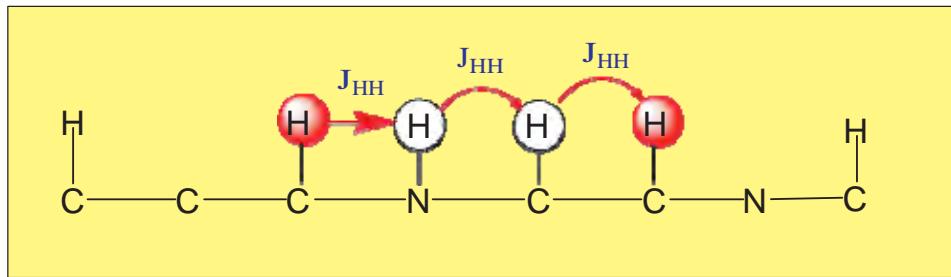


cosyqfr2

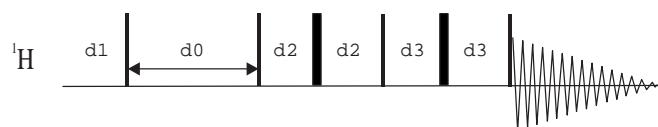

cosyimqfr2

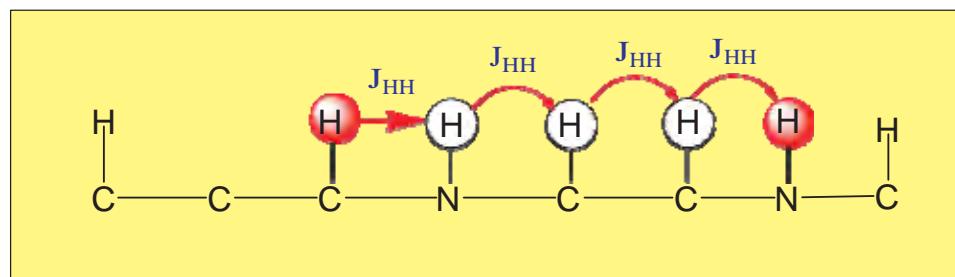

cosyqfr3

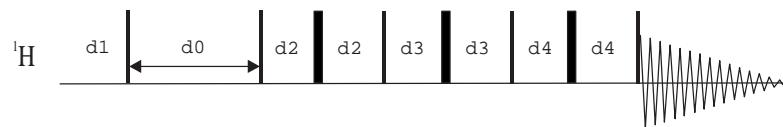

BRUKER
PULSE PROGRAM
CATALOGUE

NMRGuide

2D TOCSY EXPERIMENTS

Phase-cycled

Phase-sensitive 2D TOCSY using MLEV (mlevph | MLEVPHSW)
Phase-sensitive 2D TOCSY using MLEV with purge pulses before d1 (mlevphpp)
Phase-sensitive 2D TOCSY using DIPSI-2 (dipsi2ph)

Phase-cycled and solvent suppression

Phase-sensitive 2D TOCSY with presaturation using MLEV (mlevphpr | MLEVPHPR)
Phase-sensitive 2D TOCSY with presaturation using MLEV only using first trim pulse
(mlevphpr.2 | H2OSUPMLEV)
Phase-sensitive 2D TOCSY with presaturation using DIPSI-2 (dipsi2phpr)
Phase-sensitive 2D Clean-TOCSY with presaturation using MLEV (clmlevphpr)

Gradient-based

Phase-sensitive ge-2D TOCSY with MLEV using echo-antiecho (mlevetgp)
Phase-sensitive ge-2D TOCSY with DIPSI-2 using echo-antiecho (dipsi2etgp)
Phase-sensitive ge-2D TOCSY with DIPSI-2 using PEP (dipsi2etgpsi)


Gradient-based and solvent suppression

Phase-sensitive 2D TOCSY with WATERGATE (3-9-19) using MLEV (mlevgpph19 | MLEVGPPI9SW)
Phase-sensitive 2D TOCSY with WATERGATE (3-9-19) using DIPSI-2 (dipsi2gpph19)
Phase-sensitive sensitivity-improved 2D TOCSY with WATERGATE (3-9-19) and using DIPSI-2 (dipsi2etgpsi19)
Phase-sensitive 2D Adiabatic TOCSY with WATERGATE (3-9-19) using X_M16 sequence (atocsygpph19)


Phase-sensitive 2D TOCSY with excitation sculpting (W5) using MLEV (mlevgpphw5)
Phase-sensitive 2D TOCSY with excitation sculpting (180 water-selective pulse-ES element) using MLEV (mlevesgpph)
Phase-sensitive 2D TOCSY with excitation sculpting (180 water-selective pulse-ES element) using DIPSI-2 (dipsi2esgpph)

Related Experiments:


- LC-NMR Experiments

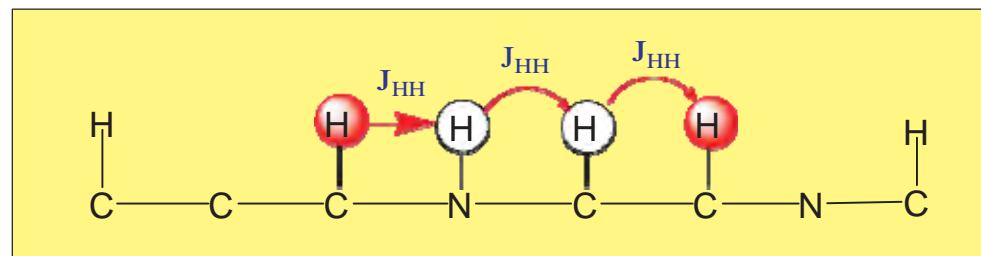


mlevph

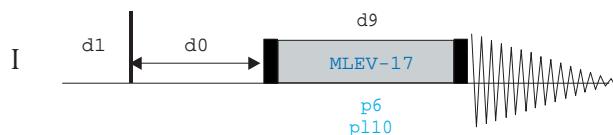


mlevphpp

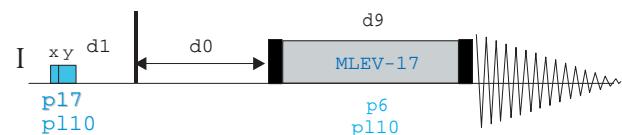


mlevphpr

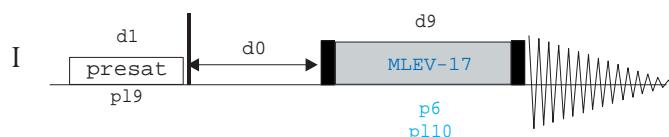


mlevphpr.2

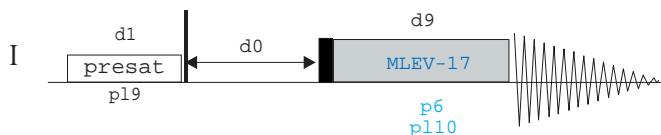


clmlevphpr

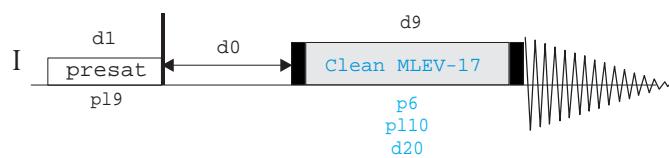


dipsi2ph

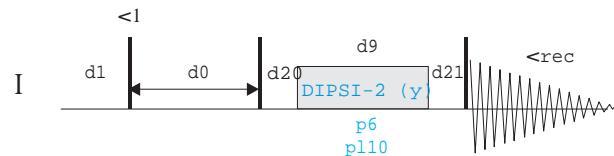


dipsi2phpr

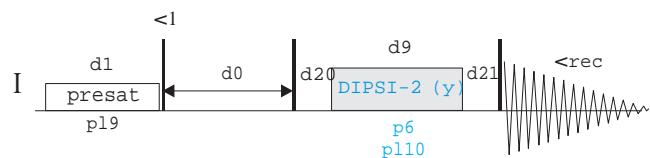



mlevetgp

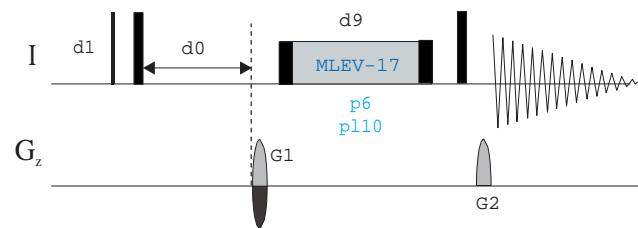


dipsi2etgp

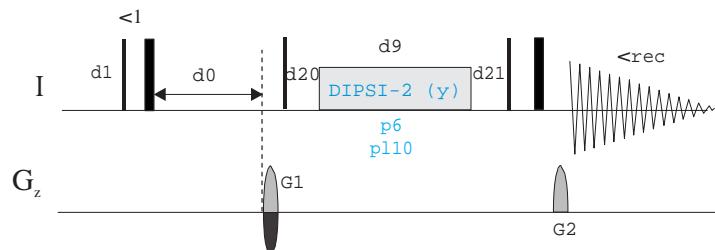


dipsi2etgpsi

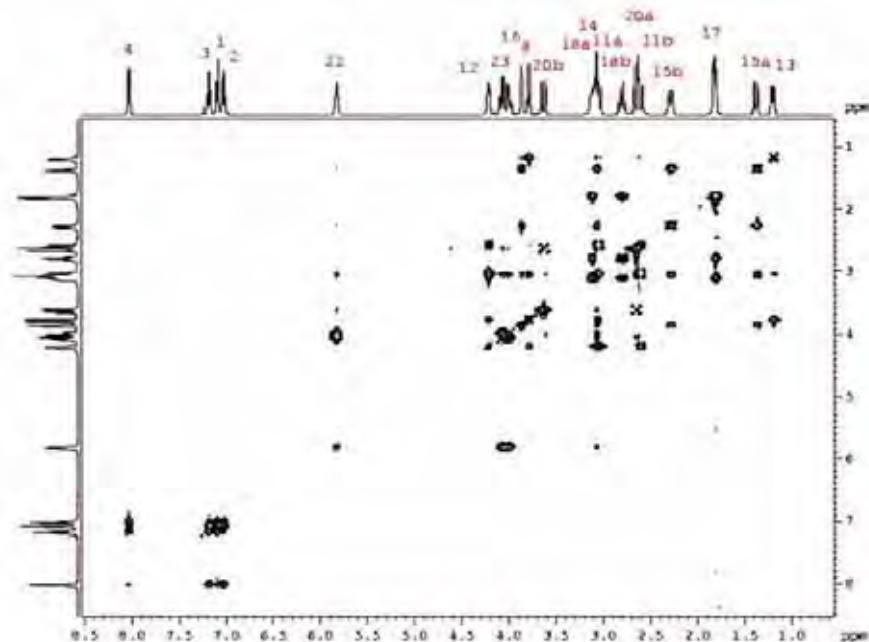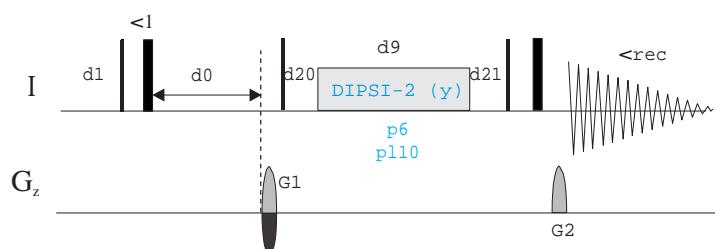


mlevgpph19

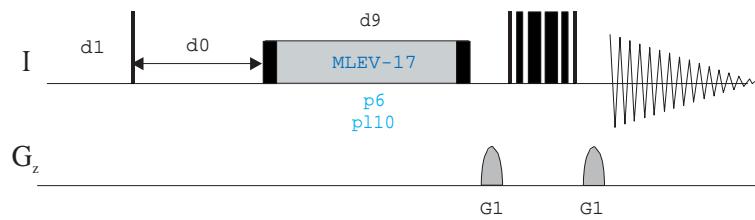


dipsi2gpph19

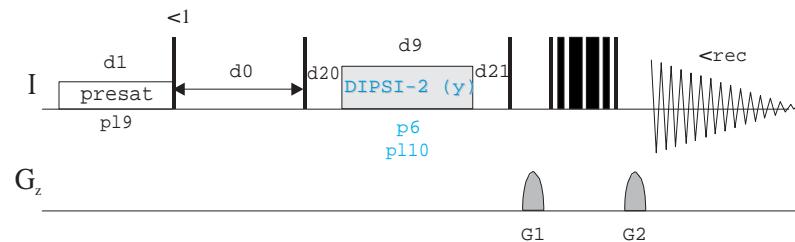


atocsygpph19

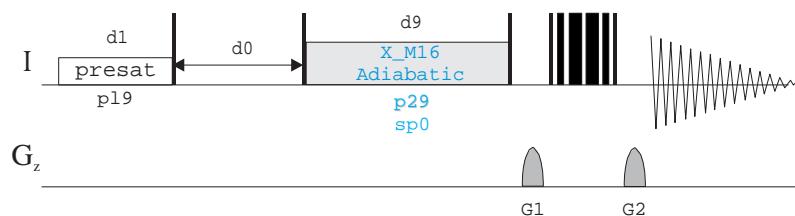


dipsi2etgpsi19

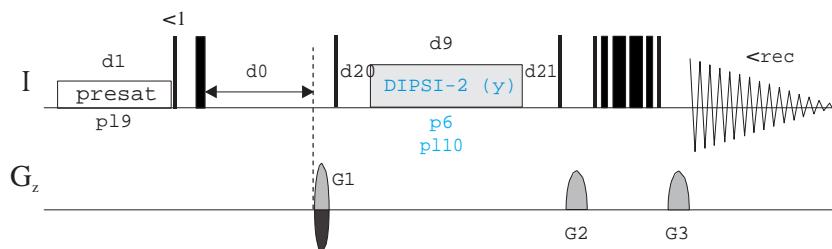


mlevgpphw5

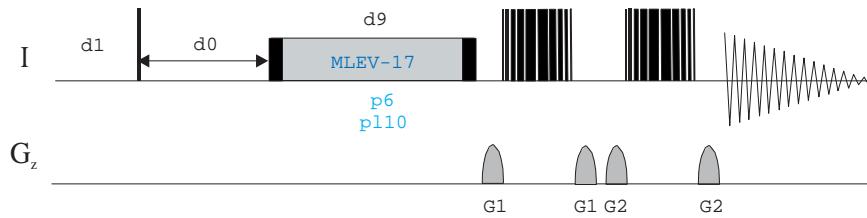

mlevesgpph

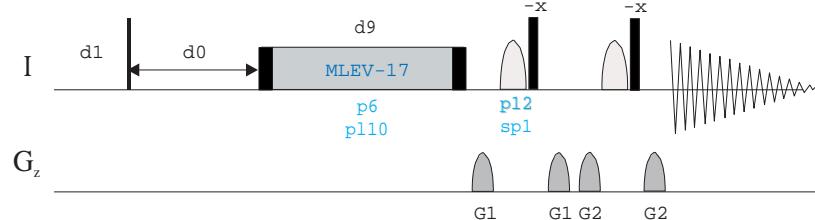

dipsi2esgpph

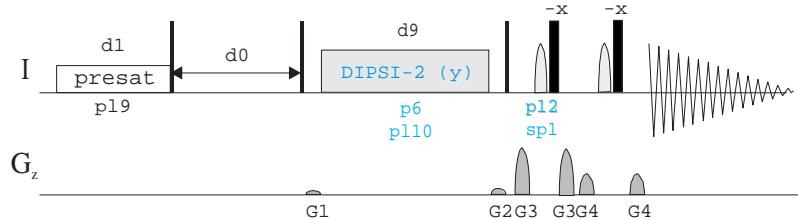

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D ROESY EXPERIMENTS

Phase-cycled:

Phase-sensitive 2D ROESY (roesyph | ROESYPHSW)
Phase-sensitive 2D ROESY using purge pulses before d1 (roesyphpp)
Phase-sensitive 2D T-ROESY (roesyph.2)
Phase-sensitive 2D T-ROESY using purge pulses before d1 (roesyphpp.2)
Phase-sensitive 2D ROESY with compensation (croesyph)
Phase-sensitive off-resonance 2D ROESY (troesyph)

Phase-cycled and solvent suppression:

Phase-sensitive 2D ROESY with presaturation (roesyphpr | ROESYPHPR)
Phase-sensitive 2D T-ROESY with presaturation (roesyphpr.2)
Phase-sensitive 2D ROESY with compensation and presaturation (croesyphpr)
Phase-sensitive off-resonance 2D ROESY with presaturation (troesyphpr)

Gradient-based:


Phase-sensitive ge-2D ROESY using echo-antiecho (roesyetgp)
Phase-sensitive ge-2D ROESY with T-ROESY using echo-antiecho (roesyetgp.2)











Gradient-based and solvent suppression:

Phase-sensitive 2D ROESY with WATERGATE using 3-9-19 (roesygpph19) Phase-sensitive 2D T-ROESY with WATERGATE using 3-9-19 (roesygpph19.2) Phase-sensitive 2D ROESY with excitation sculpting using 180 water-selective pulse (ES element) (roesyesgpph)


Related Experiments:

- Selective 1D ROESY Experiments
- 2D NOESY Experiments
- 2D HSQC-ROESY Experiments

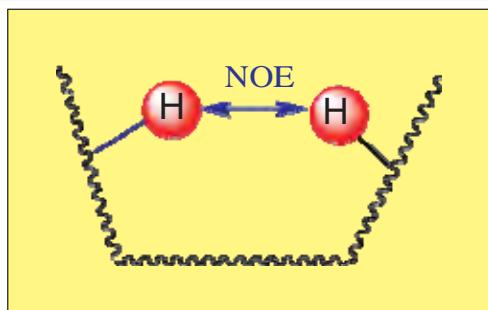


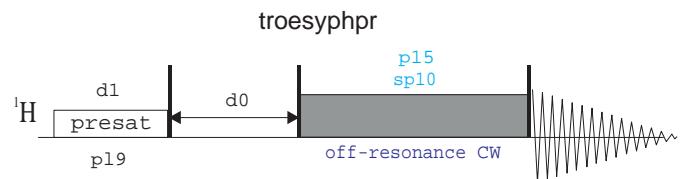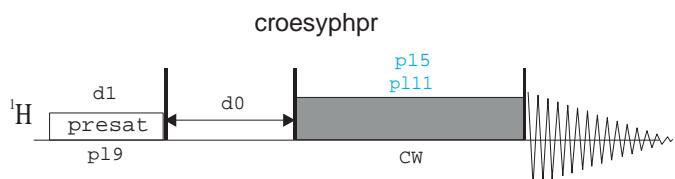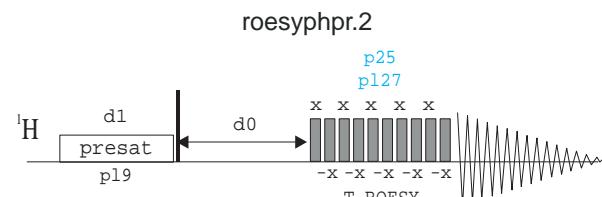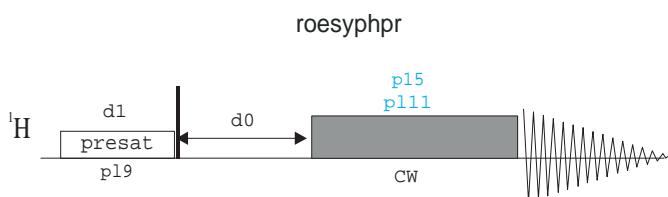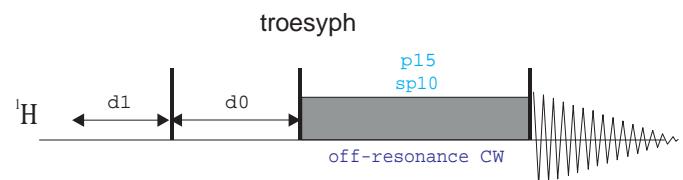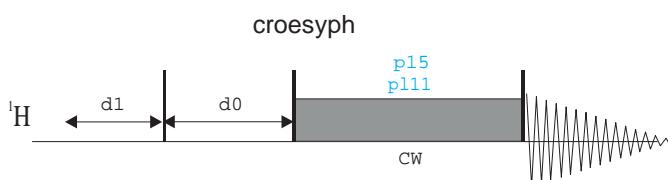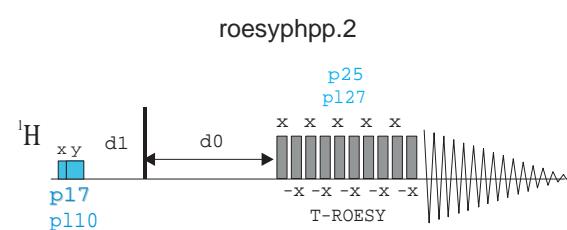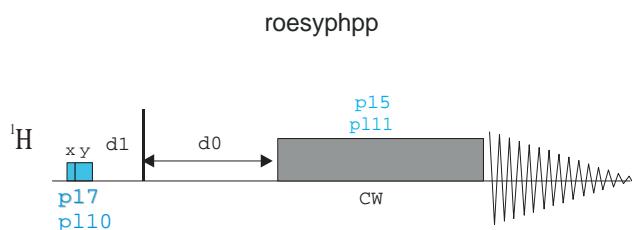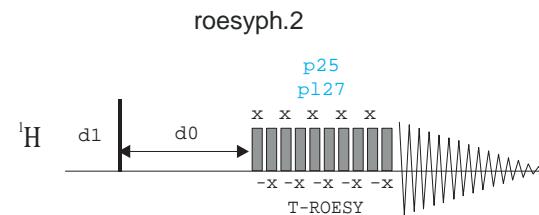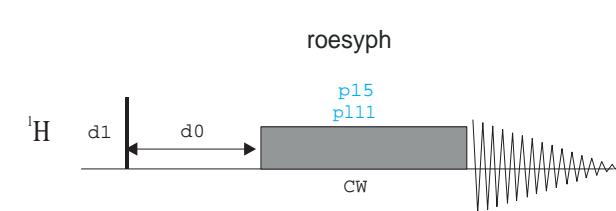


roesyetgp

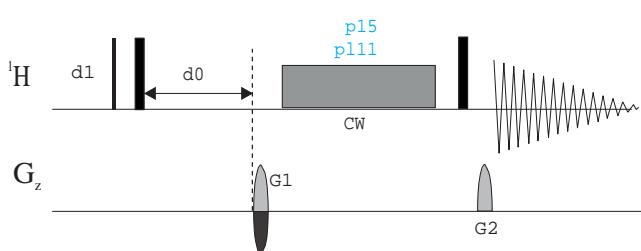


roesyetgp.2

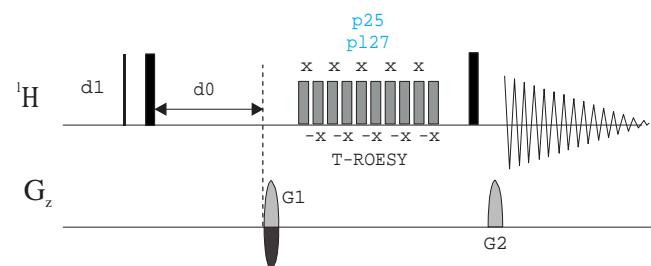


roesygpph19

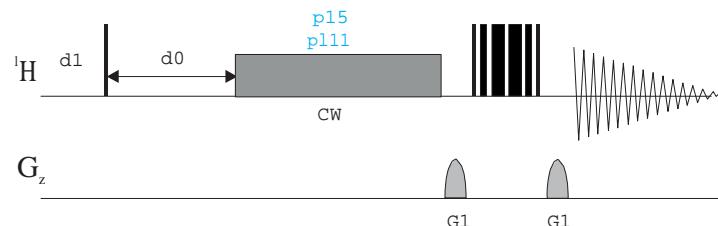

roesygpph19.2

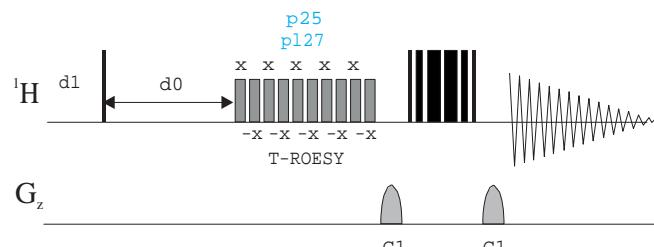

roesyesgpph

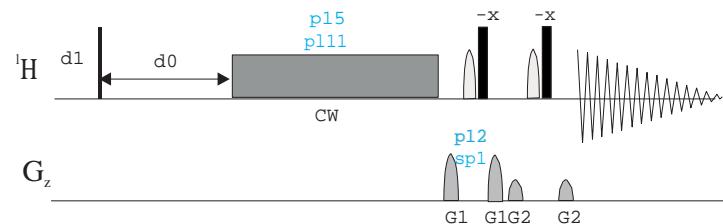

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D NOESY EXPERIMENTS

2D NOESY Experiments

1D Version:

1D NOESY with presaturation (noesypr1d)
1D NOESY with presaturation and spoil gradients (noesygppr1d)

Phase-cycled:

Phase-sensitive 2D NOESY (noesyph | NOESYPHSW)
Phase-sensitive 2D NOESY using purge pulses before d1 (noesyphpp)
Phase-sensitive 2D NOESY using random mixing time (noesyphrv)

Phase-cycled and solvent suppression:

Phase-sensitive 2D NOESY with presaturation (noesyphpr | H2OSUPNOESY)
Phase-sensitive 2D NOESY with presaturation using random mixing time (noesyphprrv)
Phase-sensitive 2D NOESY with 1-1 solvent suppression (noesyph11)

Gradient-based:

Phase-sensitive ge-2D NOESY (noesygpph)
Phase-sensitive ge-2D NOESY using purge pulses before d1 (noesygpphpp)
Phase-sensitive ge-2D NOESY with z-spoil (noesygpphzs)
Phase-sensitive ge-2D NOESY using echo-antiecho (noesyetgp)

Gradient-based and solvent suppression:

Phase-sensitive 2D NOESY using jump-and-return and optional ^{13}C and ^{15}N decoupling during acquisition (noesygpphjrrs)

Phase-sensitive 2D NOESY with WATERGATE: Using
3-9-19 (noesygpph19 | NOESYGPPH19SW) Using
water flip-back and 3-9-19 (noesyfpgpph19)
Using water flip-back and water-selective 90 pulses (noesyfpgpphwg)
Using water flip-back, 3-9-19 and PFG in t_1 (noesyfpgpphrs19)
Using water flip-back, water-selective 90 pulses and PFG in t_1 (noesyfpgpphrswg)

Phase-sensitive 2D NOESY with excitation sculpting:

Using W5 (noesygpphw5)
Using 180 water-selective pulse (ES element) (noesyesgpph)


Related Experiment:

Phase-sensitive 2D NOESY with RELAY and DQF (NOESY-RELAY experiment)
(noesydfphrl)



Related Experiments:

- Selective 1D NOESY
- 2D ROESY Experiments
- 2D HSQC-NOESY & 2D HMQC-NOESY
- 3D NOESY-HSQC & 3D HSQC-NOESY-HSQC
- 2D & 3D X-filtered NOESY experiments

noesypr1d




noesygppr1d

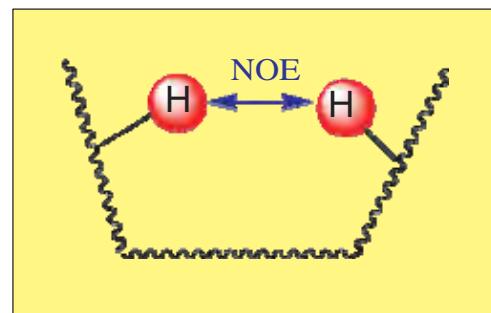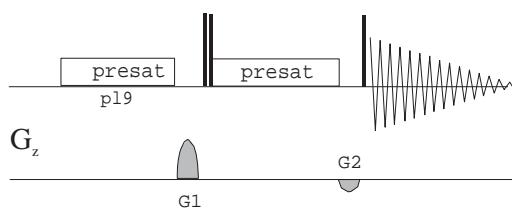


noesyph

noesyphrv




noesyphpp

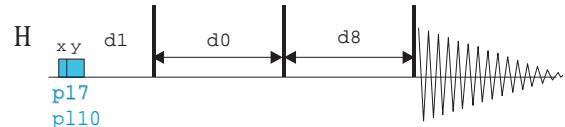


noesyphpr


noesyphprv

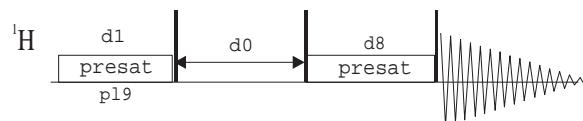


noesyph11

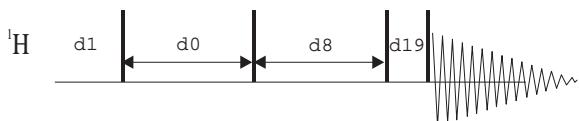


noesydfphrl

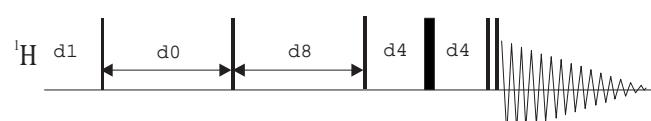


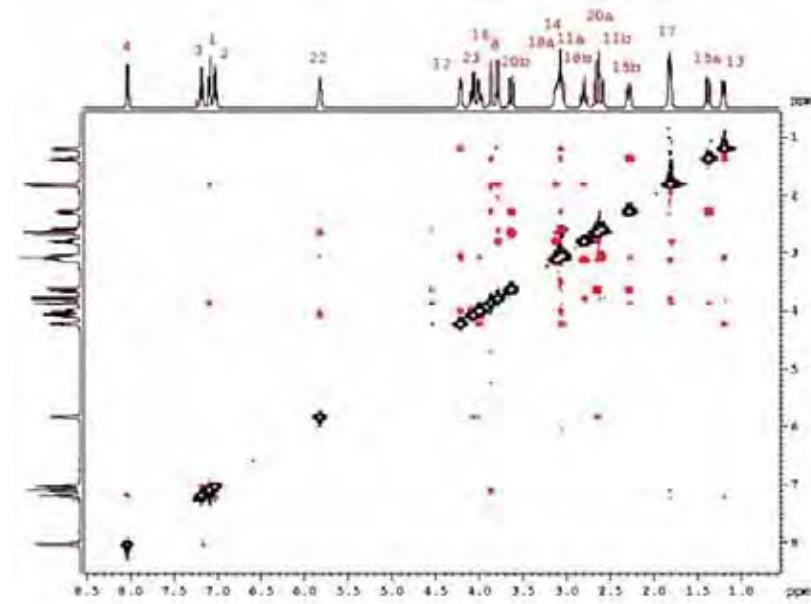


noesygpph

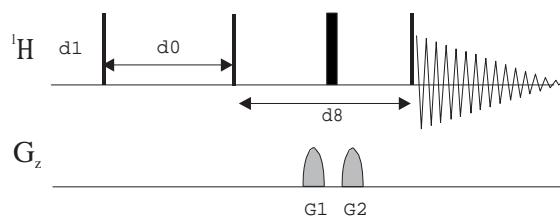


noesygpph_{pp}

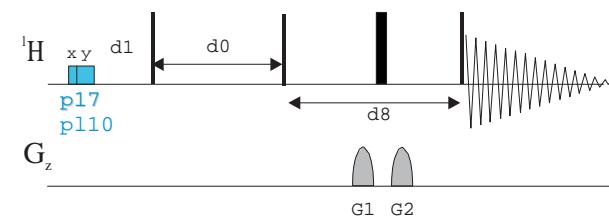


noesyetgp

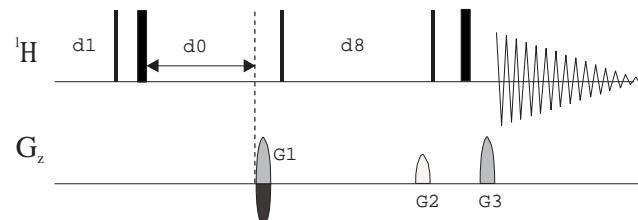


noesygpphzs

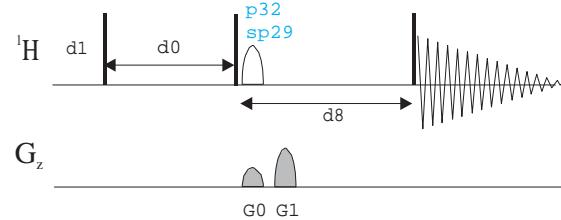


noesygpph19

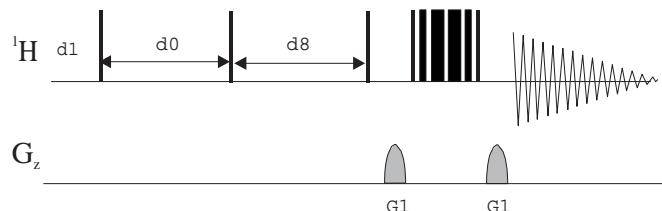


noesyfpgpph19

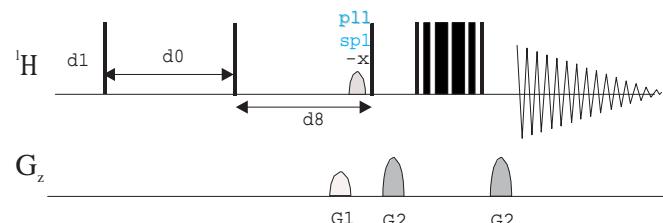


noesyfpgppphrs19

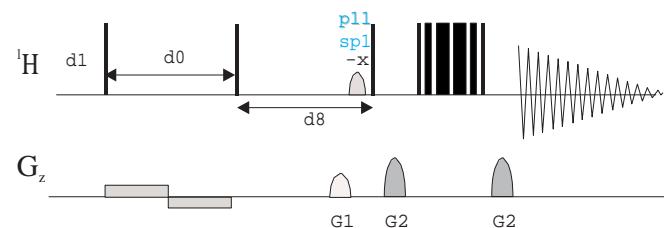


noesyfpgpphwg

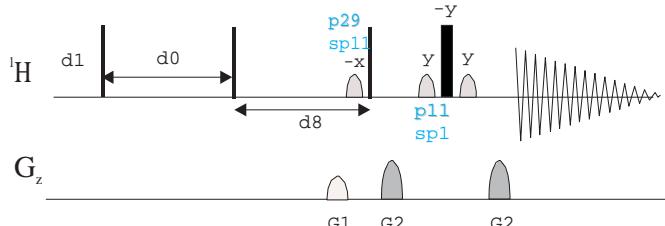


noesyfpgppphrswg

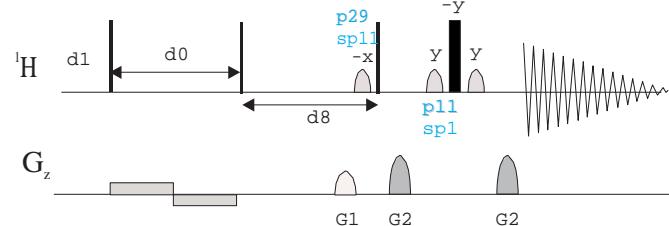


noesyegpph

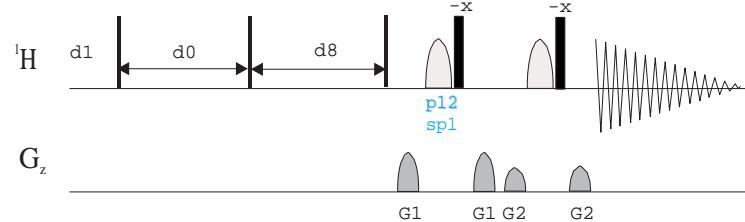

noesygpphw5

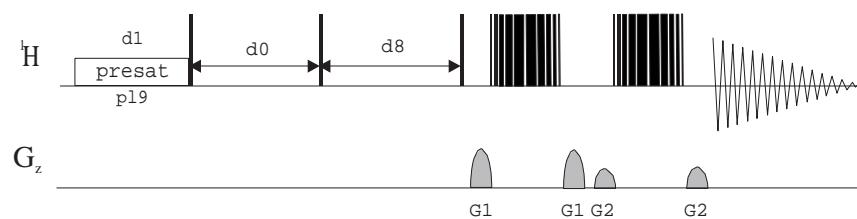

noesygpphjrrs

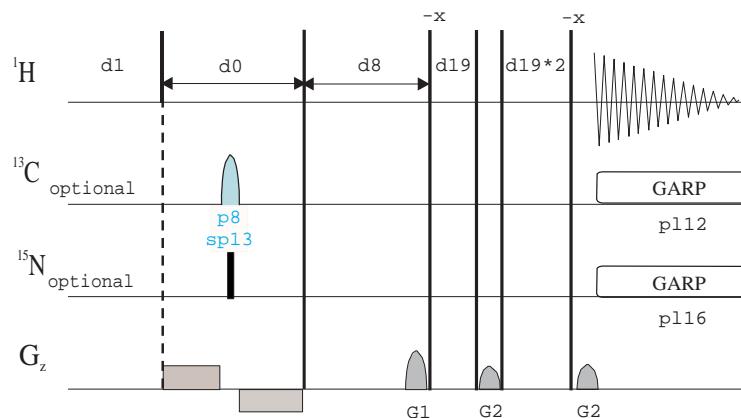

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

1D & 2D DOUBLE-QUANTUM
EXPERIMENTS

- **1D Double-Quantum (DQ)**

1D Double-Quantum experiments (dqs1d)
1D Multiple Quantum Filter (mqsgp1d | mqsgp1d2)

- **2D Phase-cycled Double-Quantum (DO)**

Magnitude-mode 2D Double-Quantum (DQ) (dqsqf)
Phase-sensitive Double-Quantum (DQ)(dqspf)
Phase-sensitive 2D Double-Quantum (DQ) with presaturation (dqspfpr)


- **2D Gradient-based Double-Quantum (DO)**

Phase-sensitive ge-2D Double-quantum using echo-antiecho, 45/135 degree conversion pulse for better sensitivity and remote peak minimisation (dqseagp135)
Phase-sensitive ge-2D Double-quantum using echo-antiecho (dqseagp90)


Related Experiments:

- 1D & 2D INADEQUATE


dqs1d

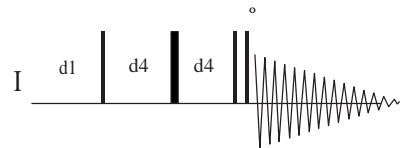


mqsgp1d

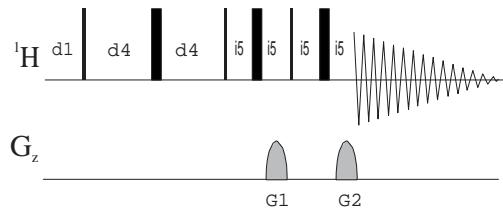


mqsgp1d2

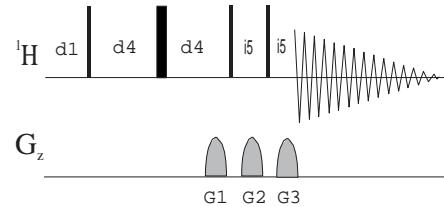


dqsph
dqsqf

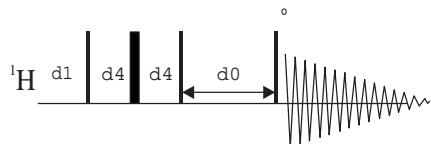


dqsphpr

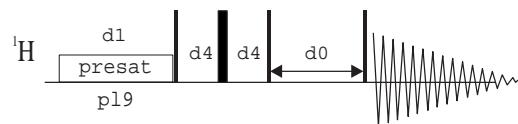

dqseagp90

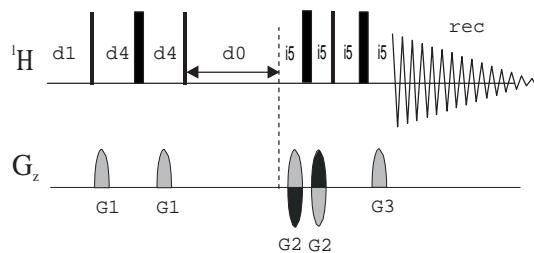

dqseagp135

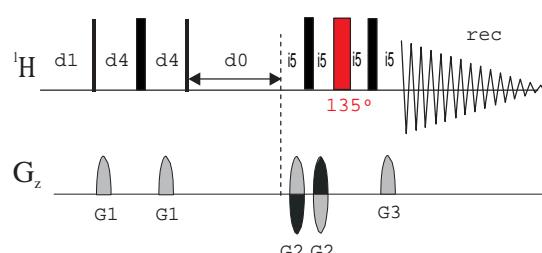

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D J-RESOLVED EXPERIMENTS

- **Classical:**


Magnitude-mode 2D J-Resolved (jresqf)
Magnitude-mode 2D J-Resolved with f2 decoupling (jresdcqf)


- **With solvent suppression:**

2D J-Resolved with presaturation (lcjresprqf)
2D J-Resolved with presaturation using shape pulse (lcjrespsqf)

Also see:

LC-NMR Experiments

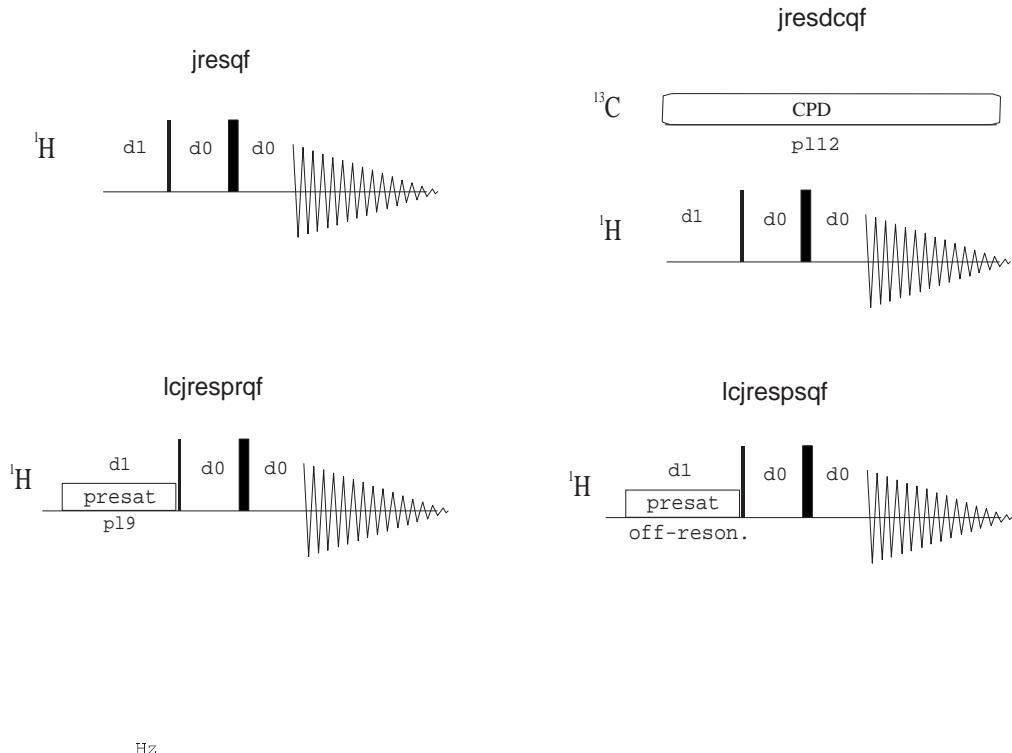

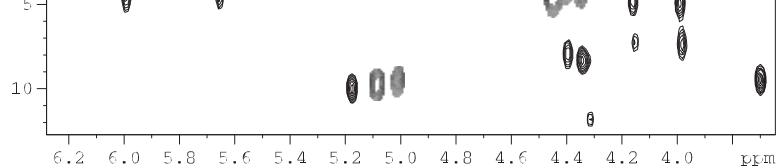




BRUKER
PULSE PROGRAM
CATALOGUE

NMRGuide


DECOUPLER PULSE CALIBRATION

Calibration of the 90 decoupler pulse (decp90, decp90f3)
Calibration of the 90 decoupler shaped pulse (decp90sp)


Calibration of the 180 decoupler pulse (dec180)
Calibration of the shaped 180 decoupler pulse (dec180sp)
Calibration of the 180 decoupler pulse using presaturation (dec180pr, dec180f3pr)

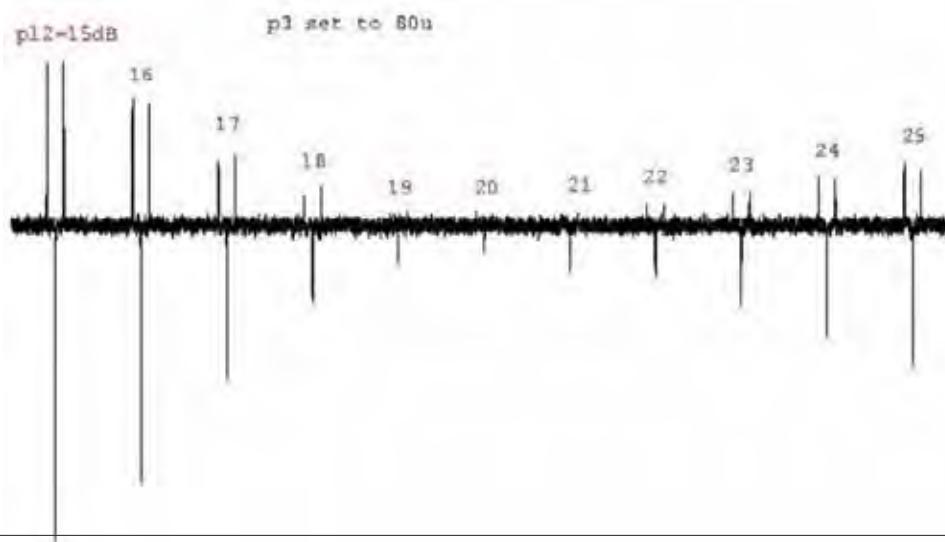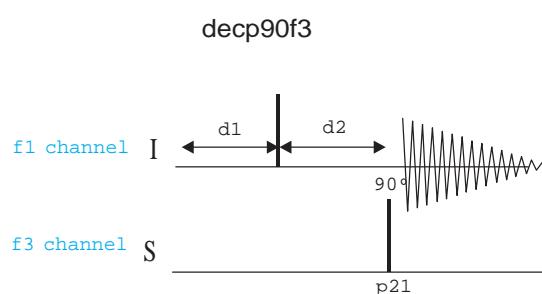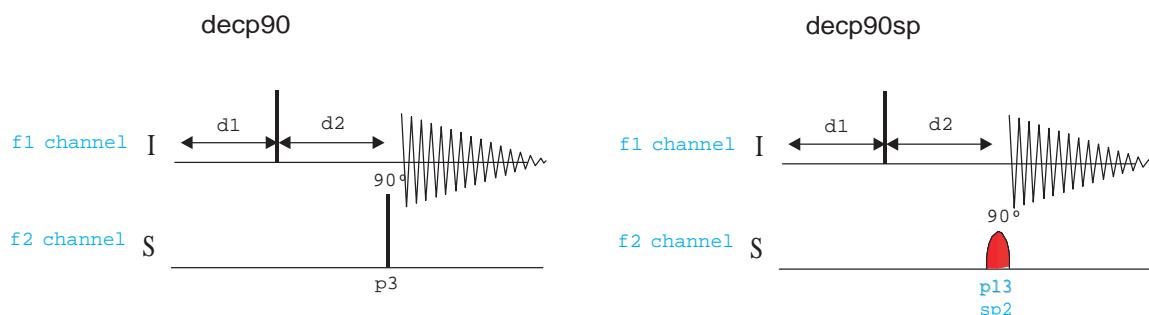


dec180

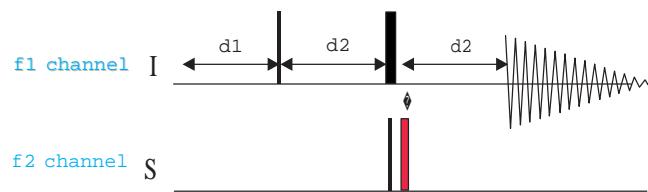


dec180sp

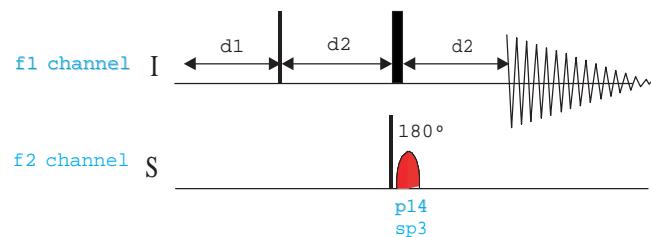

dec180pr

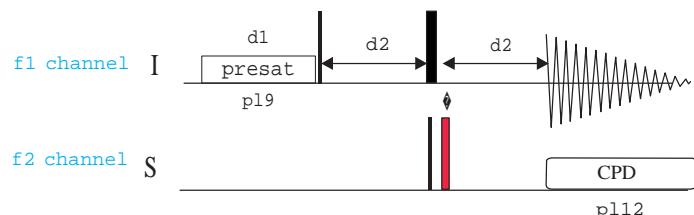

dec180f3pr

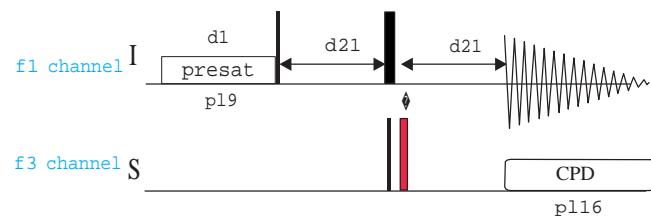

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

1D DEPT & INEPT EXPERIMENTS

- DEPT Experiments:

DEPT (dept)
DEPT-45 (dept45 | C13DEPT45)
DEPT-90 (dept90 | C13DEPT90)
DEPT-135 (dept135 | C13DEPT135)
DEPT-45 with adiabatic pulses (deptsp45 / deptsp)
DEPT-90 with adiabatic pulses (deptsp90)
DEPT-135 with adiabatic pulses (deptsp135)
DEPT with composite pulses (deptcp)
DEPT-45 with composite pulses (deptcp45)
DEPT-90 with composite pulses (deptcp90)
DEPT-135 with composite pulses (deptcp135)

DEPT without ^1H -decoupling (deptnd)
DEPT++ without ^1H -decoupling (deptppnd)

- INEPT Experiments:

INEPT without refocusing (ineptnd)
Refocused INEPT with decoupling (ineptrd)
Refocused INEPT with decoupling using adiabatic pulses (ineptrdsp)
INEPT+ without decoupling (ineptpnd)


Non-refocused ^1H -coupled ^{15}N spectrum using INEPT (ineptnd)
 ^1H -decoupled ^{15}N spectrum using INEPT (ineptrd | N15INEPT)
Refocused ^1H -coupled ^{15}N spectrum using INEPT+ (ineptpnd)







1D X-relayed H,X-COSY (ineptrl1 / ineptrl2)

- Other editing experiments:


Spin-Echo or SEFT (jmod)
Conventional APT (apt | C13APT)
APT with J-compensation (aptjc)

Quaternary-carbons with decoupling (quatd)
Quaternary-carbons without decoupling (quat)

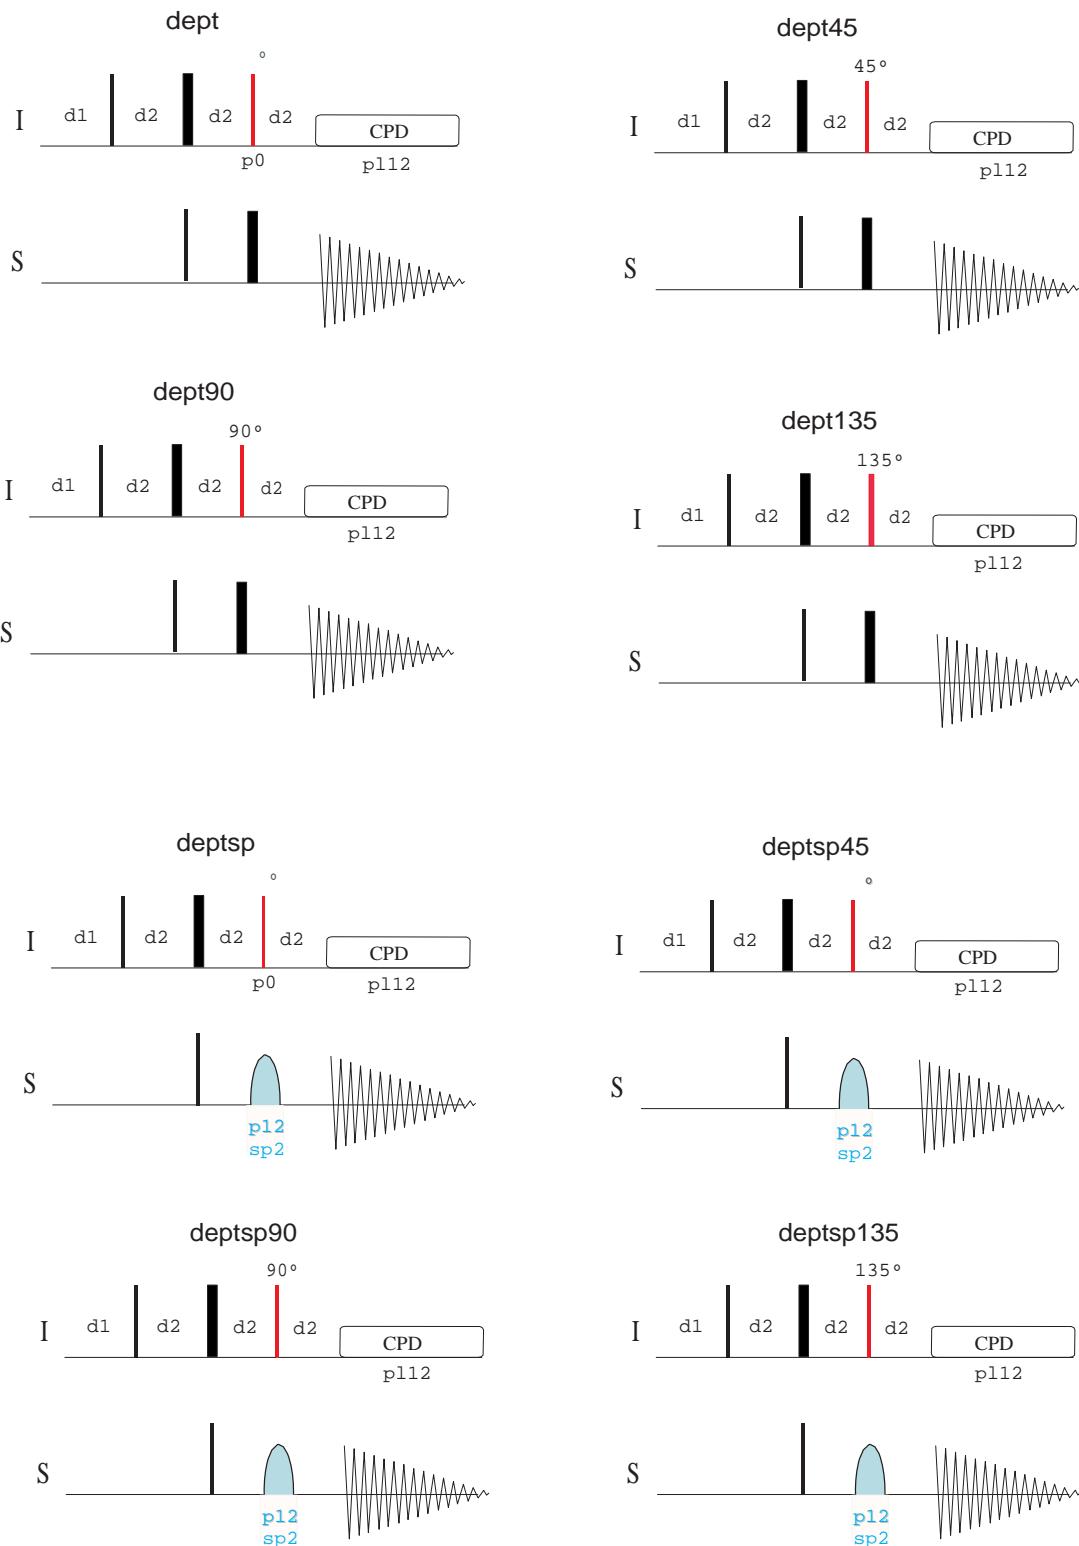


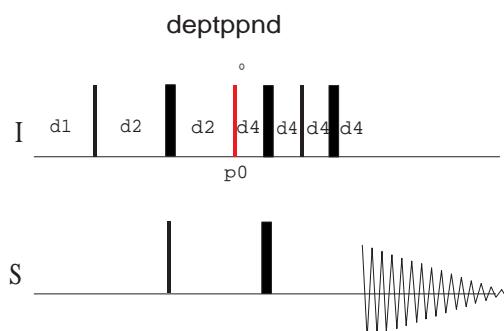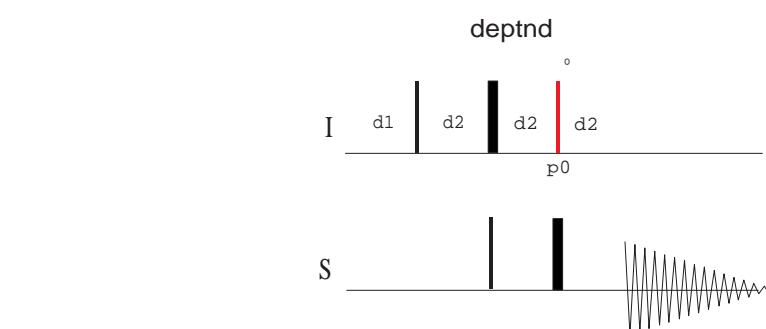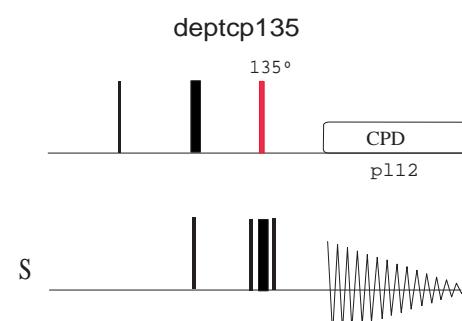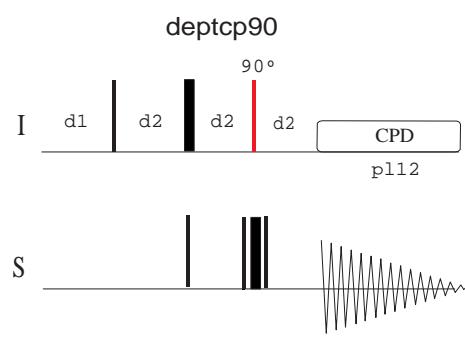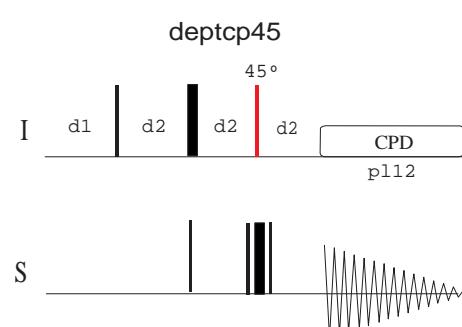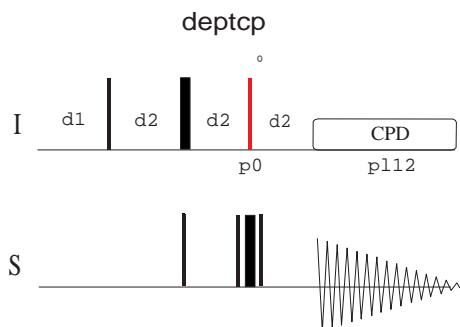



ineptnd





ineptrd

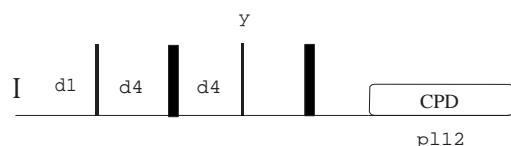


ineptrdsp

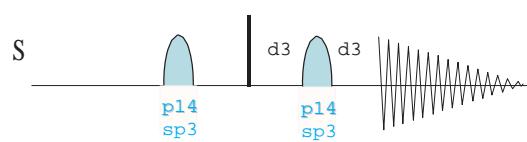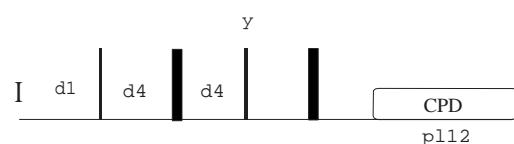


ineptpnd

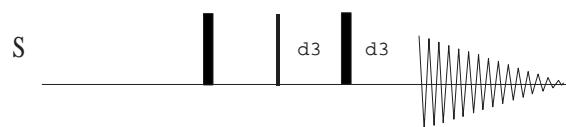


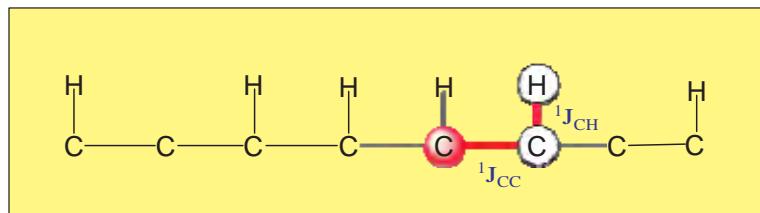


ineptrl1

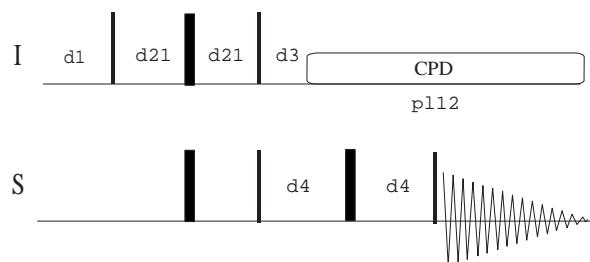


ineptrl2

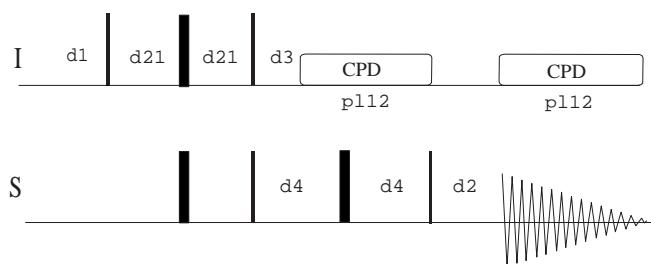


jmod

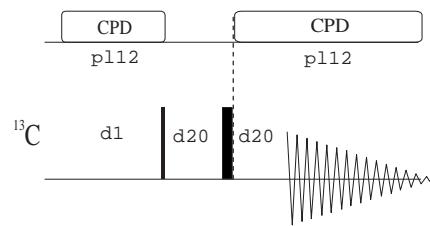


apt

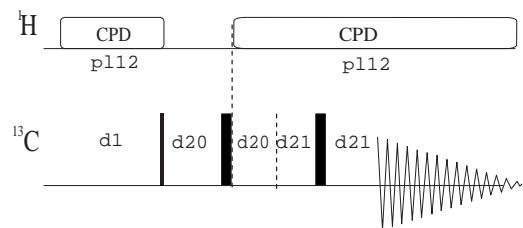


aptjc

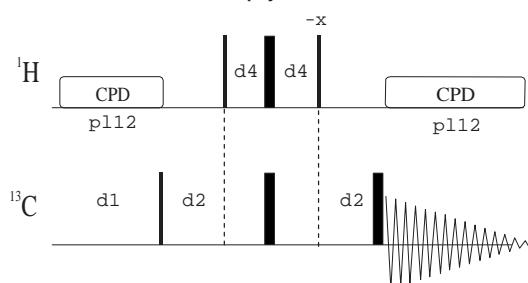


quat

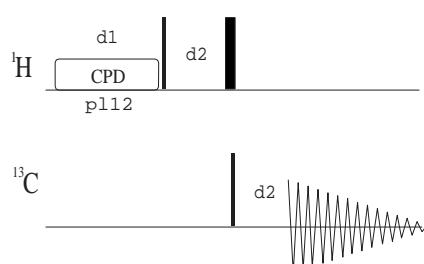

quatd

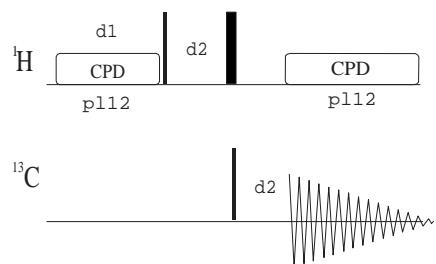

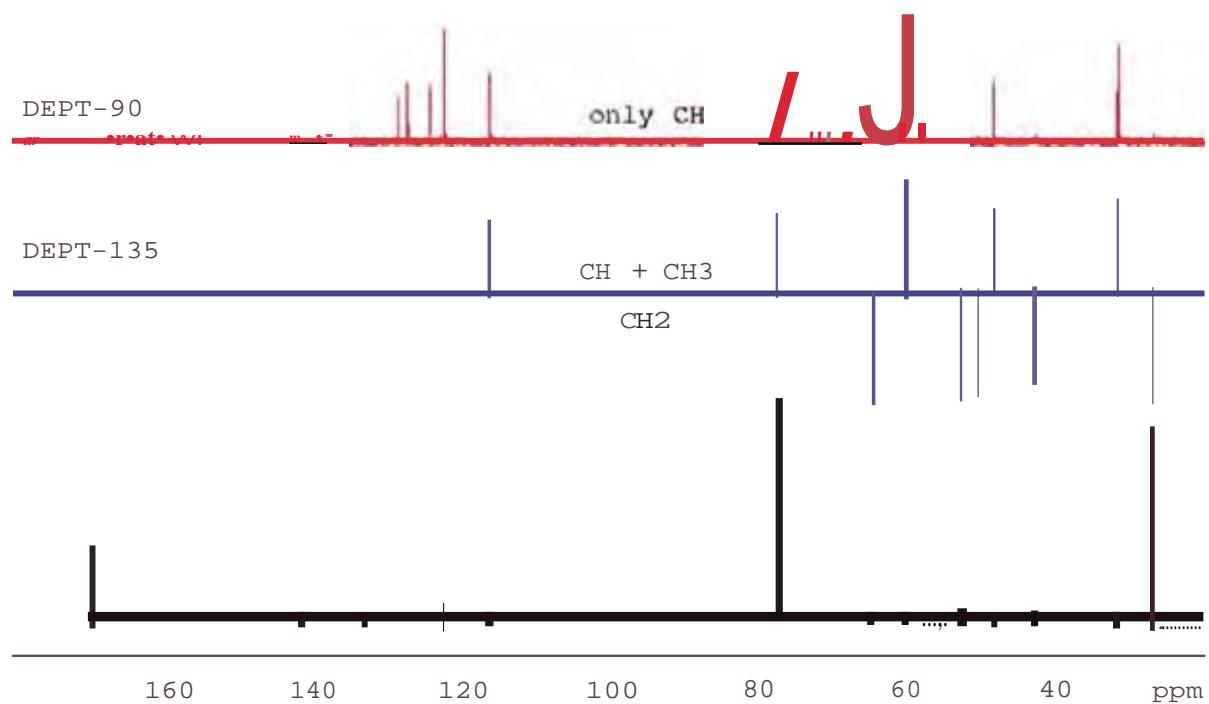

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D X-DETECTED HETCOR
EXPERIMENTS

- INEPT-Based HETCOR

- Magnitude-mode 2D HETCOR (hxcoqf | HCCOSW)
- Magnitude-mode 2D HETCOR with 2H-decoupling (hxcoqf2h)
- Magnitude-mode 2D HETCOR using composite pulses (hxcocpqf)
- Magnitude-mode 2D HETCOR with ^1H - ^1H decoupling in F1 using BIRD (hxcoiqf)
- Magnitude-mode 2D HETCOR with ^1H - ^1H decoupling in F1 using BIRD and composite pulses (hxcoicpqf)
- Magnitude-mode 2D HETCOR with refocusing of chemical shifts (hxinepqf)
- Phase-sensitive 2D HETCOR with refocusing of chemical shifts (hxinepph)

- DEPT-based HETCOR

- Magnitude-mode DEPT-based 2D HETCOR (hxdeptqf)
- Phase-sensitive DEPT-based 2D HETCOR (hxdeptph)
- Magnitude-mode DEPT-based 2D HETCOR with ^1H - ^1H decoupling in F1 using BIRD (hxdeptbiqf)
- Phase-sensitive DEPT-based 2D HETCOR with ^1H - ^1H decoupling in F1 using BIRD (hxdeptbiph)
- Phase-sensitive DEPT-based TOCSY-HETCOR experiment (hxdeptmlph)

- 2D H-relayed HETCOR experiment



- Magnitude-mode 2D H-relayed HETCOR (hhxcoqf / hhxcoqf.2)


- 2D X-relayed HETCOR experiment

- Magnitude-mode 2D X-relayed HETCOR (hxxcoqf)


Related Experiments:

- 2D HMQC
- 2D HSQC

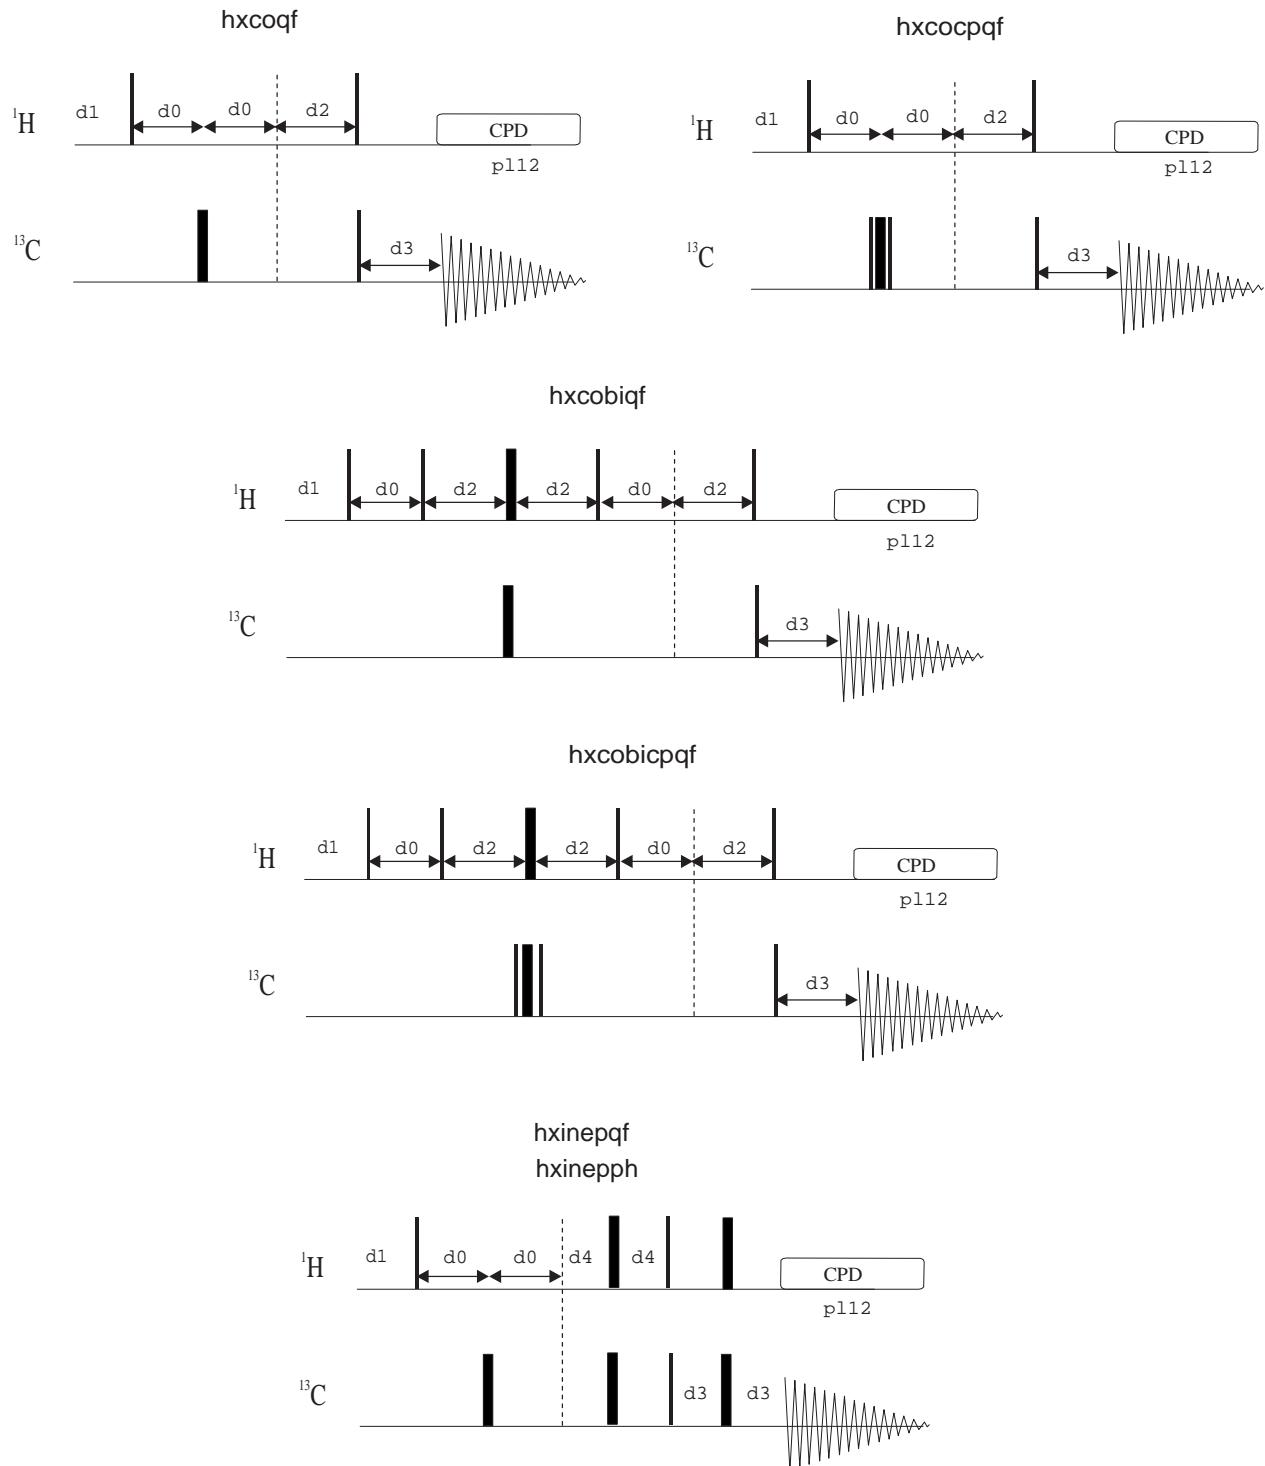
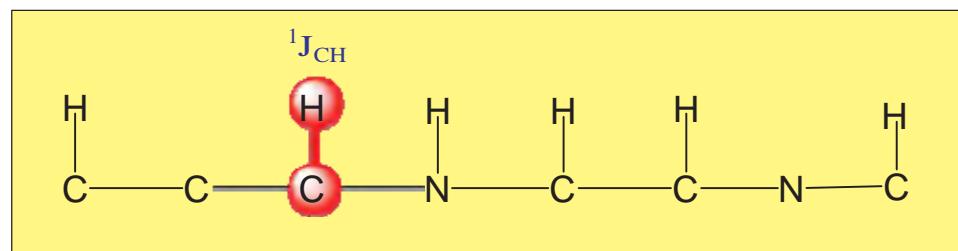


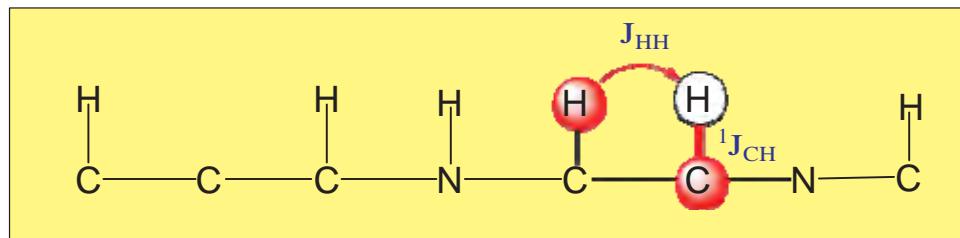


hhxcoqf





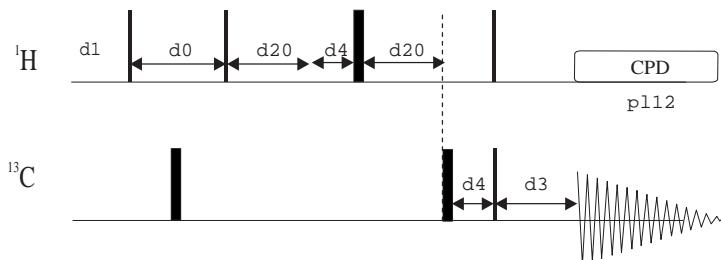


hhxcoqf.2

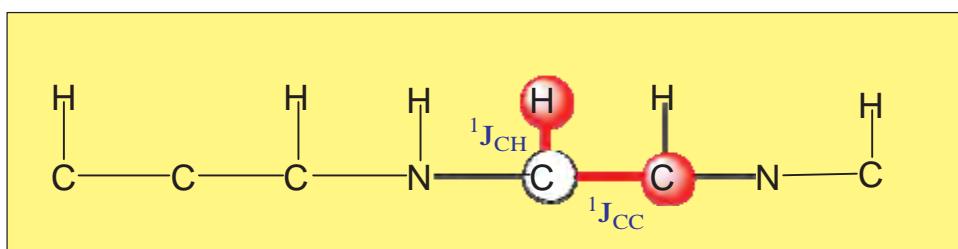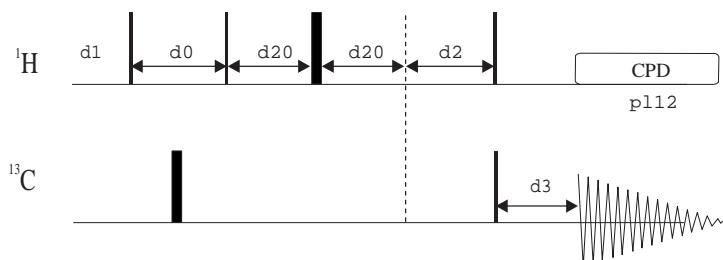

hxxcoqf

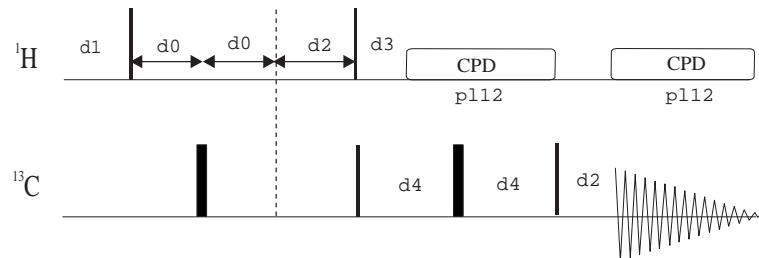

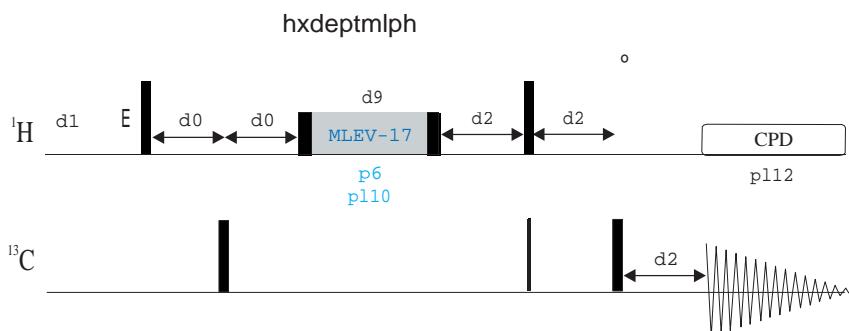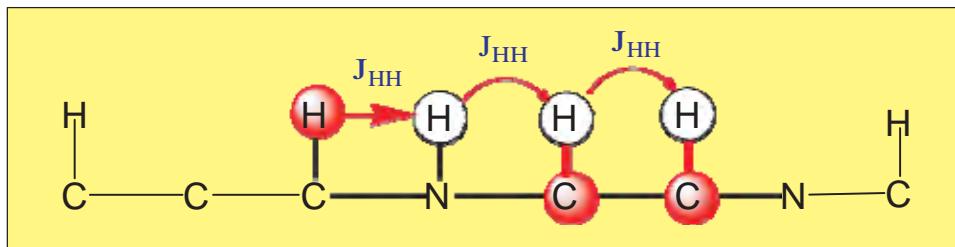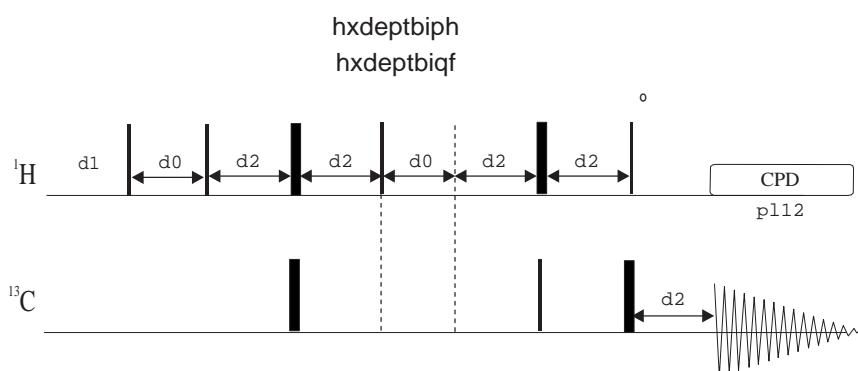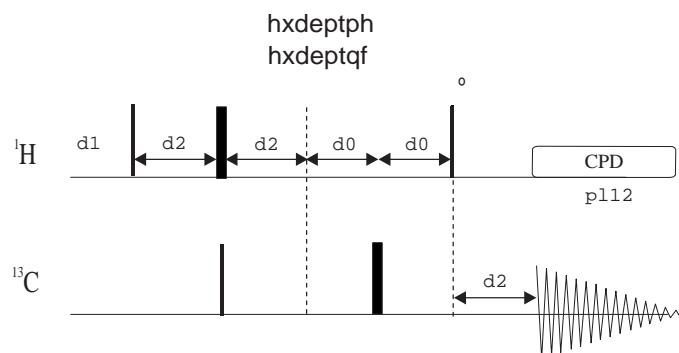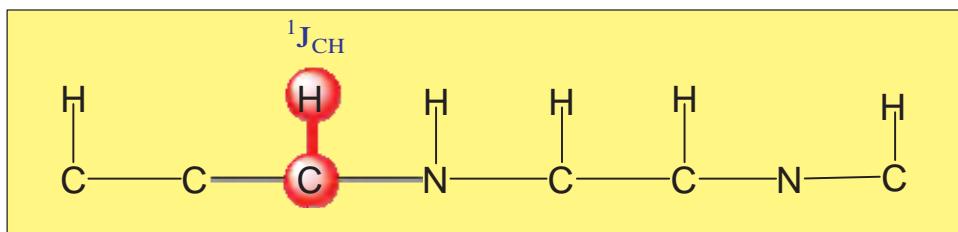

BRUKER PULSE PROGRAM CATALOGUE


NMRGuide

2D COLOC EXPERIMENT


- Magnitude-mode 2D COLOC (colocqf | HCCOLOCSW)

Related Experiments:

- 2D HETCOR
- 2D HMBC

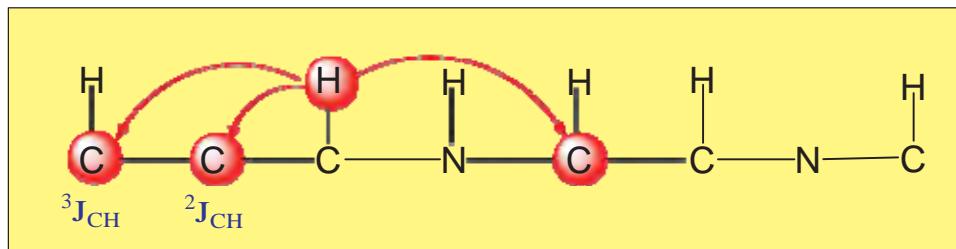

colocqf

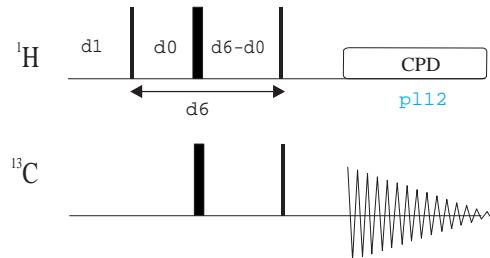


BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HETERONUCLEAR
J-RESOLVED EXPERIMENT

Magnitude-mode 2D Heteronuclear J-Resolved (hjresqf)

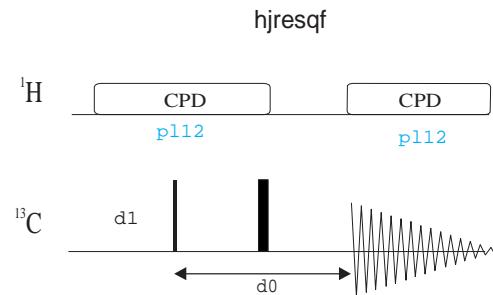




BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HOESY EXPERIMENTS

Magnitude-mode 2D ^1H - ^{13}C HOESY(hoesyqfrv)
Phase-sensitive 2D ^1H -X HOESY (hoesyph)

Also see 19F experiments
(hoesyfhqfqnrv)

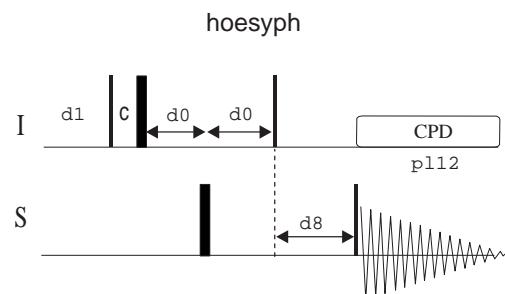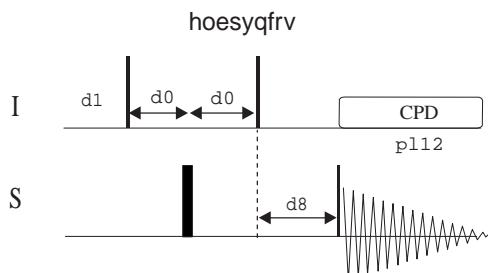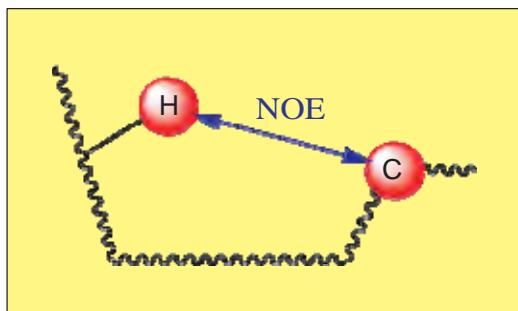

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

1D & 2D INADEQUATE
EXPERIMENTS


- **1D INADEQUATE**

1D INADEQUATE without refocusing (inad1d)
1D INADEQUATE using composite pulses (inadcp1d)
1D INADEQUATE with refocusing (inadr1d)
1D INADEQUATE using initial INEPT (inepin)


- **2D INADEQUATE**

Magnitude-mode 2D INADEQUATE (inadqf/ inadqf.2 | INAD)
Phase sensitive 2D INADEQUATE(inadph)
Magnitude-mode symmetric 2D INADEQUATE(inadqfsy)


Also see 1D & 2D DQ Experiments

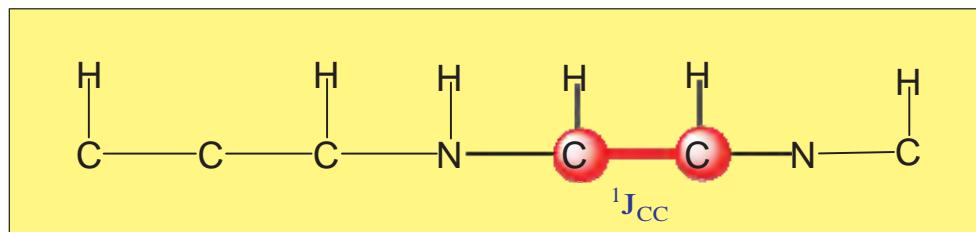



inad1d

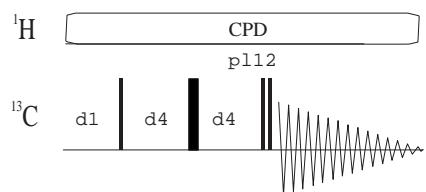


inadrd1d

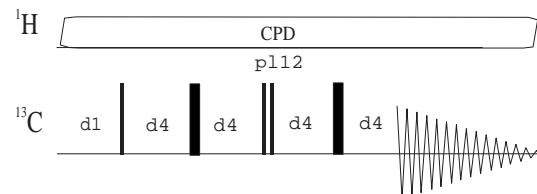


inadcp1d

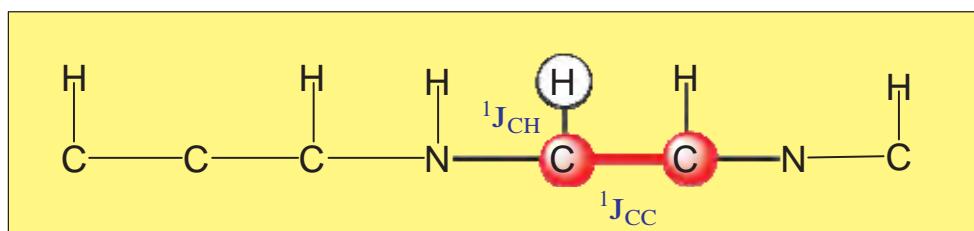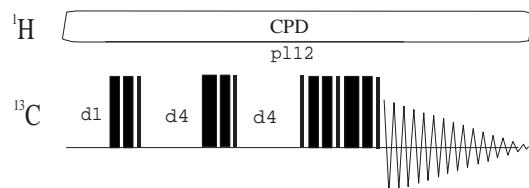


inepin

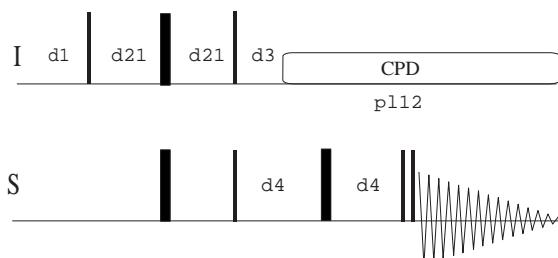


Also see inept1l

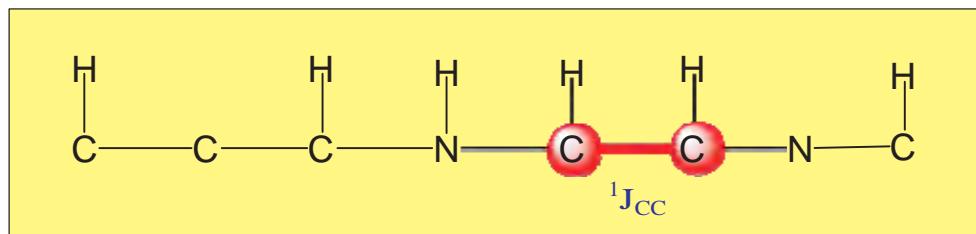

inadqf.2
inadph
inadqf

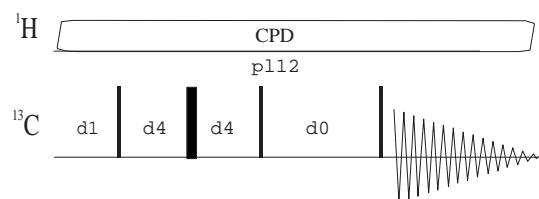

inadqfsy

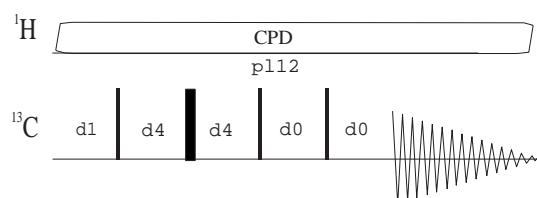

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

1D INVERSE EXPERIMENTS

- **Phase-Cycled:**

1D inverse DEPT with refocusing and no decoupling (ideptnd)
1D inverse INEPT without refocusing and without decoupling (iineptnd)
1D inverse INEPT with refocusing and decoupling (iineptrd)


1D HMQC with refocusing but not decoupling (hmqcndrd1d | HMQC1D)
1D HMQC without refocusing and without decoupling (inv3nd1d/ hmqcnd1d)
1D HMQC with refocusing and decoupling (hmqcrd1d)
1D HMQC using BIRD without refocusing and without decoupling (hmqcbind1d)
1D HMQC using BIRD with refocusing and without decoupling (hmqcbindrd1d)
1D HMQC using BIRD with refocusing and decoupling (hmqcbird1d)

1D DEPT-HMQC with refocusing and decoupling (indecord1d)
1D DEPT-HMQC using BIRD with refocusing and decoupling (indecobird1d)


- **Gradient-based:**

ge-1D HMQC with refocusing but not decoupling (hmqcgpnd1d)
ge-1D HSQC with refocusing and no decoupling (hsqcgpnd1d)


Any 2D or 3D pulse sequence can be used for 1D acquisition (mc commands)

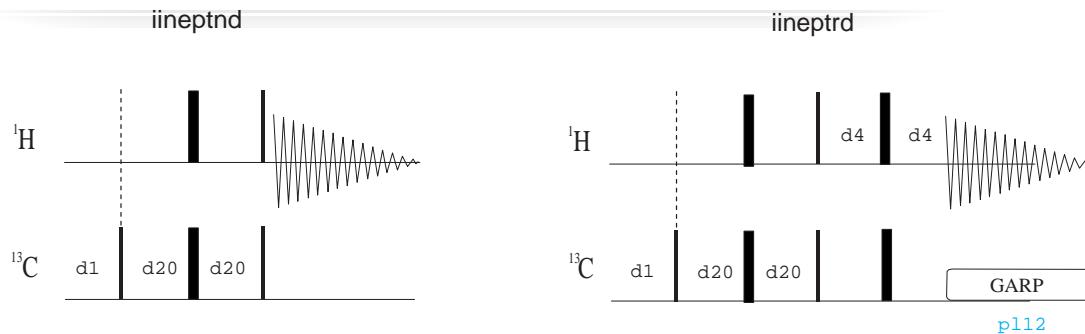


p112

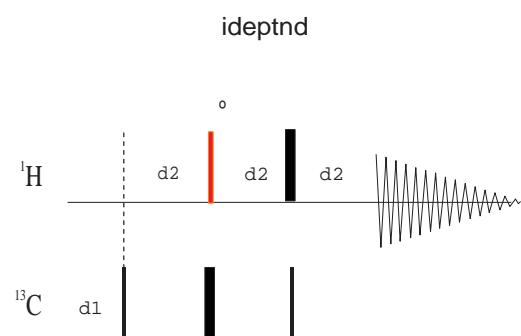


hmqcnd1d

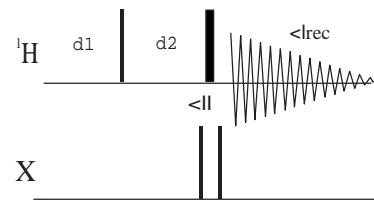


hmqcndrd1d

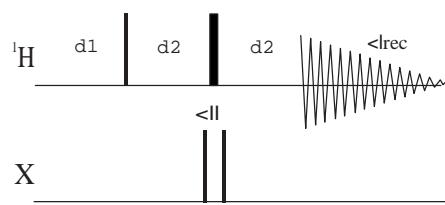


hmqr1d

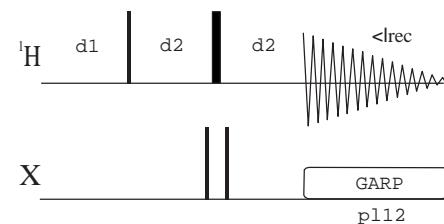


hmqcbind1d

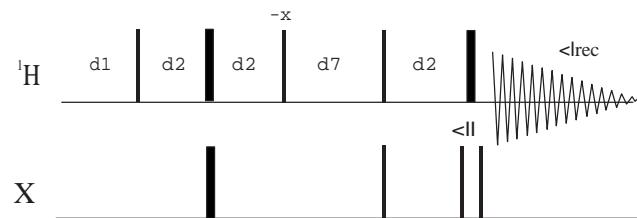


hmqcbindrd1d

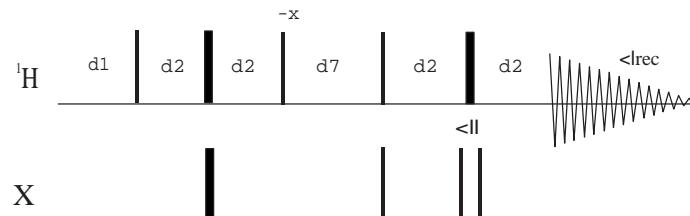


hmqcbird1d

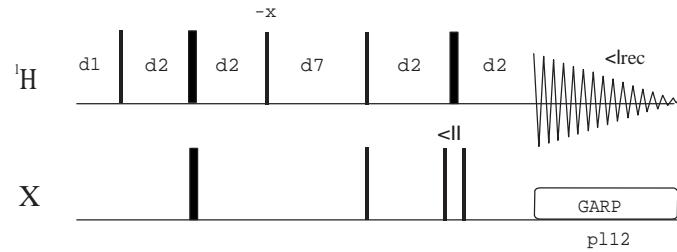


indecord1d

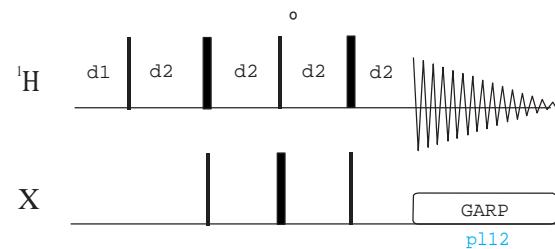


indecobird1d

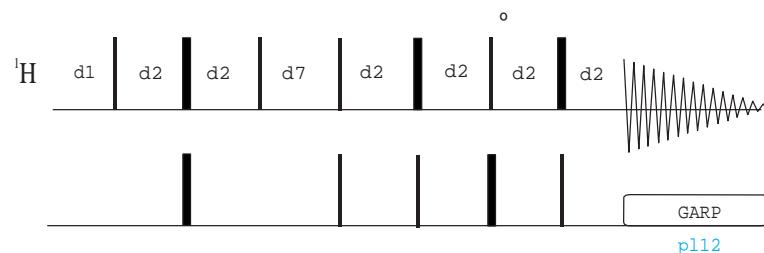

hmqcgpnd1d

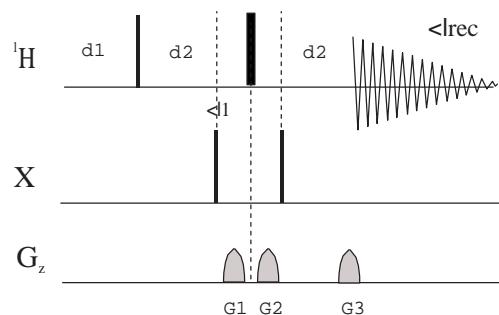

hsqcgpnd1d

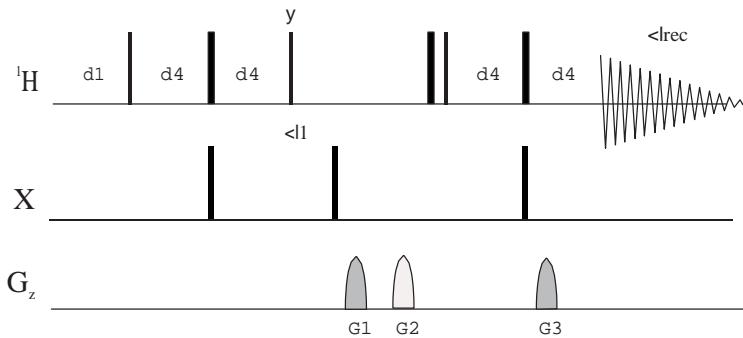

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HMQC EXPERIMENTS

Phase-cycled:

Magnitude-mode 2D HMQC (hmqcwf | HMQC)
Magnitude-mode 2D HMQC without decoupling (hmqcndwf)
Magnitude-mode 2D HMQC using BIRD (hmqcbwf | HMQCB)
Magnitude-mode 2D HMQC using BIRD without decoupling (hmqcbndwf)
Phase-sensitive 2D HMQC (hmqcpwf | HMQCPH)
Phase-sensitive 2D HMQC without decoupling (hmqcndwf)
Phase-sensitive 2D HMQC using BIRD (hmqcbiph | HMQCBIPH)
Phase-sensitive 2D HMQC using BIRD without decoupling (hmqcbndwf)

Phase-cycled and solvent suppression

From f2 channel:

Phase-sensitive 2D HMQC with presaturation (hmqcpwfpr | HMQCPHPR)
Phase-sensitive 2D HMQC using BIRD and presaturation (hmqcbiphpr) /
hmqcbiphpr2)
Phase-sensitive 2D HMQC with 1-1 water suppression (hmqcpwf11)

From f3 channel:

Phase-sensitive 2D ^1H - ^{15}N HMQC (hmqcf3ph)
Phase-sensitive 2D ^1H - ^{15}N HMQC using presaturation (hmqcf3phpr)
Phase-sensitive 2D ^1H - ^{15}N HMQC using BIRD (hmqcbif3ph)
Phase-sensitive 2D ^1H - ^{15}N HMQC using decoupling in a third f2 channel
(hmqcfbph)

Gradient-based:

From f2 channel:






Magnitude-mode ge-2D HMQC (hmqcgpwf | HMQCGP)
Phase-sensitive ge-2D HMQC using z-filter (hmqcgpph)
Phase-sensitive ge-2D HMQC using echo-antiecho (hmqcetgp)
Phase-sensitive ge-2D HMQC using echo-antiecho with adiabatic refocusing (hmqcetgp.2)
Phase-sensitive ge-2D HMQC using PEP (hmqcetgpsi)
Phase-sensitive ge-2D HMQC using PEP and shorter overall timing (hmqcetgpsi.2)

From f3 channel:


Phase-sensitive ge-2D ^1H - ^{15}N HMQC using echo-antiecho (hmqcetf3gp)
Phase-sensitive ge-2D ^1H - ^{15}N HMQC using PEP (hmqcetf3gpsi)
Phase-sensitive ge-2D ^1H - ^{15}N HMQC using PEP and shorter overall timing(hmqcetf3gpsi.2)

Gradient-based and solvent suppression


Phase-sensitive ge-2D ^1H - ^{15}N HMQC using WATERGATE (3-9-19)
(hmqcf3gpph19)

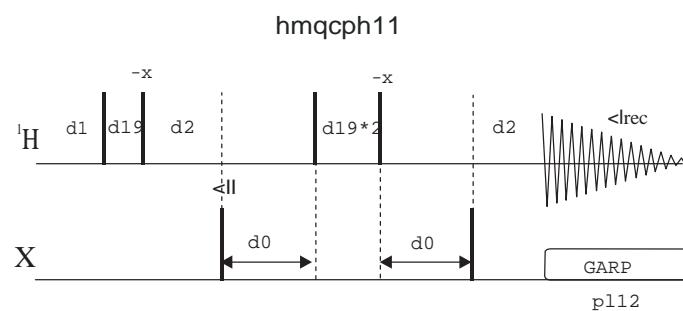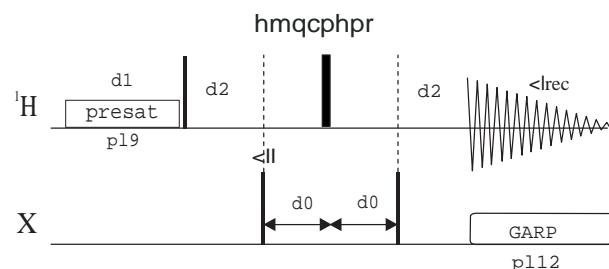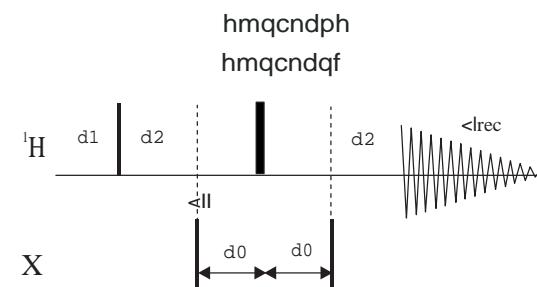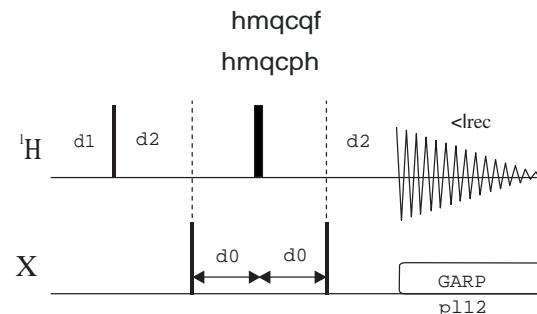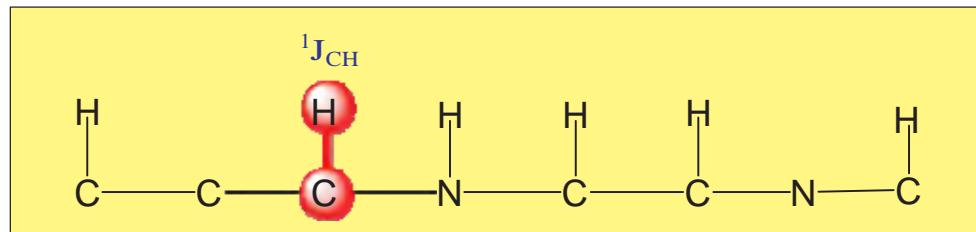


hmqcbiph
hmqcbiqf

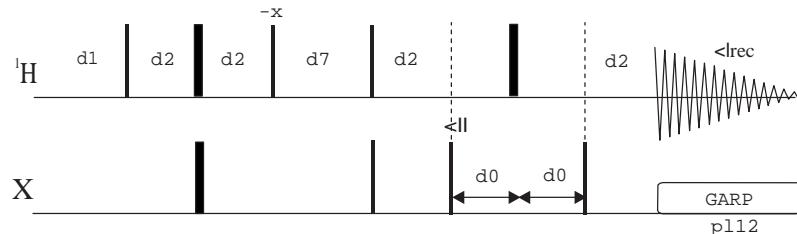


hmqcbindph
hmqcbindqf

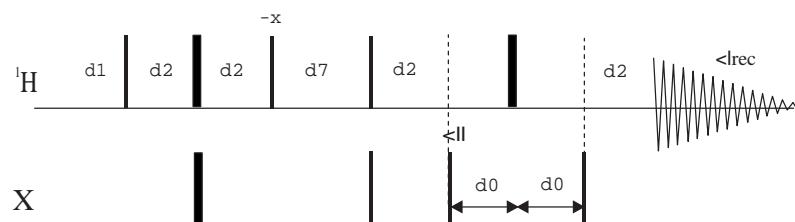


hmqcbiphpr

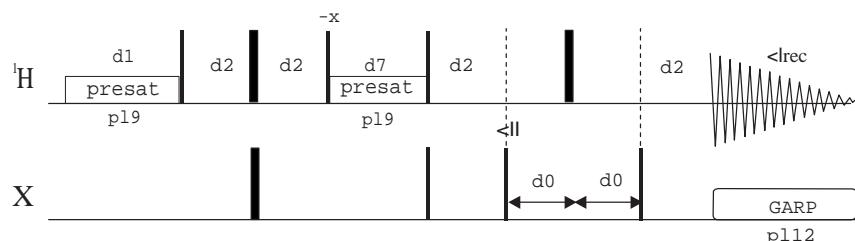


hmqcbiphpr2

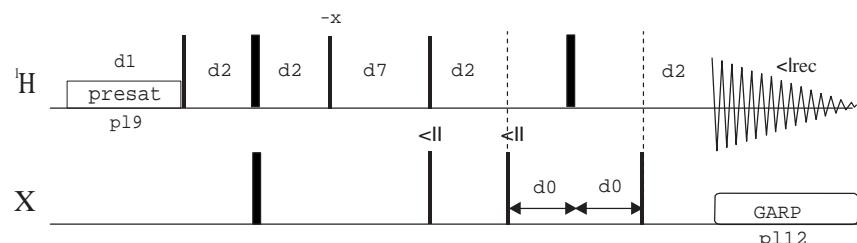


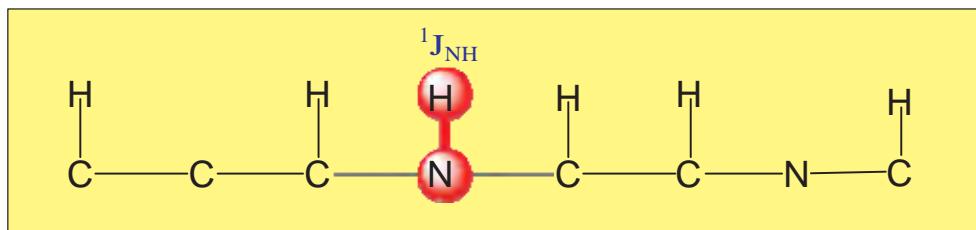


hmqcf3ph

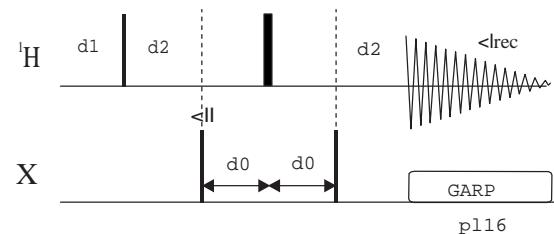


hmqcf3phpr

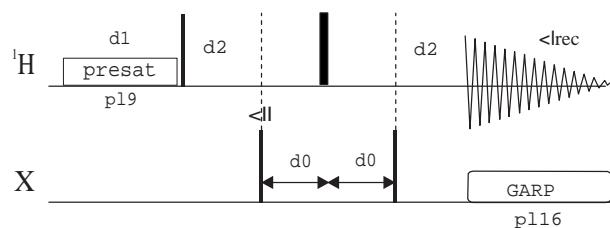


hmqcbif3ph

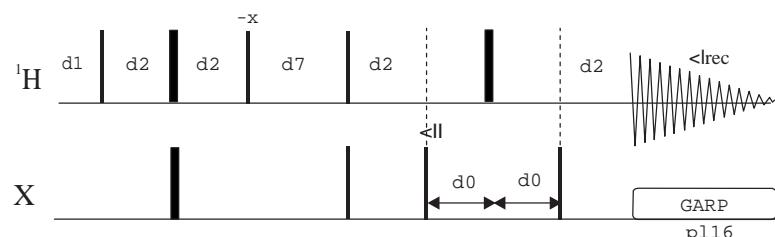


hmqcfbph

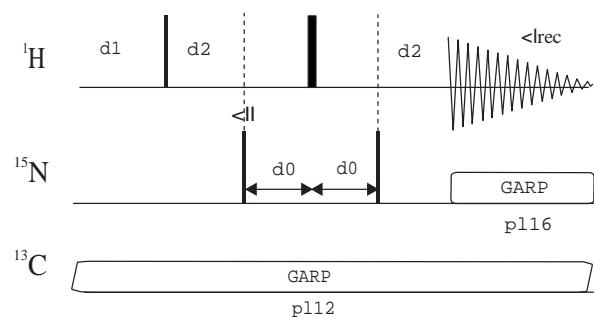


hmqcgpqf

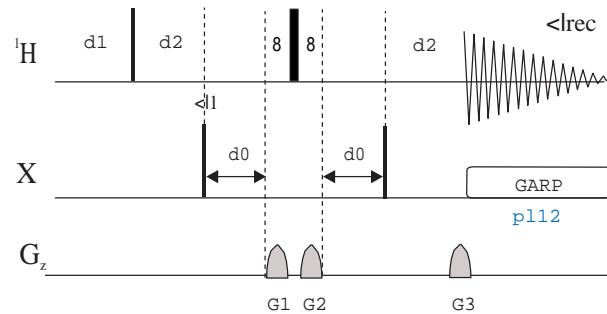


hmqcgpjh

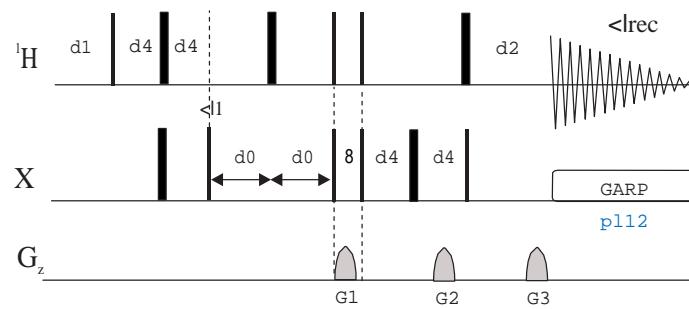


hmqcf3gpph19

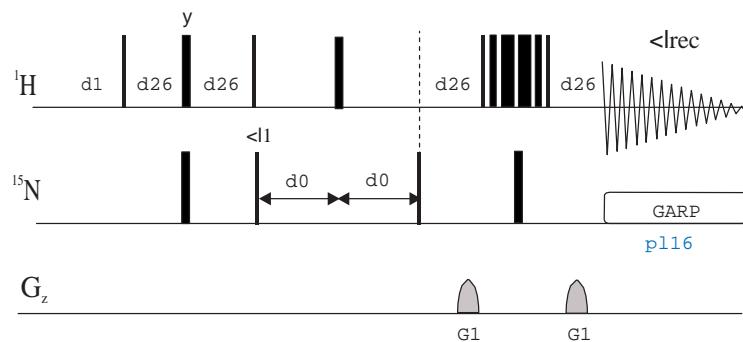


hmqcetgp

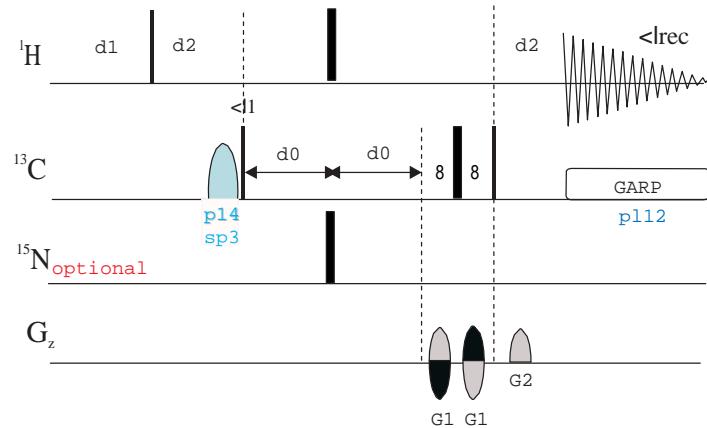


hmqcetgp.2

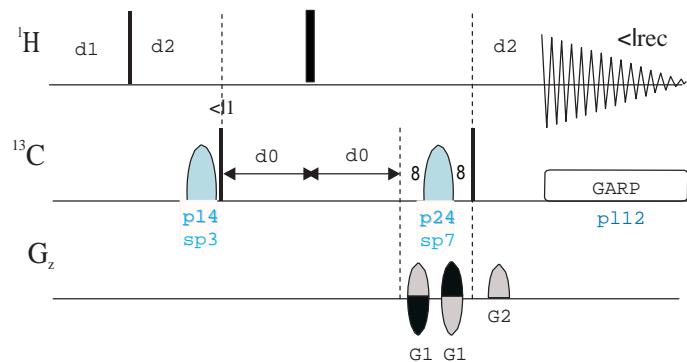


hmqcetgpsi

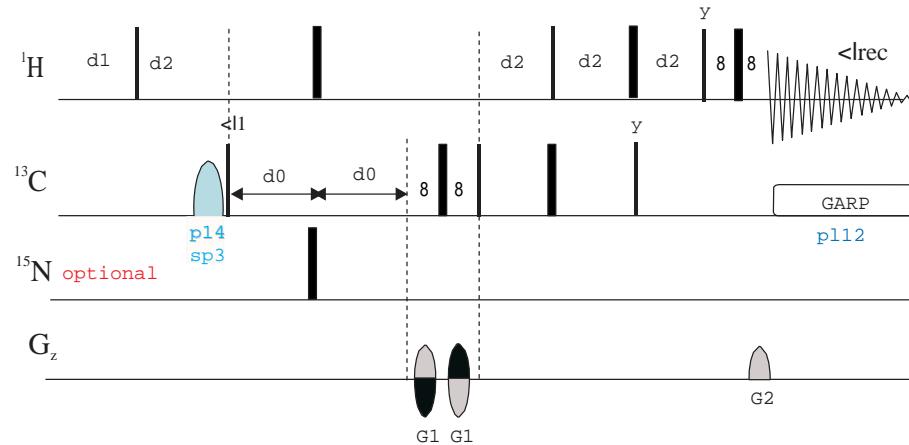


hmqcetgpsi.2

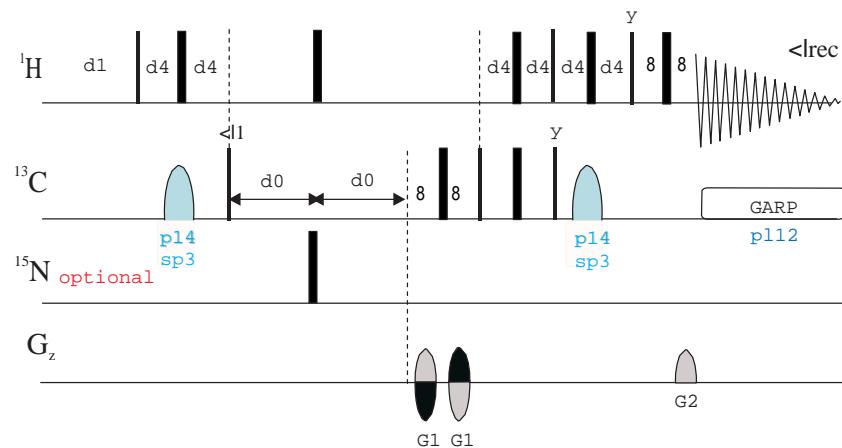


hmqcetf3gp

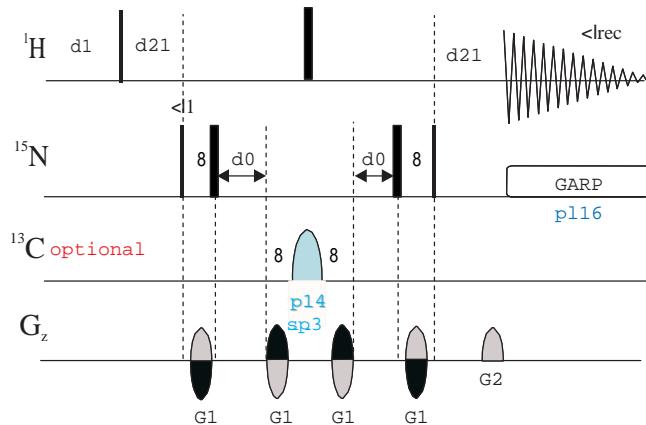


hmqcetf3gpsi

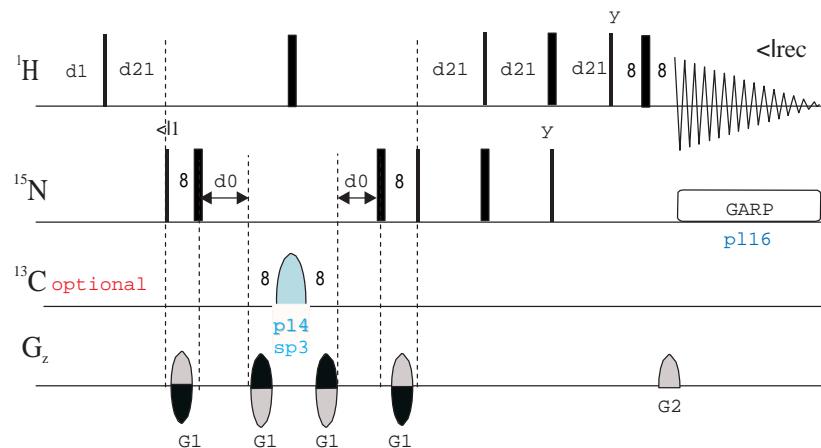

hmqcetf3gpsi.2

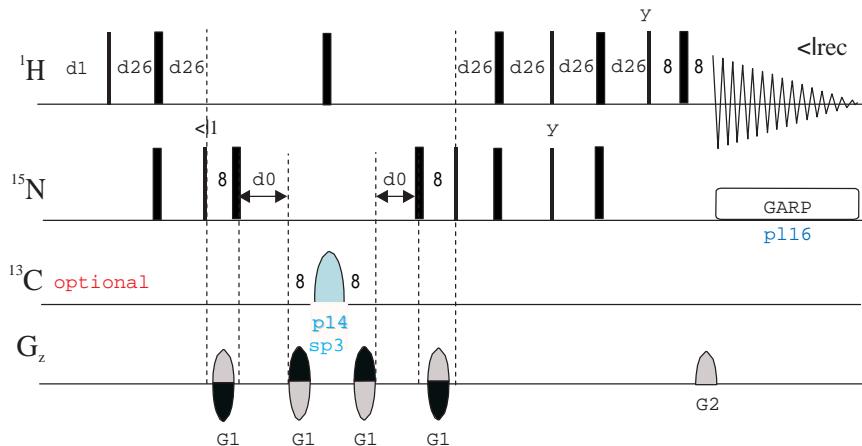

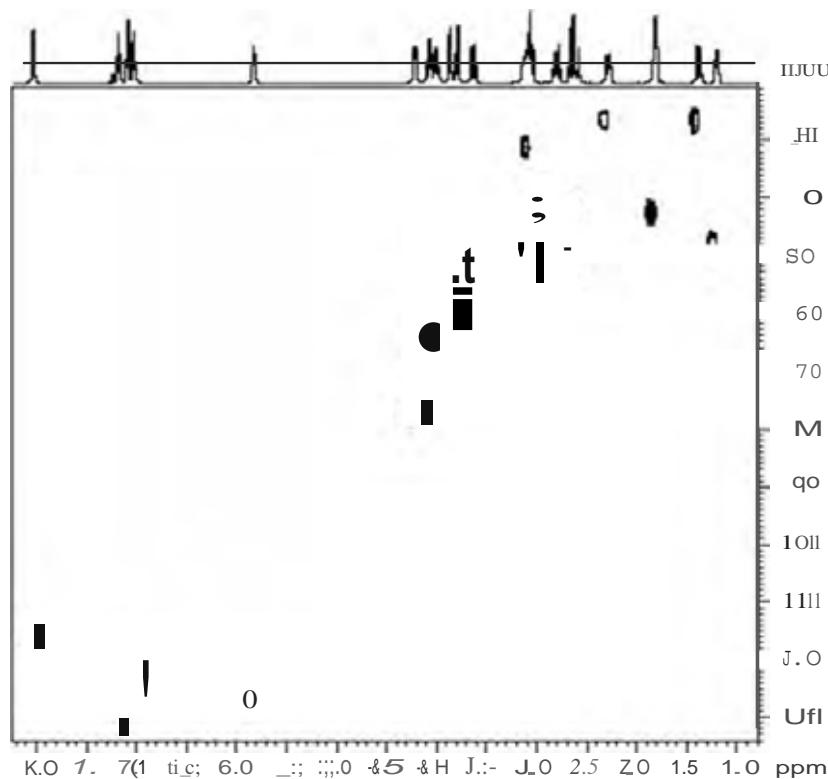


BRUKER PULSE PROGRAM CATALOGUE

NMRGuide


2D DEPT-HMQC EXPERIMENTS

Phase-sensitive 2D DEPT-HMQC (indecoph)
Phase-sensitive 2D DEPT-HMQC using BIRD (indecobiph)
Phase-sensitive 2D DEPT-HMQC-TOCSY using BIRD (indecobimlph)


indecoph

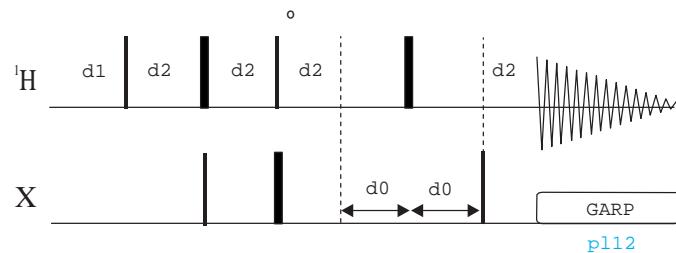

indecobiph

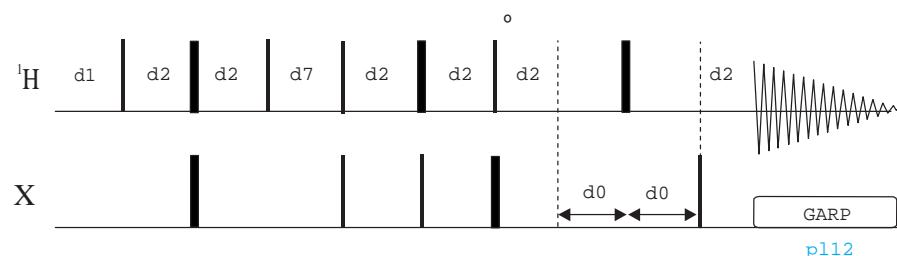

indecobimlph

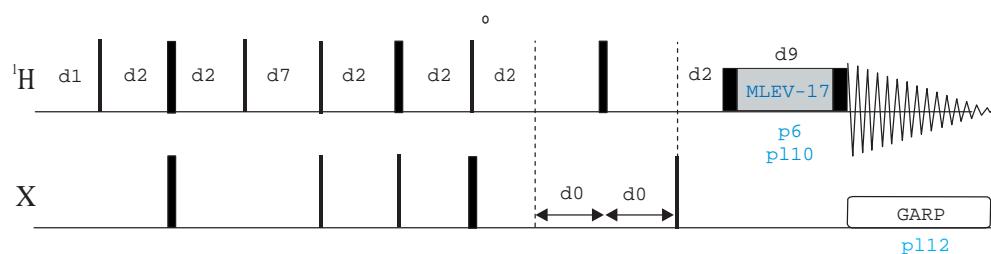

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HSQC EXPERIMENTS

FROM F2 CHANNEL

- Phase-cycled:

Phase-sensitive 2D HSQC (hsqcph)

- Phase-cycled and solvent suppression:

Phase-sensitive 2D HSQC with presaturation (hsqcphpr)

Phase-sensitive 2D HSQC with off-resonance presaturation (hsqcphps)

- Gradient-based:

Phase-sensitive ge-2D HSQC using z-filter and selection before t1 (hsqcgpph | HSQCGP)

Phase-sensitive ge-2D HSQC using z-filter and selection after t1 (hsqcgpph2)

Phase-sensitive ge-2D HSQC using echo-antiecho (hsqcetgp | HSQCETGP)

Phase-sensitive ge-2D HSQC using echo-antiecho and adiabatic pulses for inversion (hsqcetgpsp)

Phase-sensitive ge-2D HSQC using echo-antiecho and adiabatic pulses for inversion and refocusing(hsqcetgpsp.2)

Phase-sensitive ge-2D HSQC using echo-antiecho and adiabatic pulses for inversion and refocusing and BS effects(hsqcetgpsp.3)

Phase-sensitive ge-2D HSQC using PEP (hsqcetgpsi)

Phase-sensitive ge-2D HSQC using PEP with gradients in back-inept (hsqcetgpsi2)

Phase-sensitive ge-2D HSQC using PEP and adiabatic pulses for inversion(hsqcetgpsisp | HSQCETGPSISP)

Phase-sensitive ge-2D HSQC using PEP and adiabatic pulses for inversion with gradients in back-inept (hsqcetgpsisp2)

Phase-sensitive ge-2D HSQC using PEP and adiabatic pulses for inversion and refocusing (hsqcetgpsisp.2 | HSQCETGPSISP.2)

Phase-sensitive ge-2D HSQC using PEP and adiabatic pulses for inversion and refocusing with gradients in back-inept (hsqcetgpsisp2.2)

ge-2D ¹H-X HSQC experiment with X-Y-decoupling during acquisition and with selective Cb/C=O decoupling. (hsqcdhetgpsp)

FROM F3 CHANNEL

- Phase-cycled:

Phase-sensitive 2D ^1H - ^{15}N HSQC (hsqcf3ph)

- Phase-cycled and solvent suppression:

Phase-sensitive 2D ^1H - ^{15}N HSQC using presaturation (hsqcf3phpr)

- Gradient-based:

Phase-sensitive ge-2D ^1H - ^{15}N HSQC using echo-antiecho (hsqcetf3gp | HSQCETF3GP)

Phase-sensitive ge-2D ^1H - ^{15}N HSQC using PEP (hsqcetf3gpsi | HSQCETF3GPSI)

Phase-sensitive ge-2D ^1H - ^{15}N HSQC using PEP with gradients in back-inept
(hsqcetf3gpsi2)

Phase-sensitive ge-2D ^1H - ^{15}N HSQC using XY16-CPMG(hsqcetf3gpxy,
hsqcetf3gpxy.2)

- Gradient-based and solvent suppression

Phase-sensitive ge-2D ^1H - ^{15}N HSQC using water flip-back and echo-antiecho
(hsqcetfpf3gp | HSQCETFPF3GP)


Phase-sensitive ge-2D ^1H - ^{15}N HSQC using water flip-back and PEP (hsqcetfpf3gpsi |
HSQCETFPF3GPSI)

Phase-sensitive ge-2D ^1H - ^{15}N HSQC using water flip-back and PEP with gradients in
back-inept (hsqcetfpf3gpsi2)


Phase-sensitive ge-2D ^1H - ^{15}N HSQC using WATERGATE (3-9-19) (hsqcf3gpph19)
Fast-HSQC, Phase-sensitive ge-2D ^1H - ^{15}N HSQC using WATERGATE (3-9-19)
(fhsqcf3gpph | FHSQCF3GPPH)

Phase-sensitive ge-2D ^1H - ^{15}N HSQC using water flip-back and WATERGATE
(selective pulse) (hsqcfpf3gpphwg | HSQCFPF3GPPHWG)


hsqcph

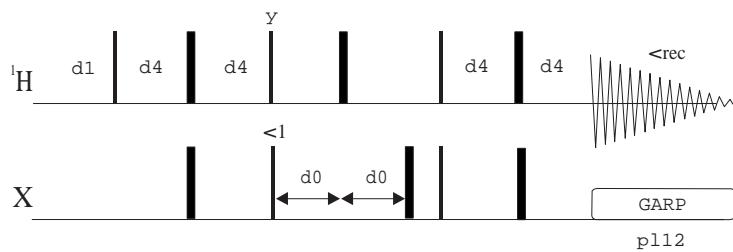


hsqcf3ph

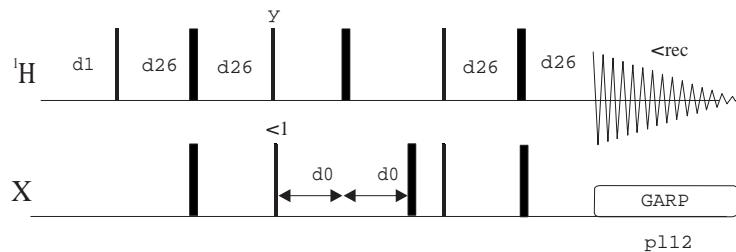


hsqcphpr

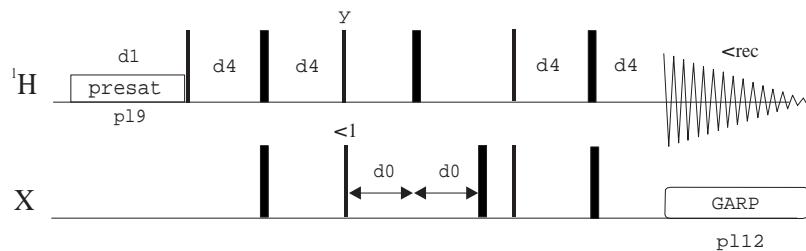





hsqcf3phpr


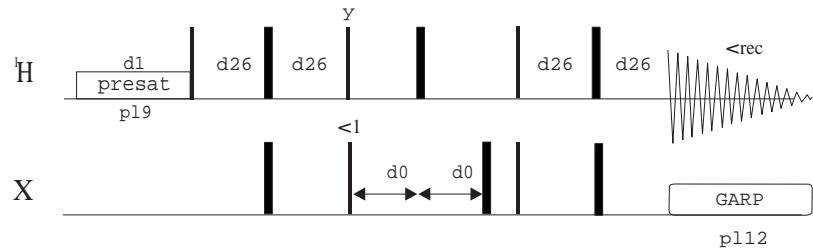


hsqcphps

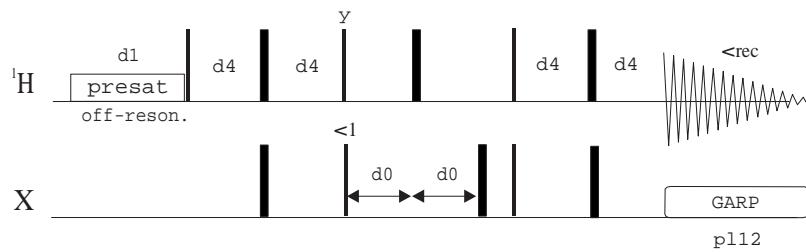


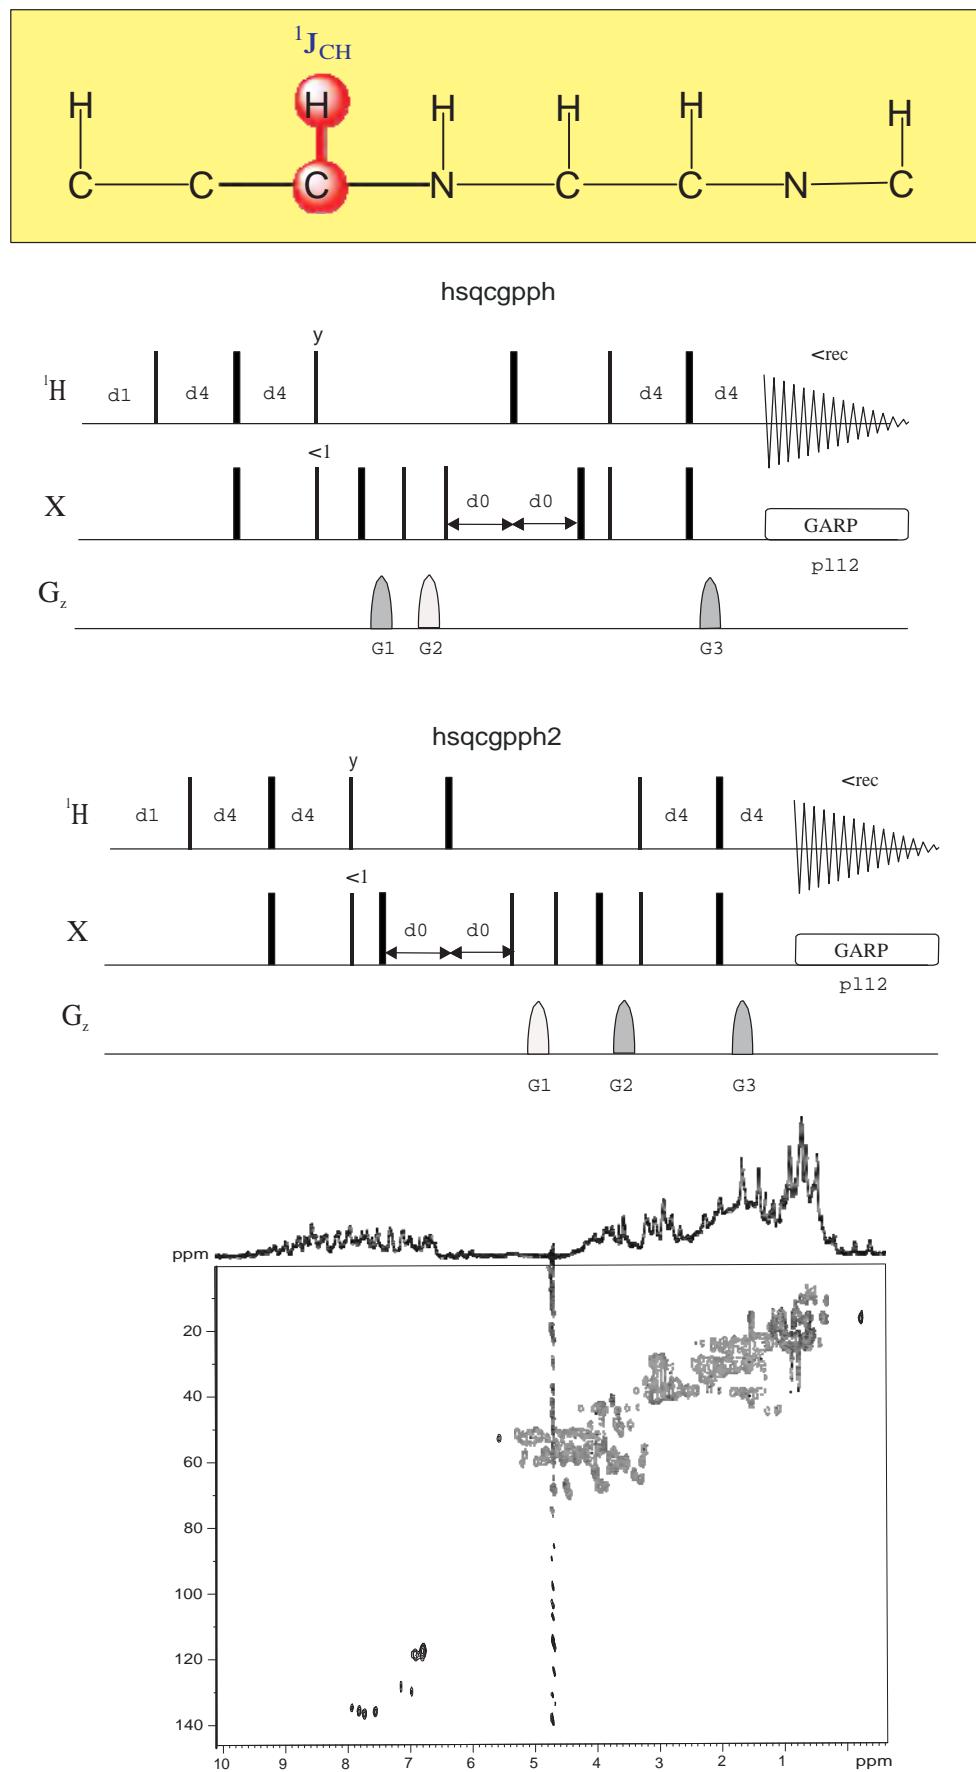

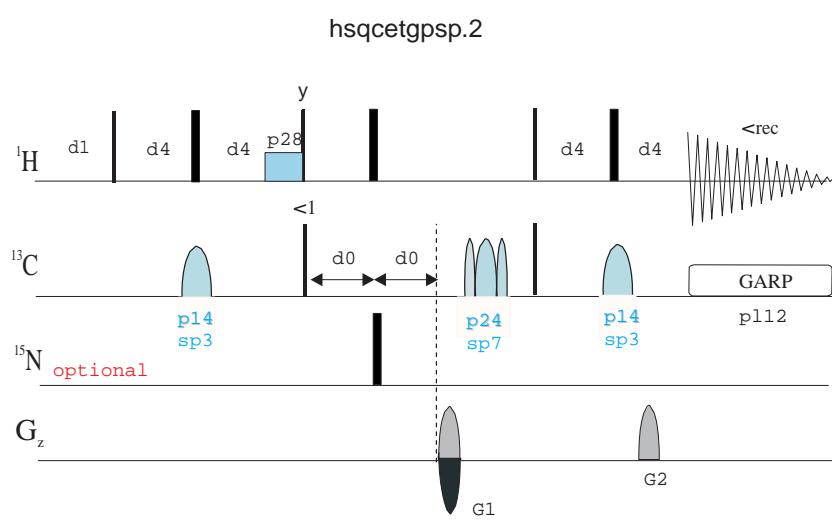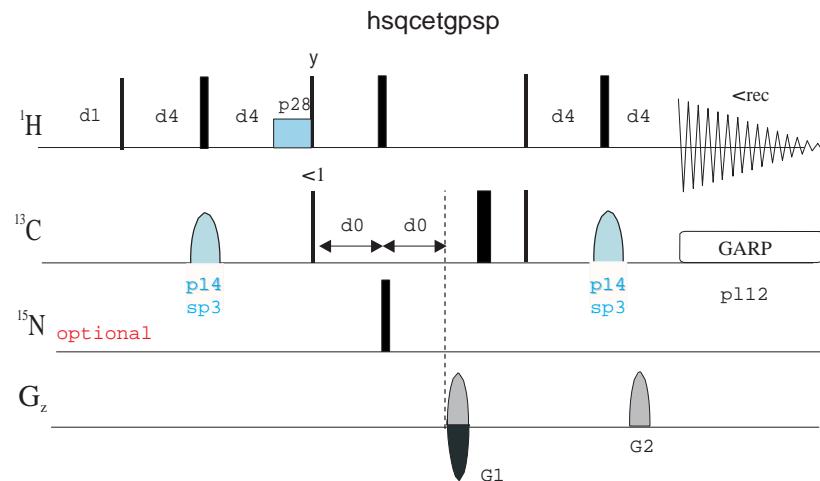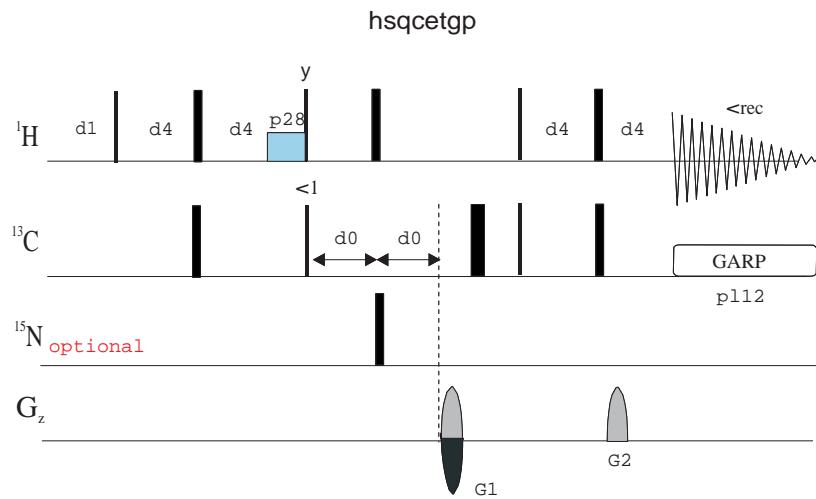


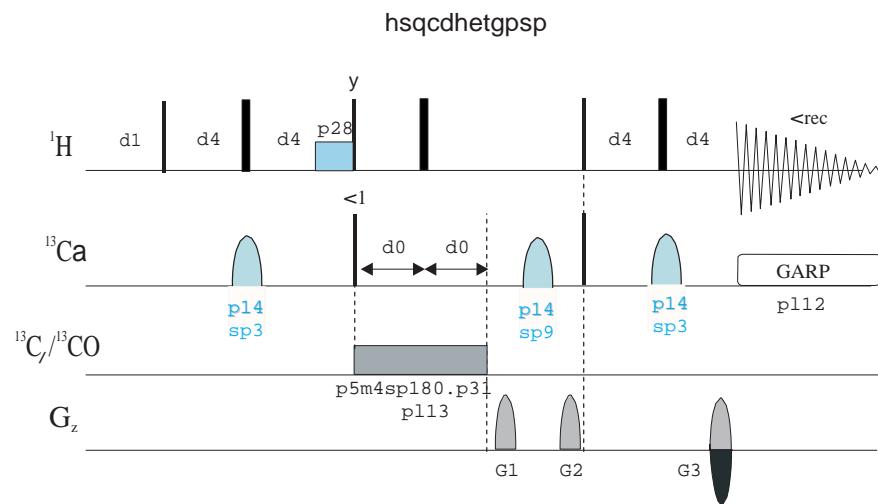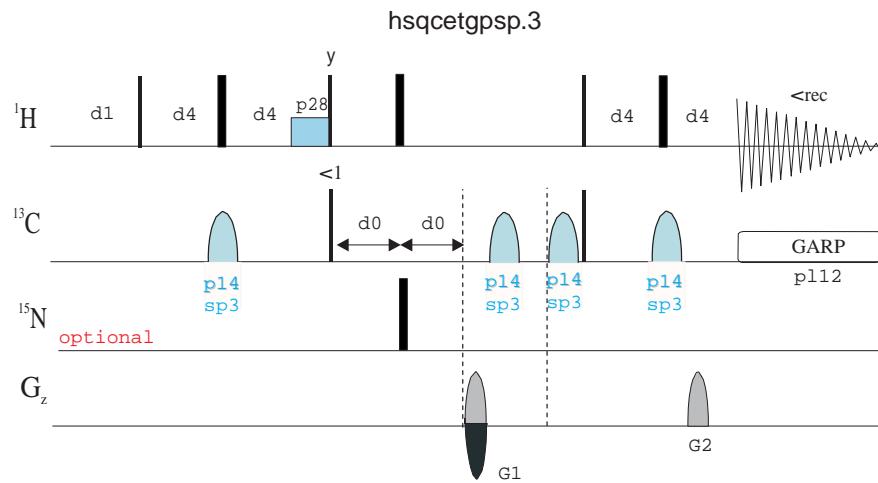


hsqcetgpsi

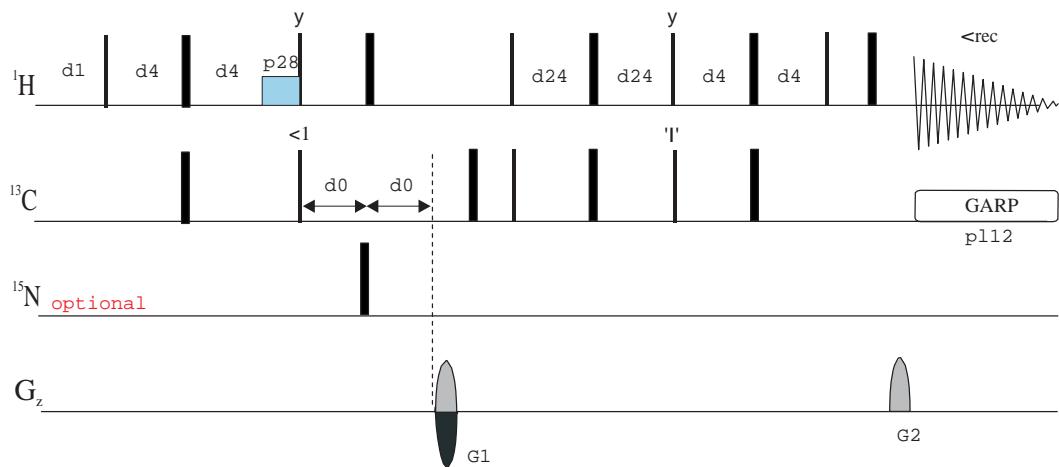


hsqcetgpsi2

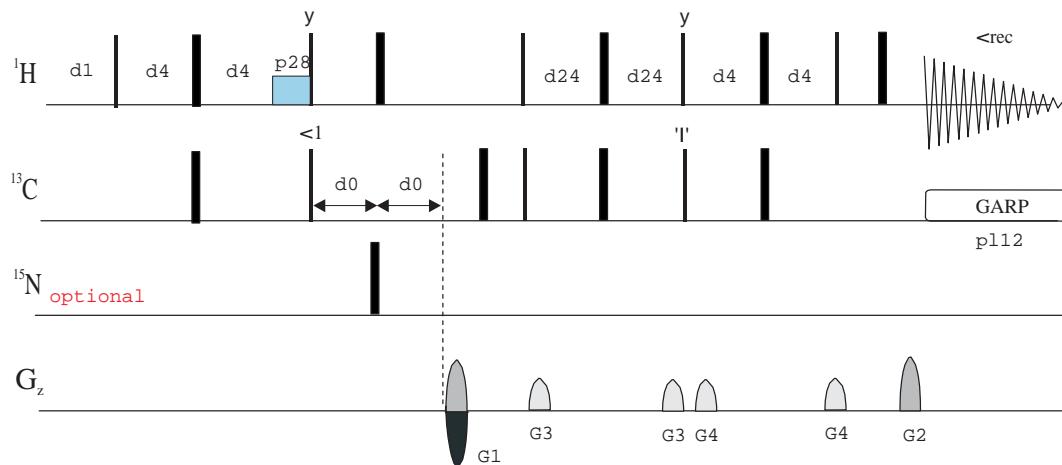


hsqcetgpsisp

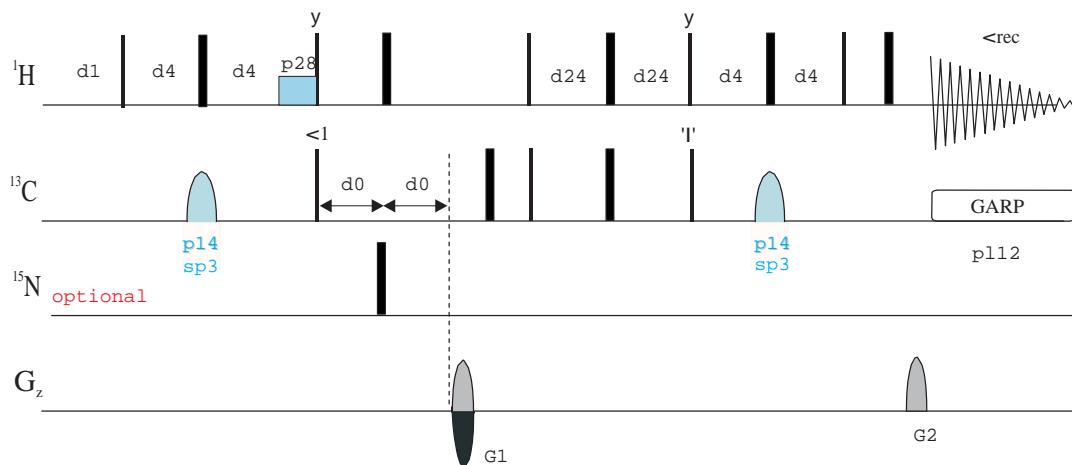


hsqcetgpsisp2

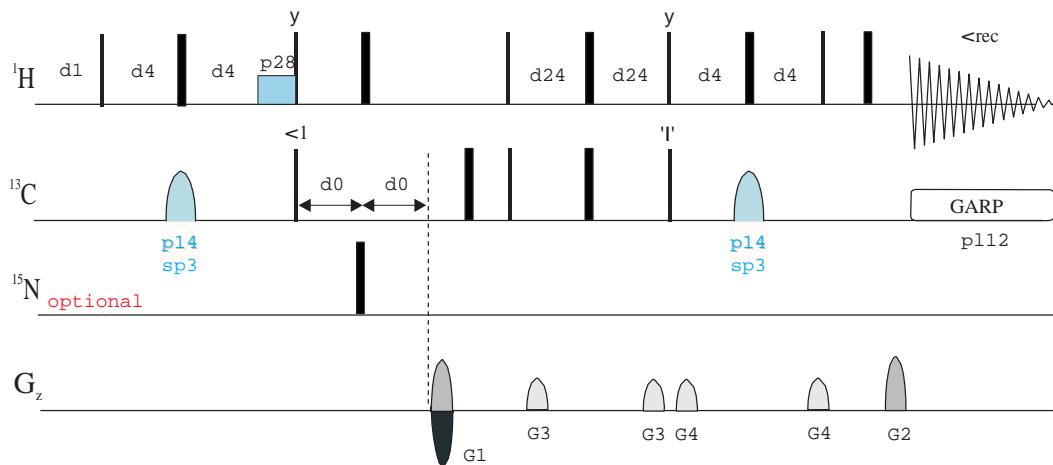


hsqcetgpsisp.2



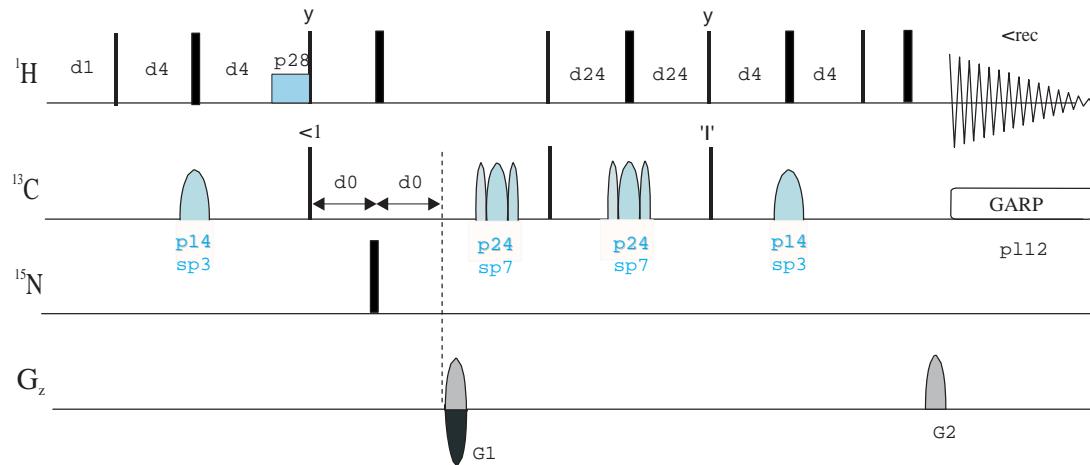


hsqcetgpsisp2.2

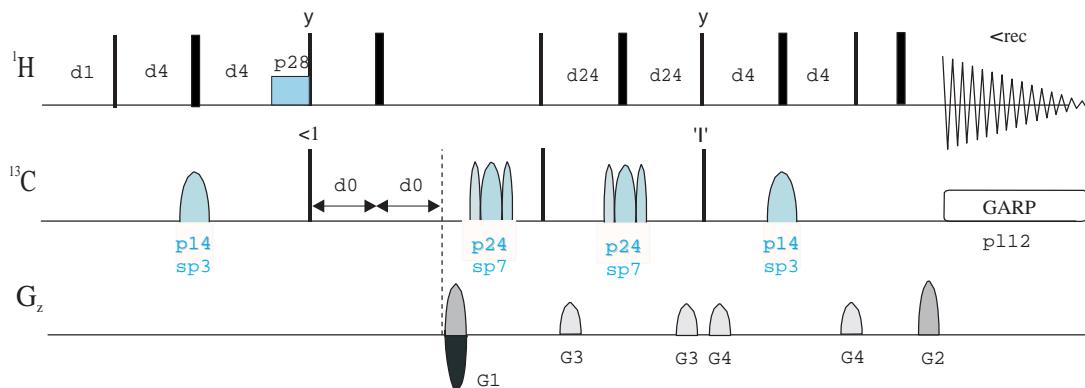


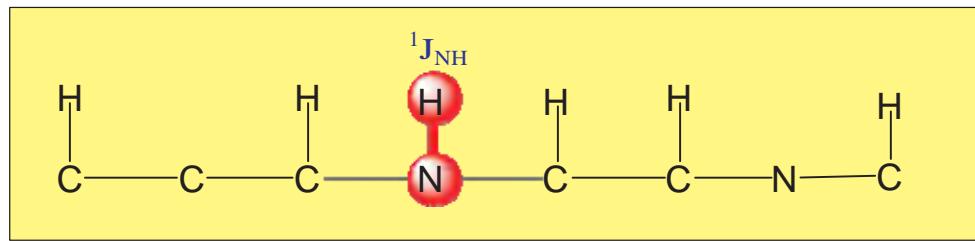


hsqcetf3gp

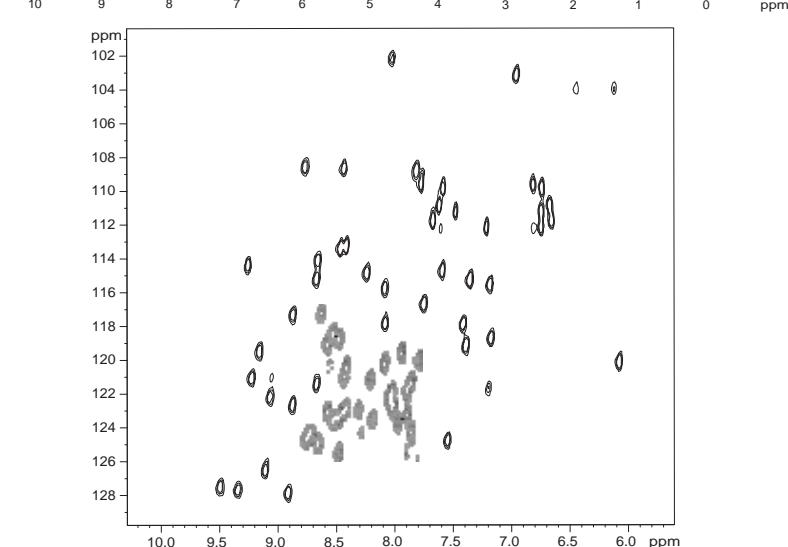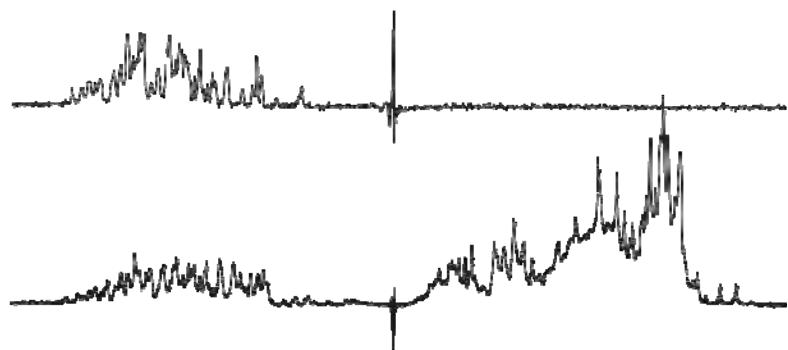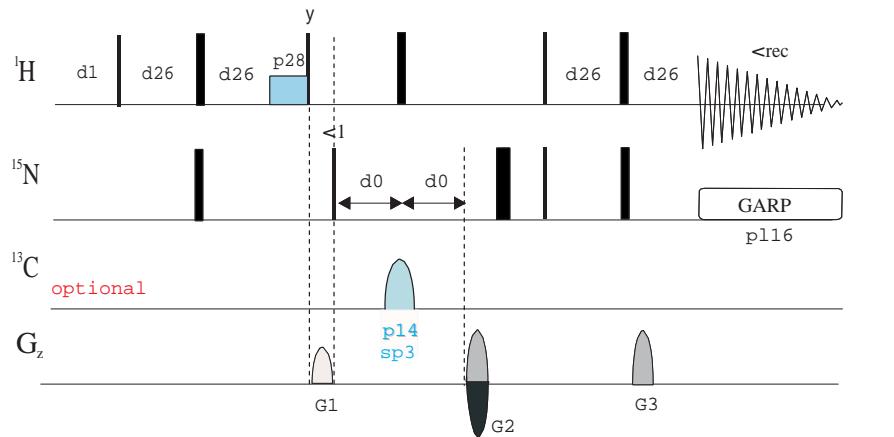


hsqcetf3gpsi

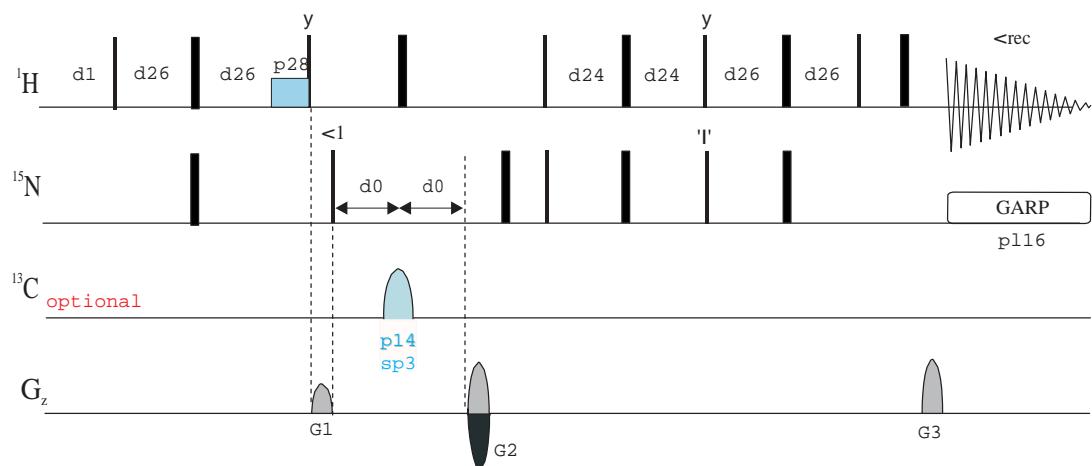


hsqcetf3gpsi2

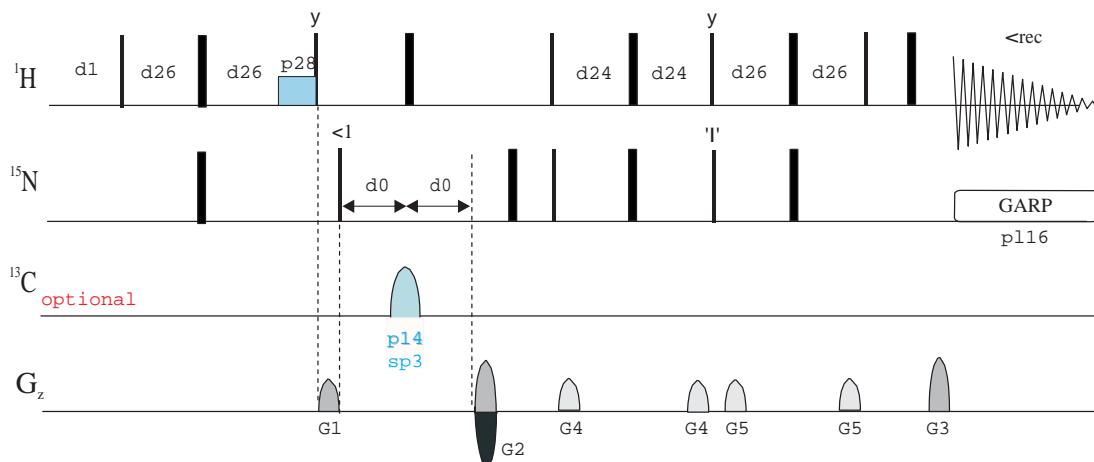


1H-15N HSQC List quiet time 1mM 500 MHz
Optional ¹³C decoupling during t1
in doubly-labeled proteins
zgoptns -DLABEL_CN in eda

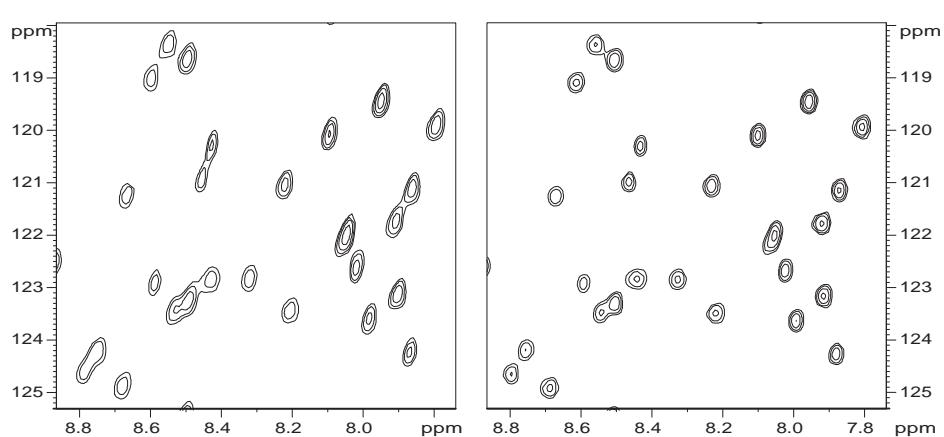


hsqcetfpf3gpsi

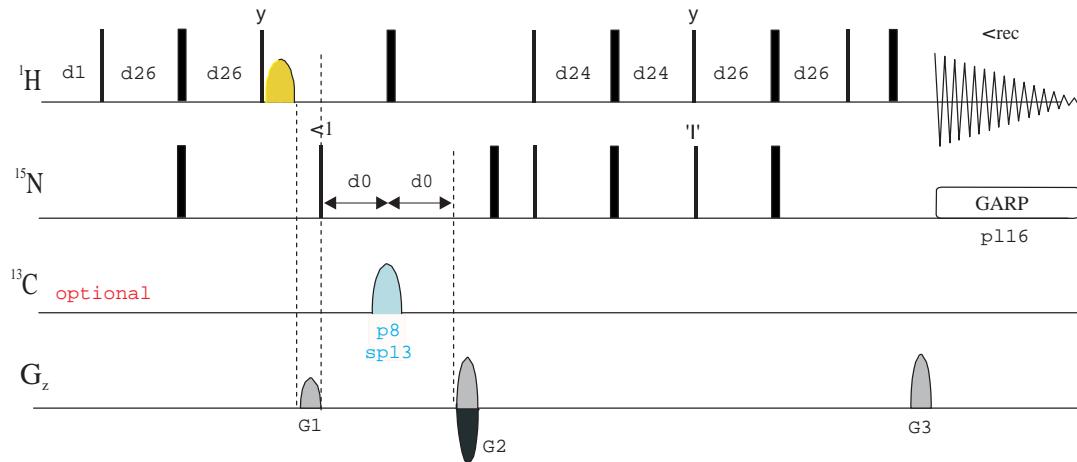


hsqcetfpf3gpsi2

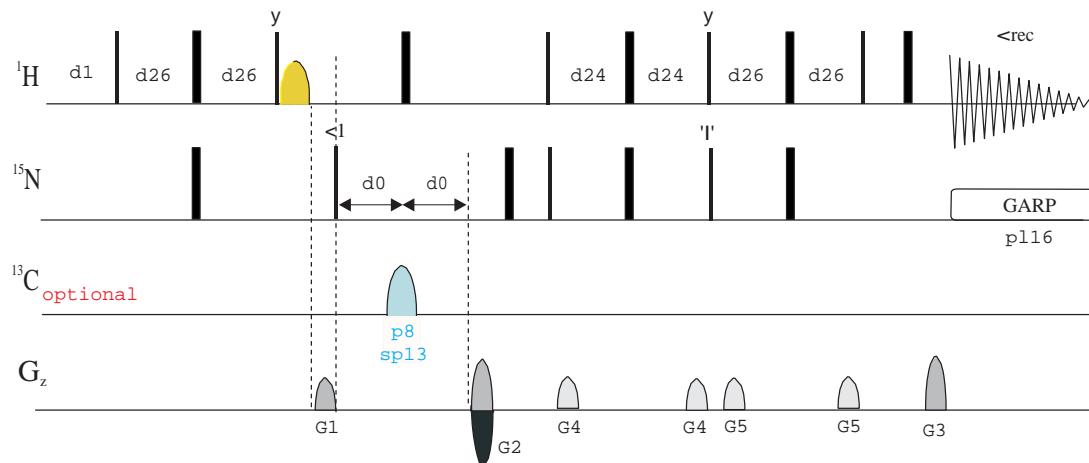


fhsqcf3gpph

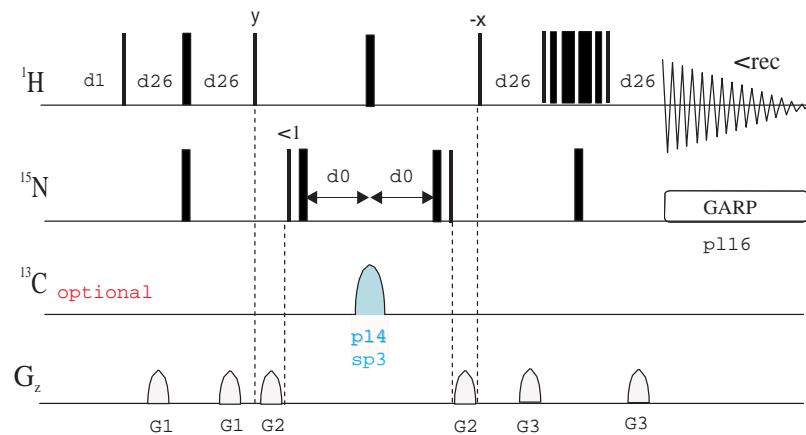


hsqcf3gpph19

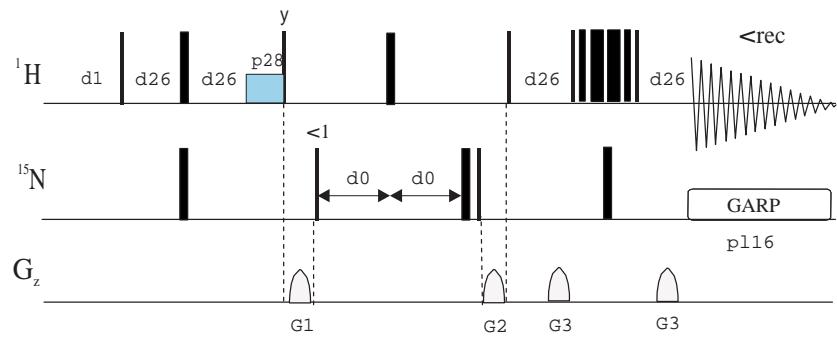


hsqcetfpf3gp

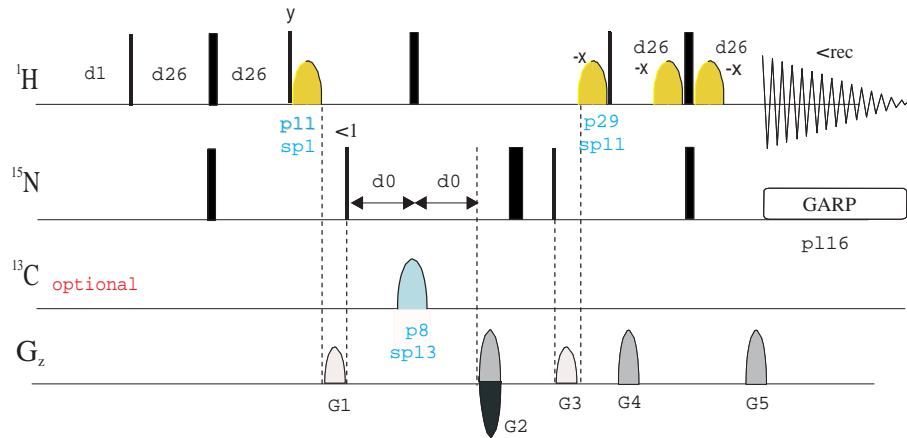


hsqcfpf3gpphwg

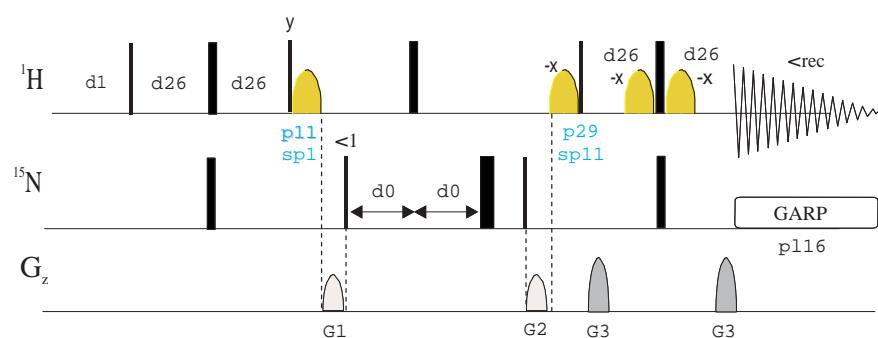

hsqcetf3gpxy

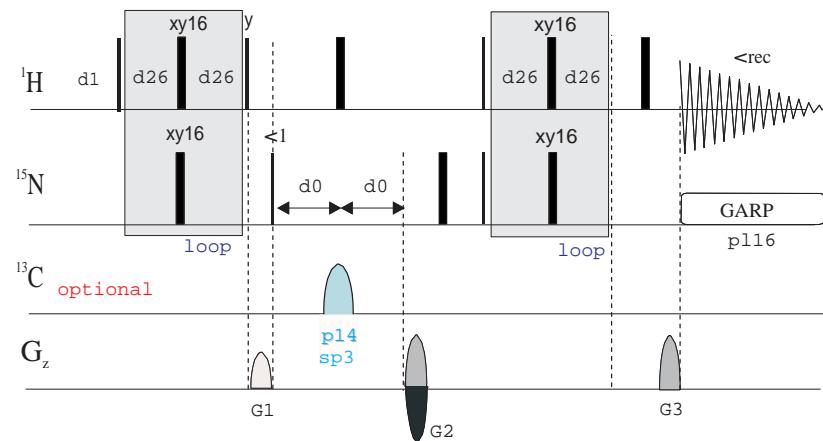

hsqcetf3gpxy.2

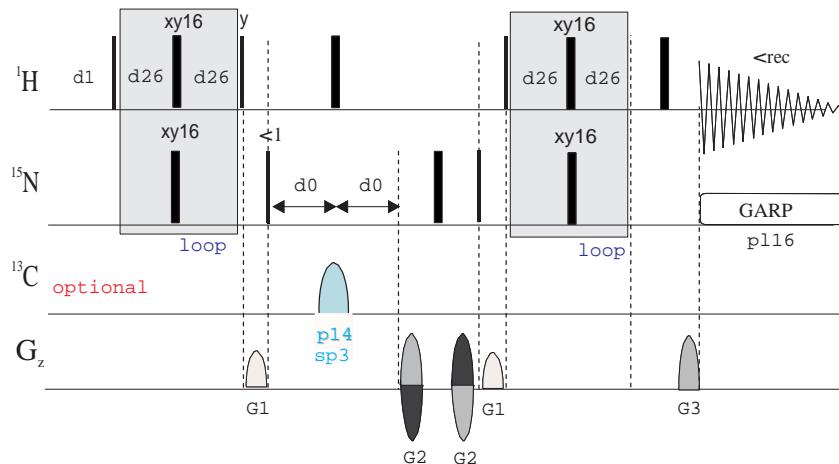

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide


2D MULTIPLICITY-EDITED
HSQC EXPERIMENTS

Gradient-enhanced form f2 channel


Phase-sensitive ge-2D multiplicity-edited HSQC using z-filter (hsqcedgpph | HSQCEDGPPH)
Phase-sensitive ge-2D multiplicity-edited HSQC using echo-antiecho (hsqcedetgp | HSQCEDETGP)
Phase-sensitive ge-2D multiplicity-edited HSQC using echo-antiecho and adiabatic pulses (hsqcedetgpsp)
Phase-sensitive ge-2D multiplicity-edited HSQC using echo-antiecho and inversion and matched sweep adiabatic pulses (hsqcedetgpsp.3)
Phase-sensitive ge-2D multiplicity-edited HSQC using PEP and adiabatic inversion pulses (hsqcedetgpsisp)
Phase-sensitive ge-2D multiplicity-edited HSQC using PEP and adiabatic inversion and refocusing pulses (hsqcedetgpsisp.2)
Phase-sensitive ge-2D multiplicity-edited HSQC using PEP and adiabatic inversion pulses with gradients in back-inept (hsqcedetgpsisp2)
Phase-sensitive ge-2D multiplicity-edited HSQC using PEP and adiabatic inversion and refocusing pulses with gradients in back-inept (hsqcedetgpsisp2.2)
Phase-sensitive ge-2D multiplicity-edited HSQC using PEP and inversion, refocusing and matched sweep adiabatic pulses with gradients in back-inept (hsqcedetgpsisp2.3)

Gradient-enhanced form f3 channel


Phase-sensitive ge-2D ^1H - ^{15}N HSQC-edited using PEP (hsqcedetf3gpsi)
Phase-sensitive ge-2D ^1H - ^{15}N HSQC-edited using PEP with gradients in back-inept (hsqcedetf3gpsi2)

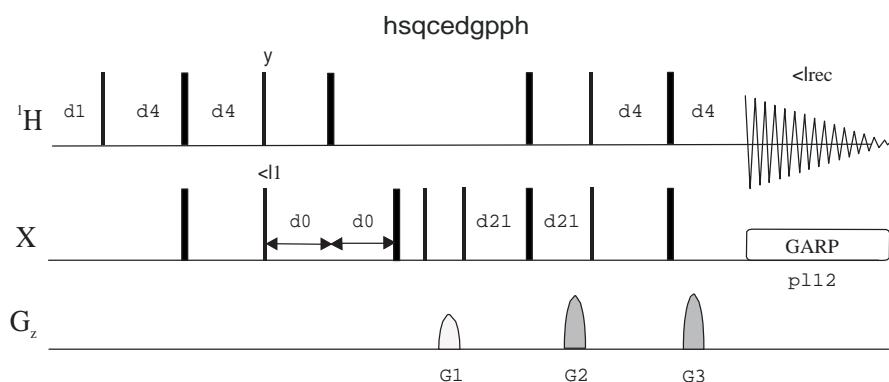


hsqcedetgp

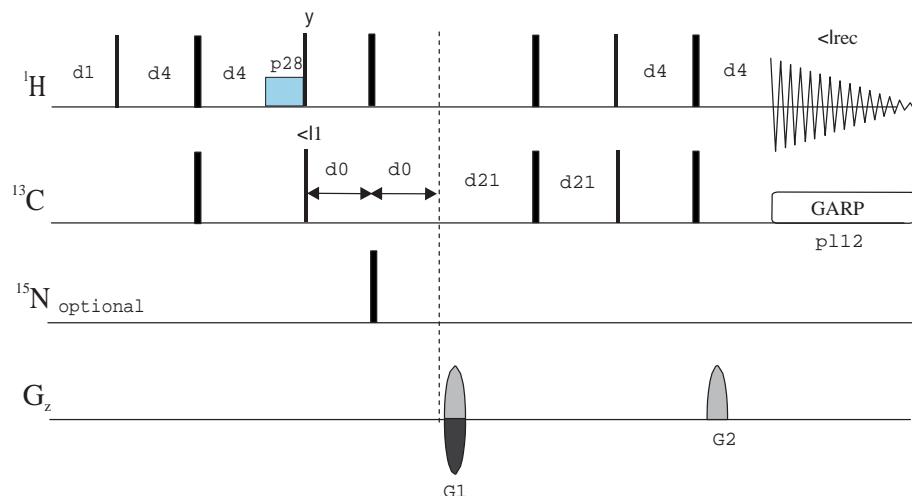


hsqcedetgpsp

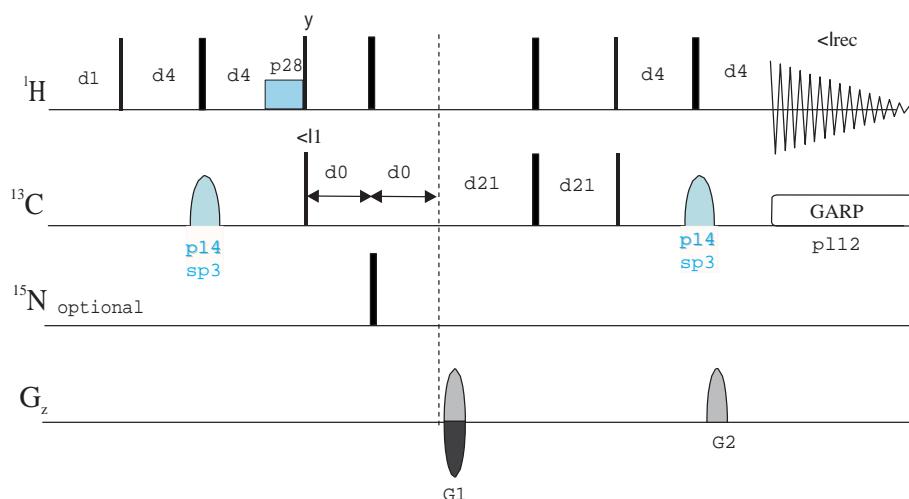



hsqcedetgpsp.3

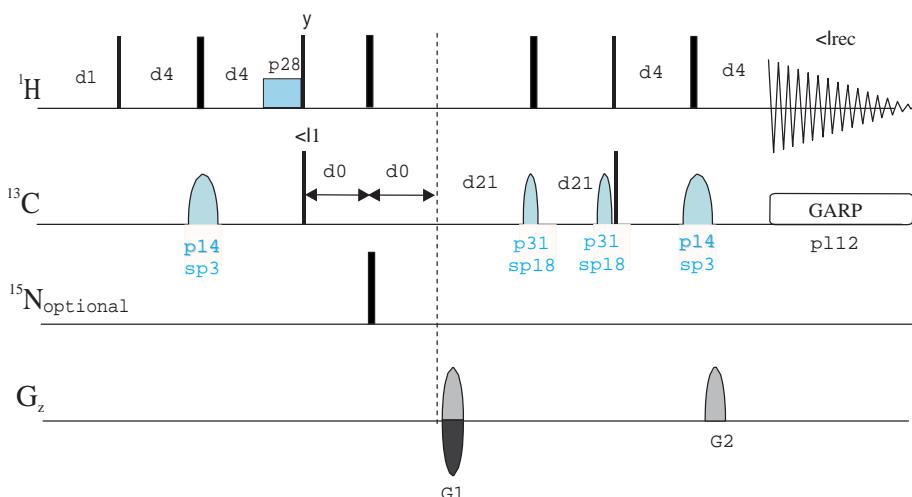


hsqcedetgpsisp

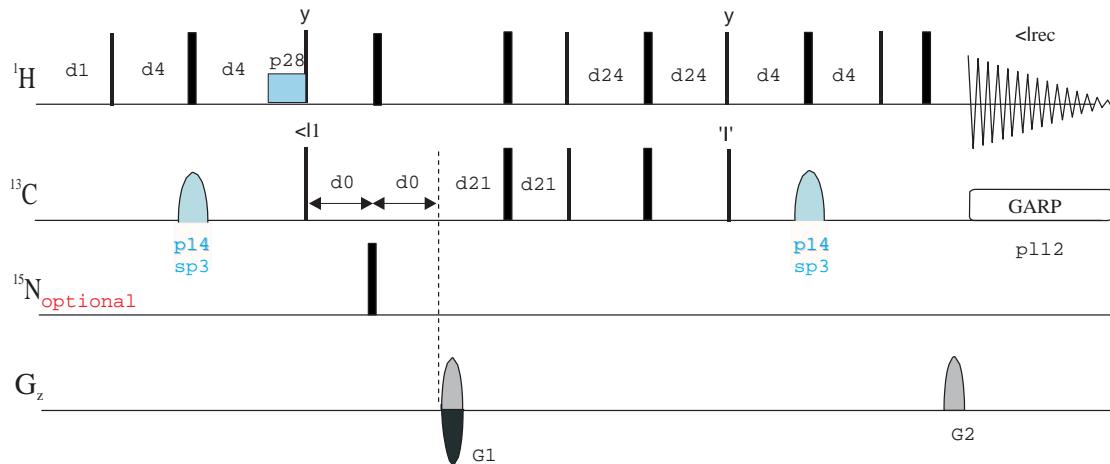


hsqcedetgpsisp2

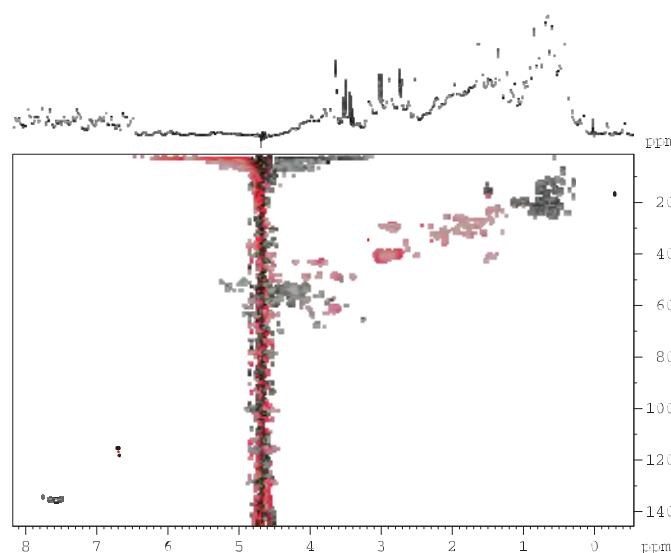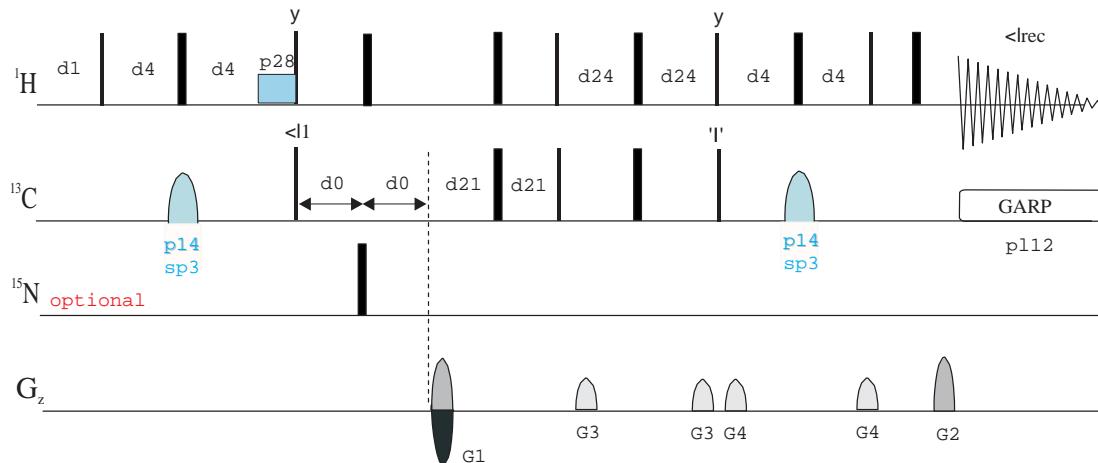


hsqcedetgpsisp.2

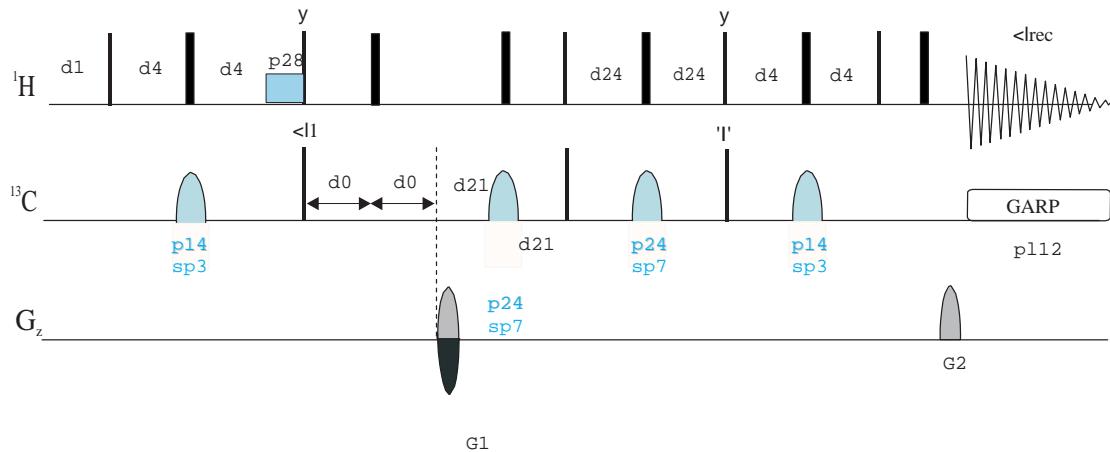


hsqcedetgpsisp2.2

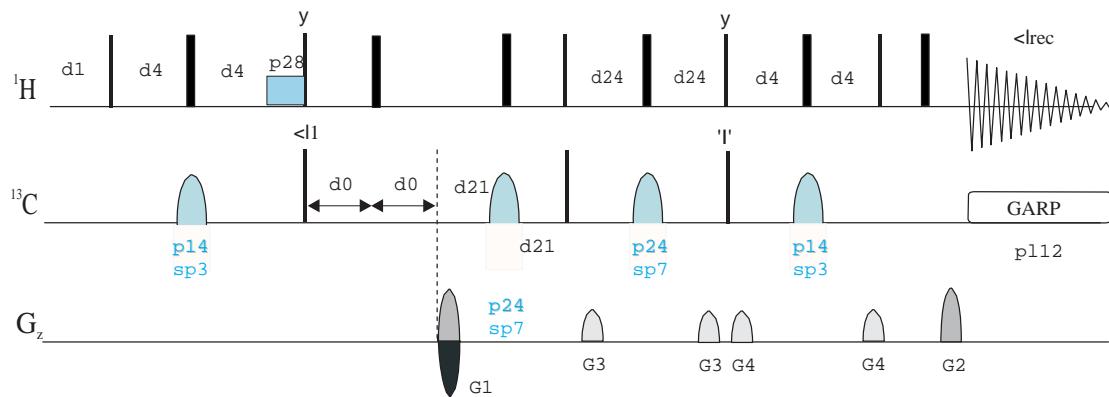



hsqcedetgpsisp2.3

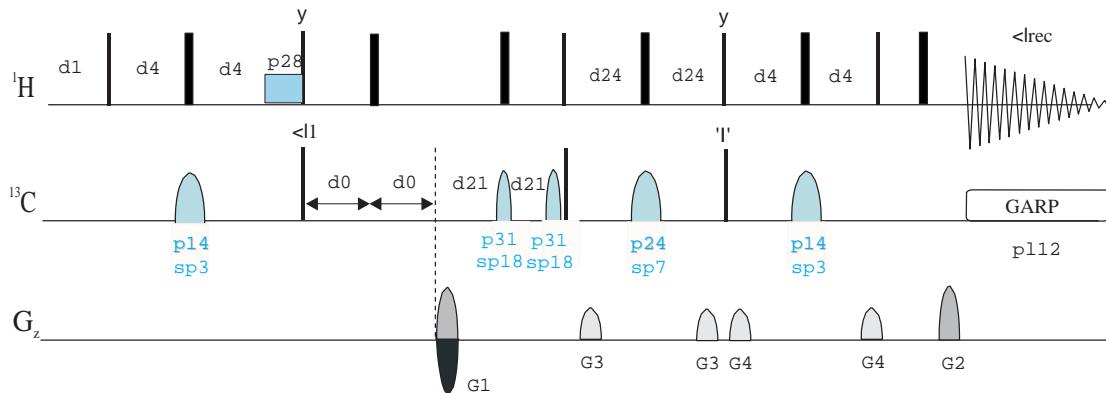

hsqcedetf3gpsi

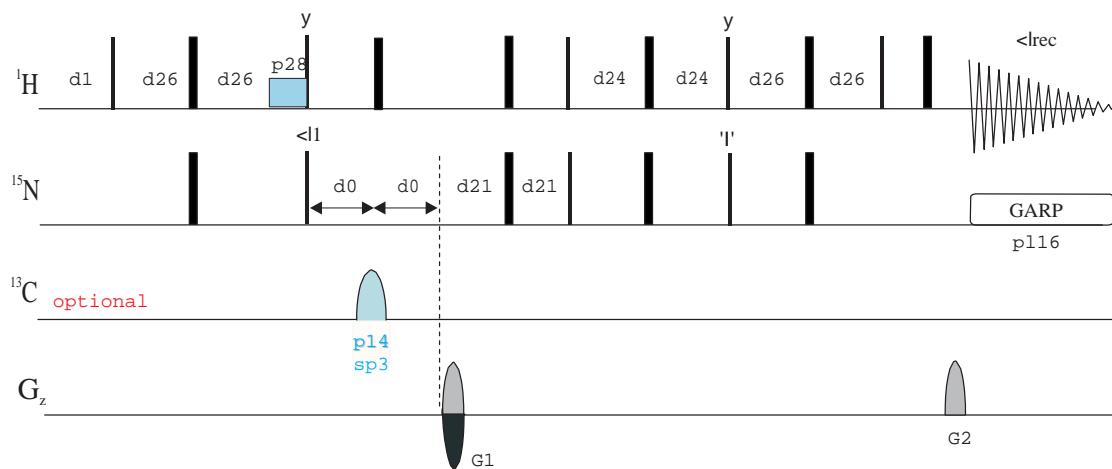

hsqcedetf3gpsi2

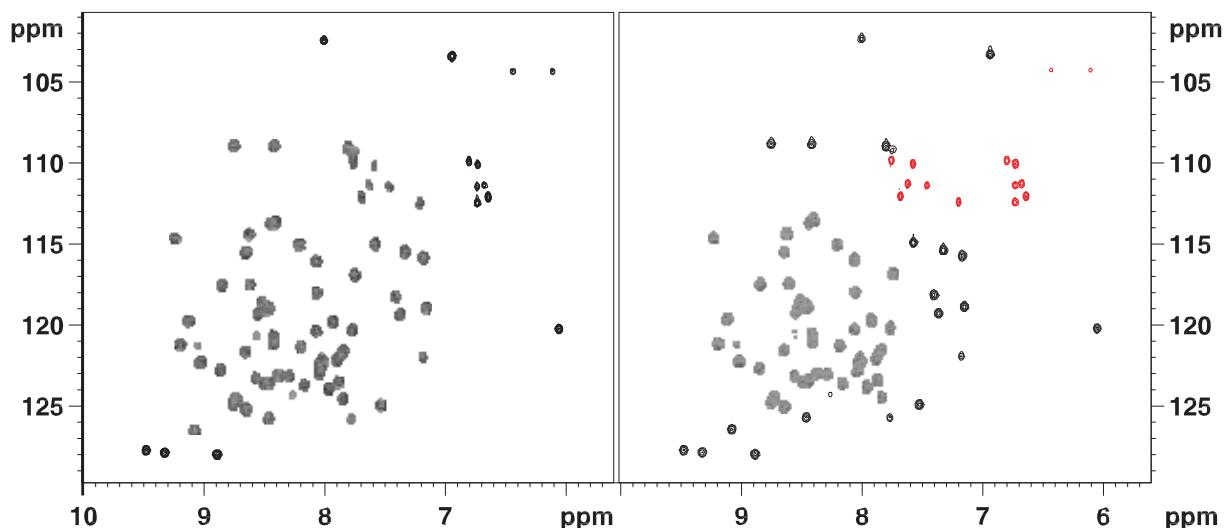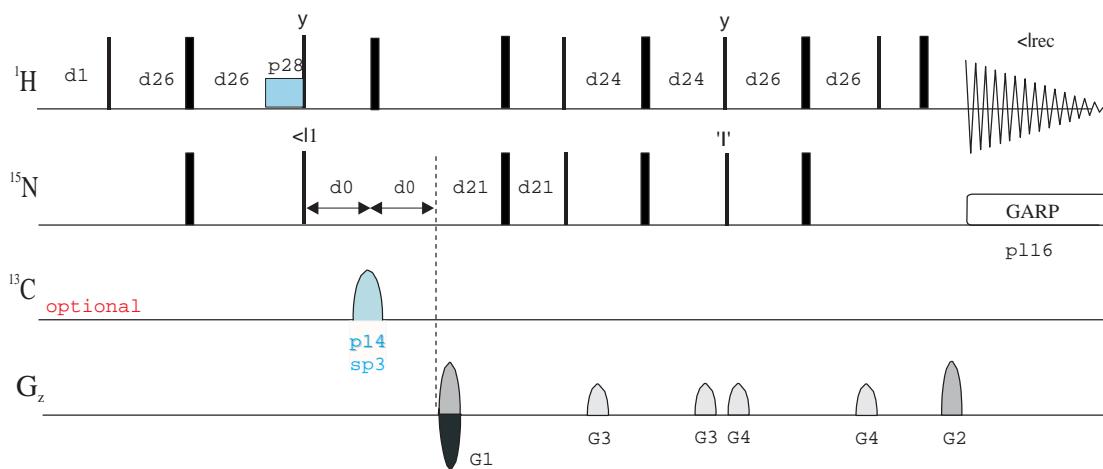

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D CONSTANT-TIME
HSQC AND HMQC
EXPERIMENTS

2D Constant-time Correlations


Phase-sensitive Constant-time ge-2D HSQC

- Using adiabatic pulses (hsqcctetgpsp)
- Using adiabatic pulses without CO refocusing (hsqcctetgpsp.2)
- Using adiabatic pulses and PEP (hsqcctetgpsisp)


Phase-sensitive Constant-time ge-2D HMQC



- Using adiabatic pulses (hmqcctetgp)
- For correlating CH₂ groups (hsqcctetgp.2)

Also see hsqcctetgpjc and hsqcctetgpjclr

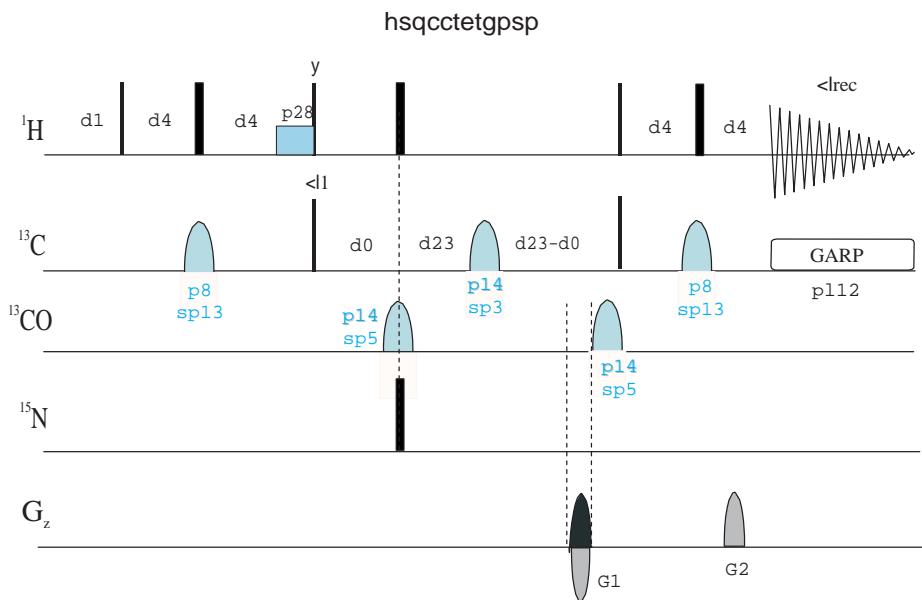


hsqcctetgpsp.2

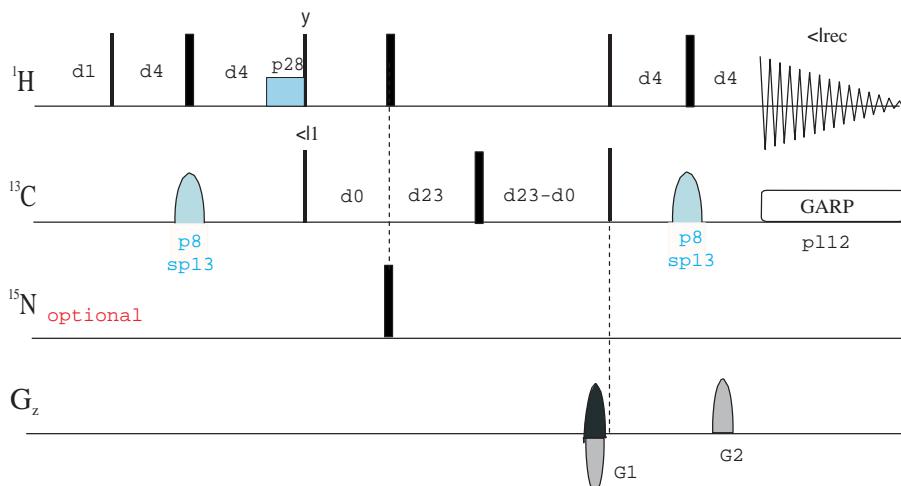


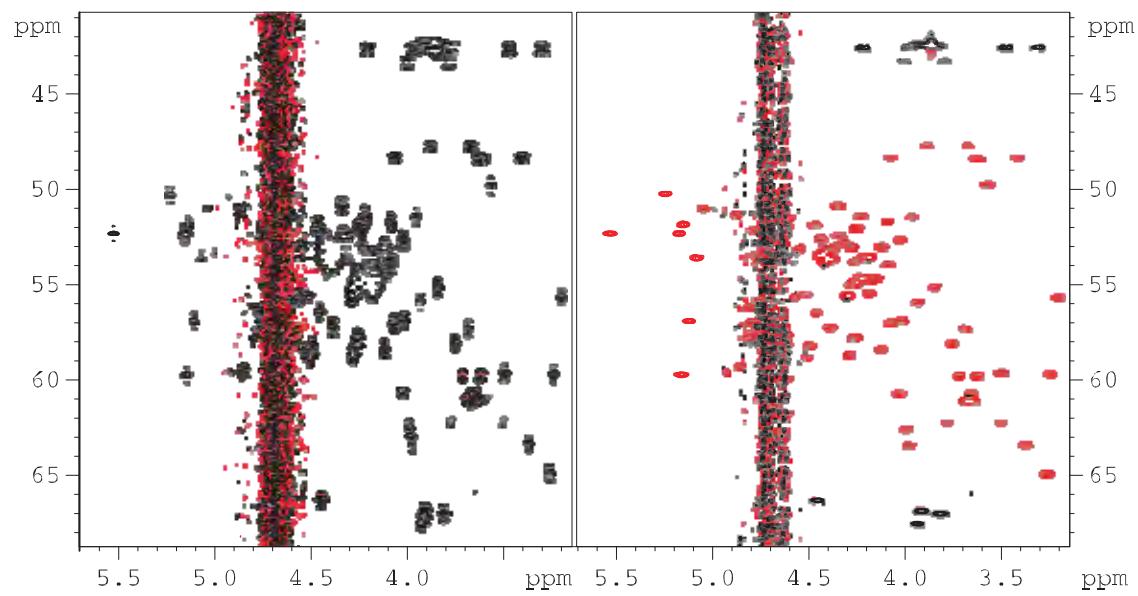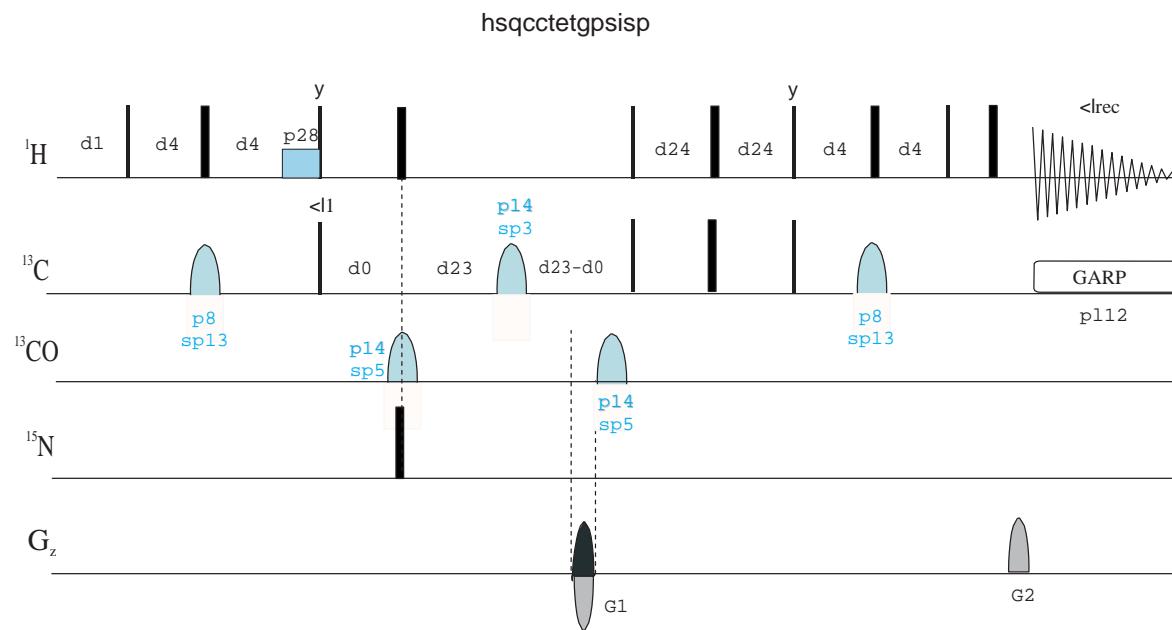

hmqcctetgp

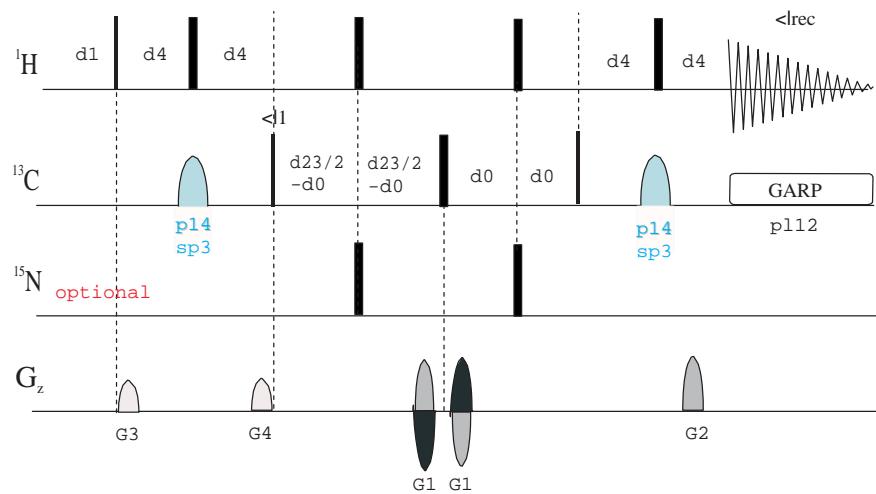

hmqcctetgp.2

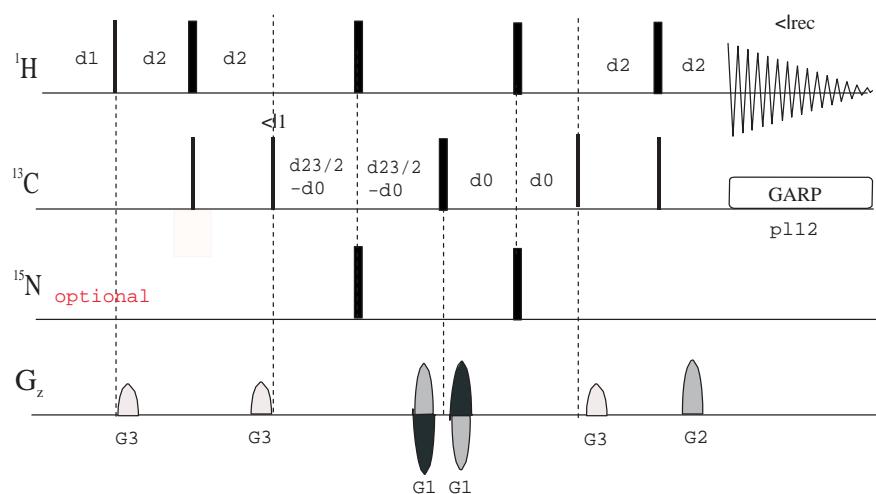


BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D INVERSE-INEPT
EXPERIMENT

Phase-sensitive ge-2D Inverse INEPT using echo-antiecho (xhcoetgp)

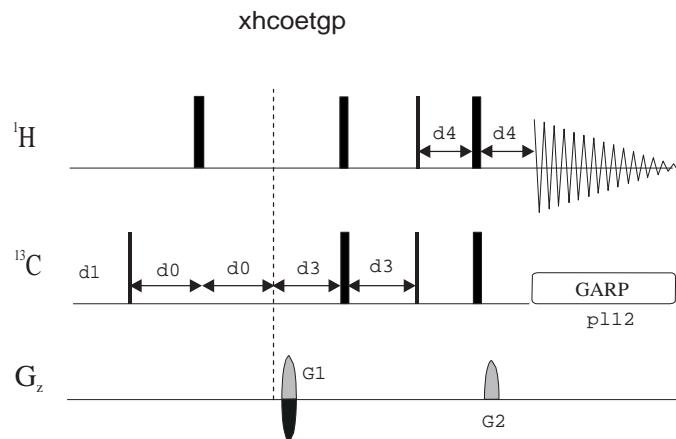

BRUKER
PULSE PROGRAM
CATALOGUE

NMRGuide



2D SPIN-EDITED
HSQC EXPERIMENTS

One-bond ^1H - ^{15}N Couplings



- ge-2D ^1H - ^{15}N α,ϕ -HSQC (hsqcetf3gpss)
 - ge-2D ^1H - ^{15}N HSQC-IPAP using watergate (hsqcf3gpiaphwg)
 - ge-2D ^1H - ^{15}N HSQC-IPAP using watergate and sensitivity improvement (hsqcf3gpiaphsiwg)

One-bond ^1H - ^{13}C Couplings


- 2D H-1/C-13 CT-HSQC (hsqcctetgjc)

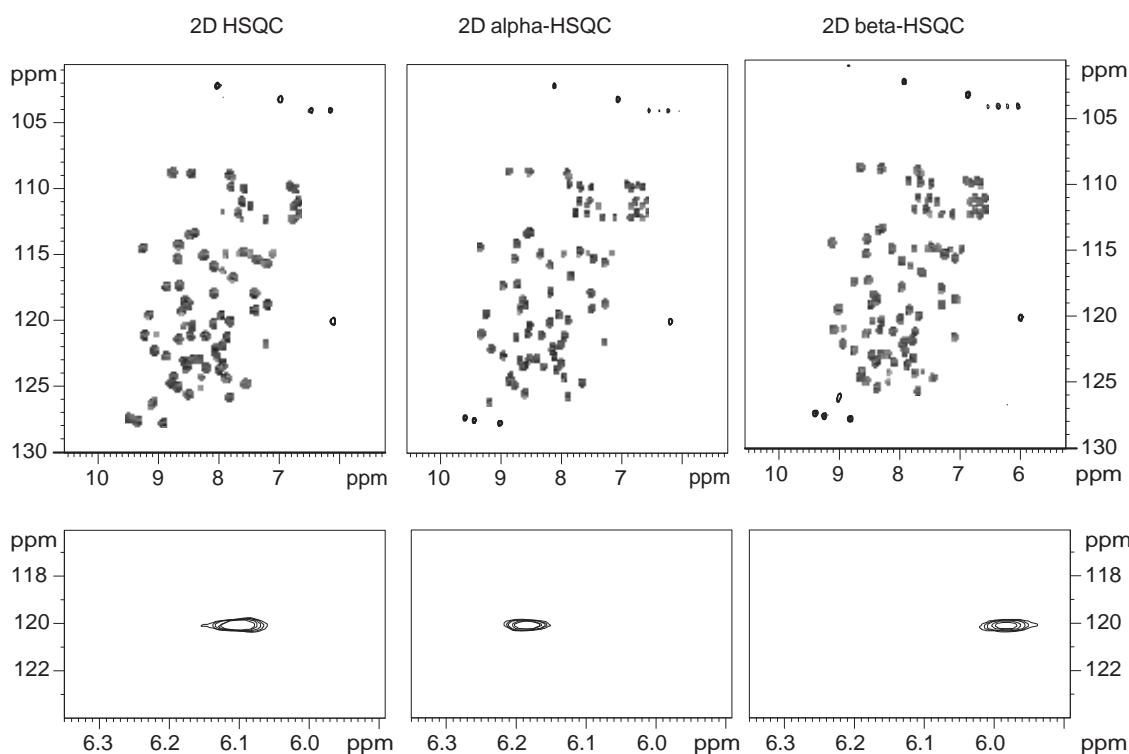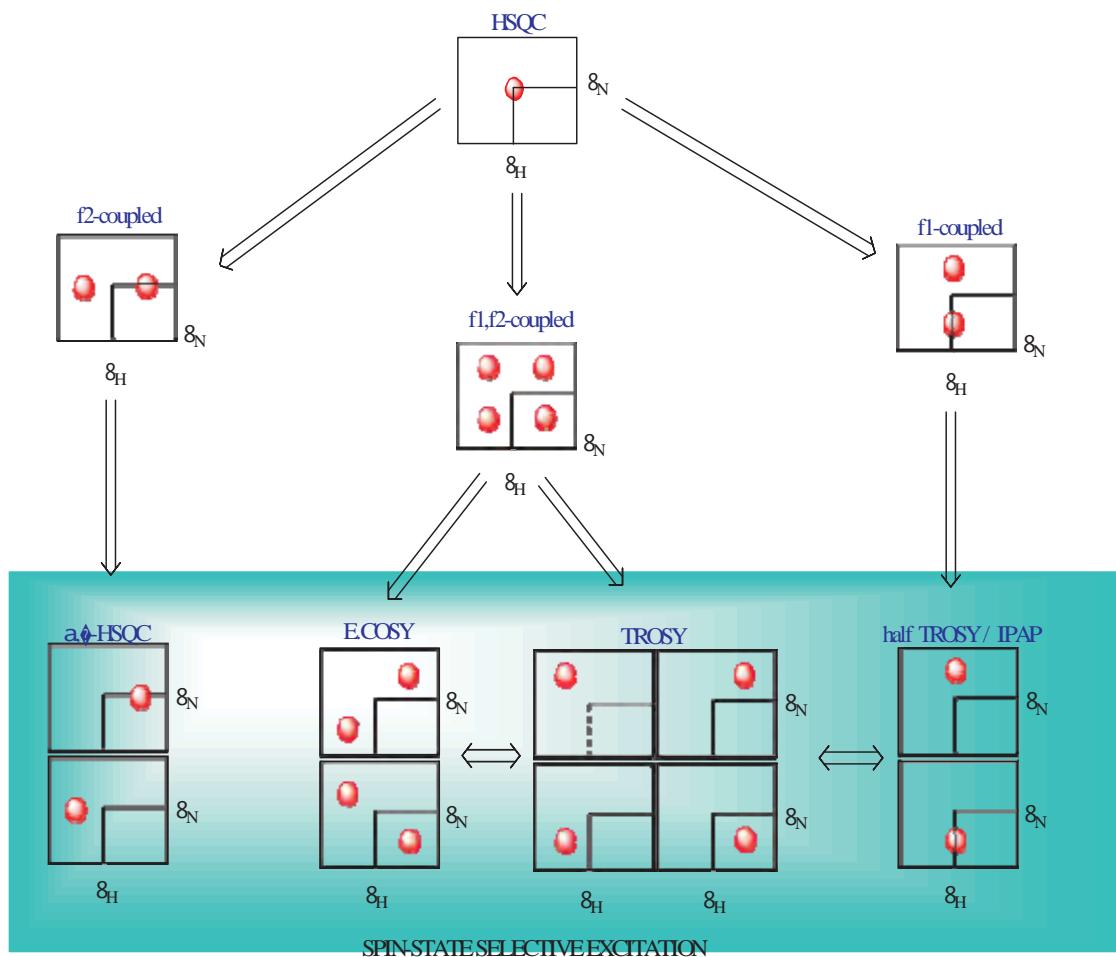



hsqcetf3gpss

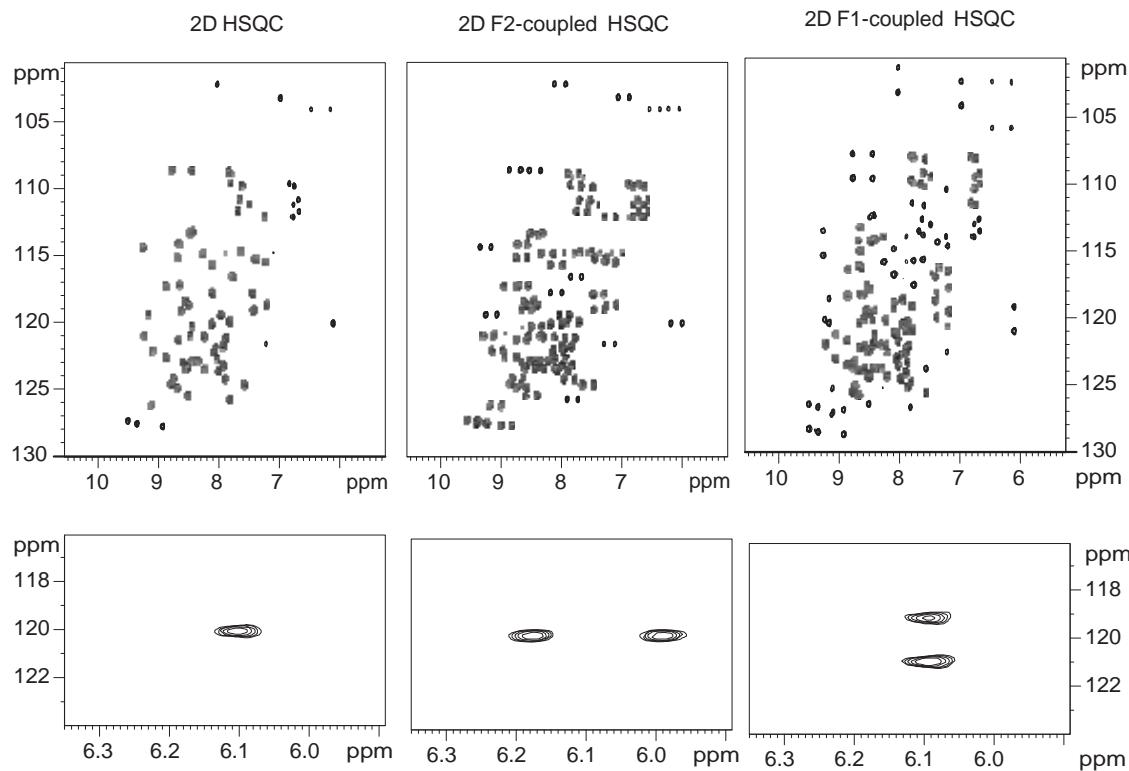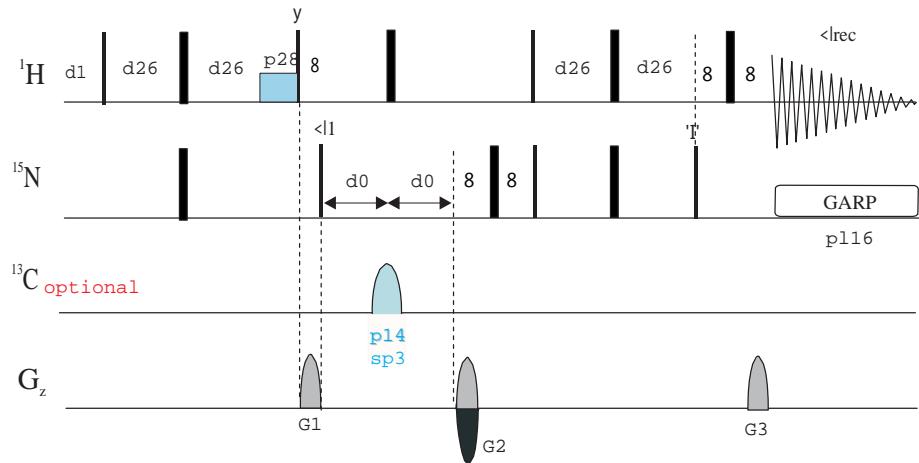


hsqcf3gpiaphsiwg

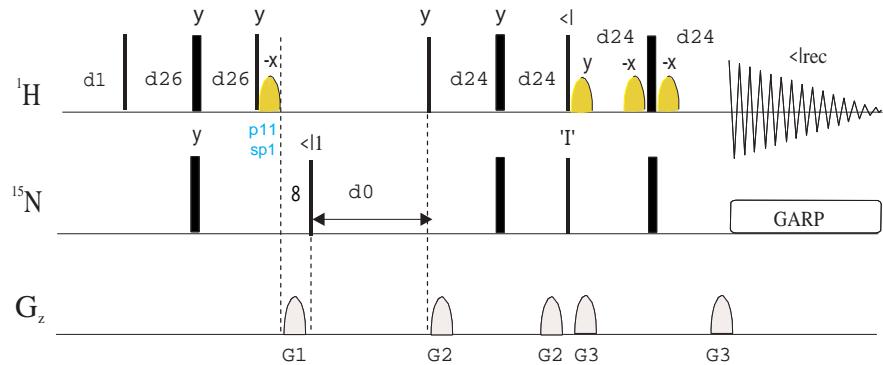

hsqcf3gpiaphwg

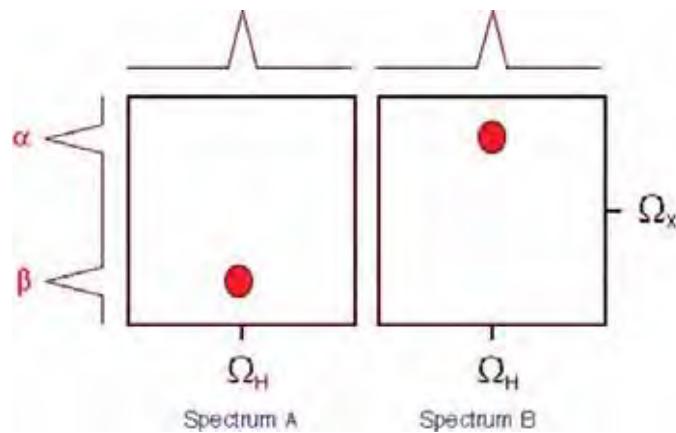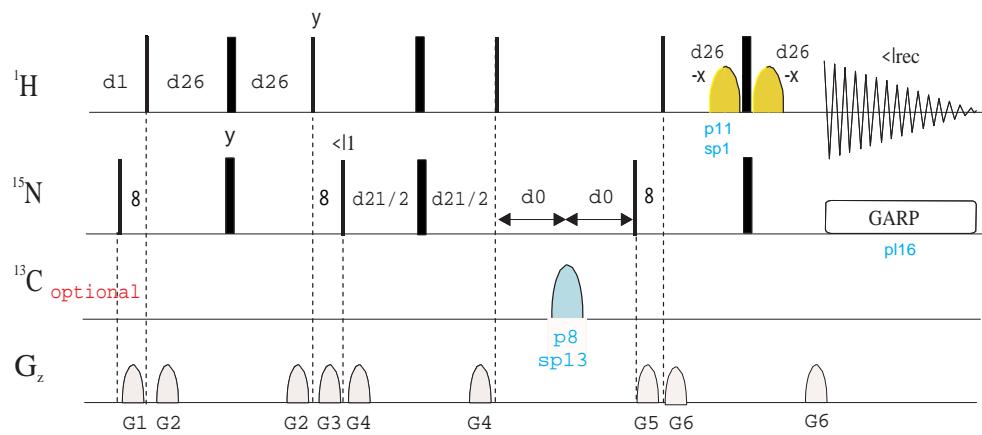

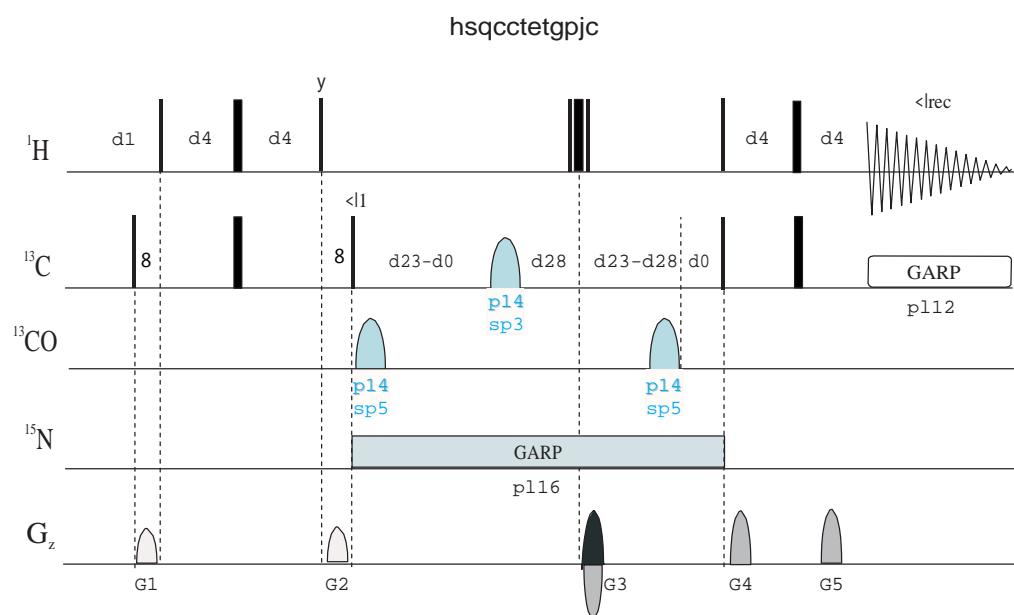

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D TROSY EXPERIMENTS

2D TROSY Experiments

From f2 channel:



Phase-sensitive ge-2D TROSY with presaturation (trosgpphpr)
ge-2D TROSY for aromatic residues with WATERGATE (trosyargpphwg)

From f3 channel:


Phase-sensitive ge-2D ^1H - ^{15}N TROSY

- Using echo-antiecho (troseytf3gpsi | TROSYETF3GPSI)
- Using echo-antiecho and different phase cycling (troseytf3gpsi2)
- Using echo-antiecho and different phase cycling to give IPAP TROSY (troseytf3gpiasi)
- Using WATERGATE (3-9-19) (trosyf3gpph19 | TROSYF3GPPH19)
- Using WATERGATE and improved sensitivity (trosyf3gpphs19 | TROSYF3GPPHS19)


Phase-sensitive ge-2D ^1H - ^{15}N ZQ-TROSY using WATERGATE (troszqgpphwg)

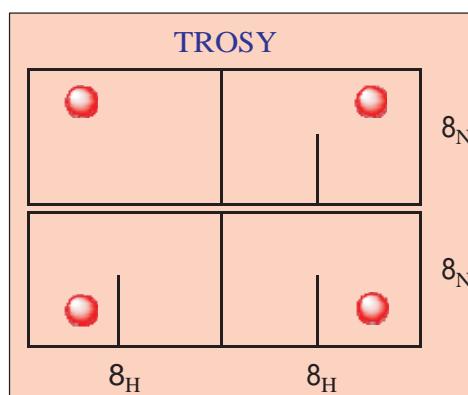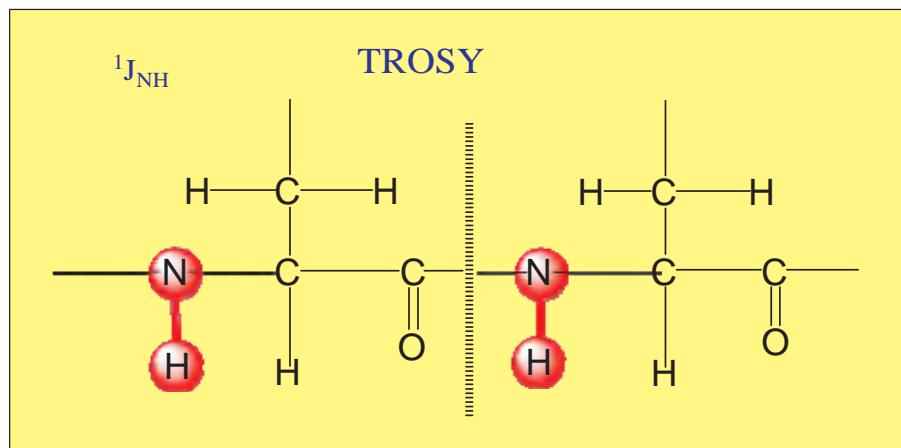


troSYF3gpph19


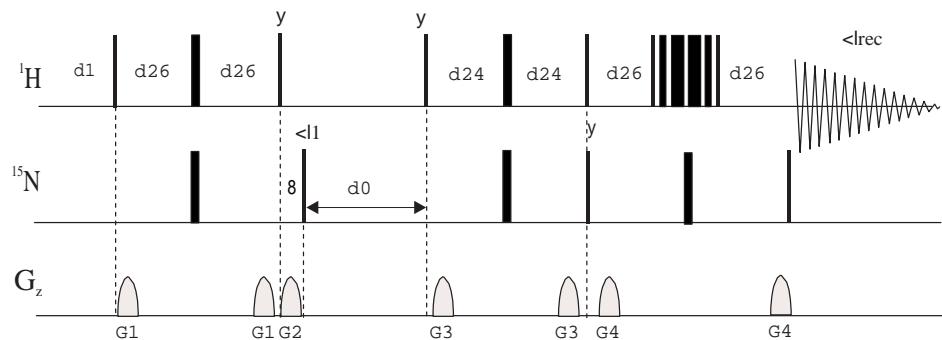


troSYF3gpphs19

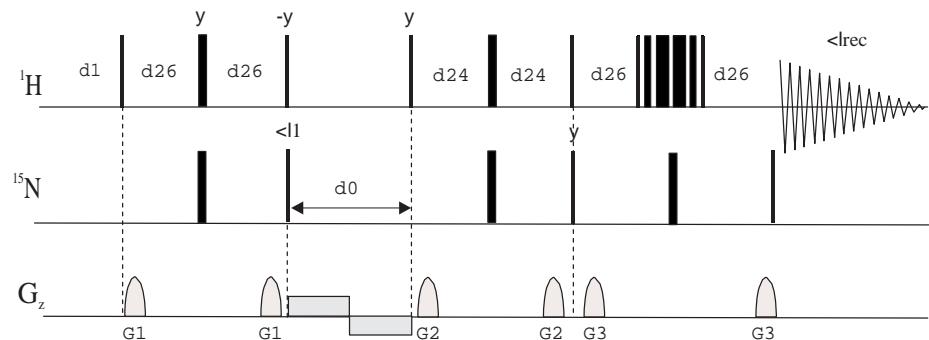


troSYF3gpphs19.2

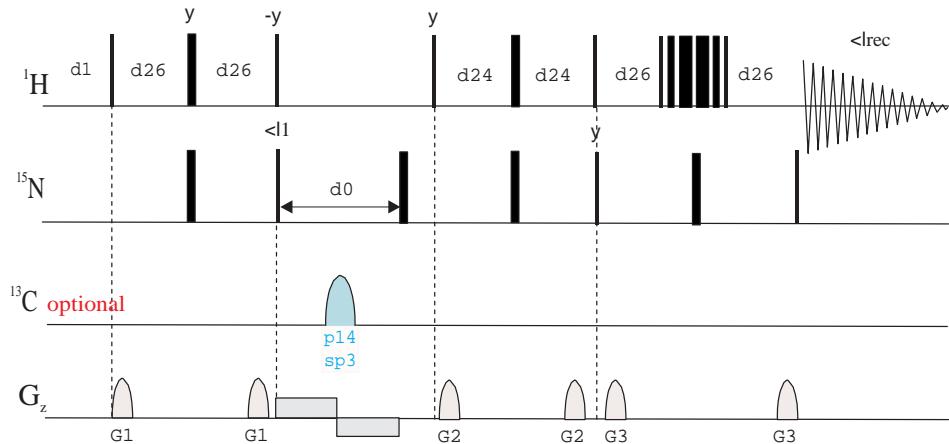



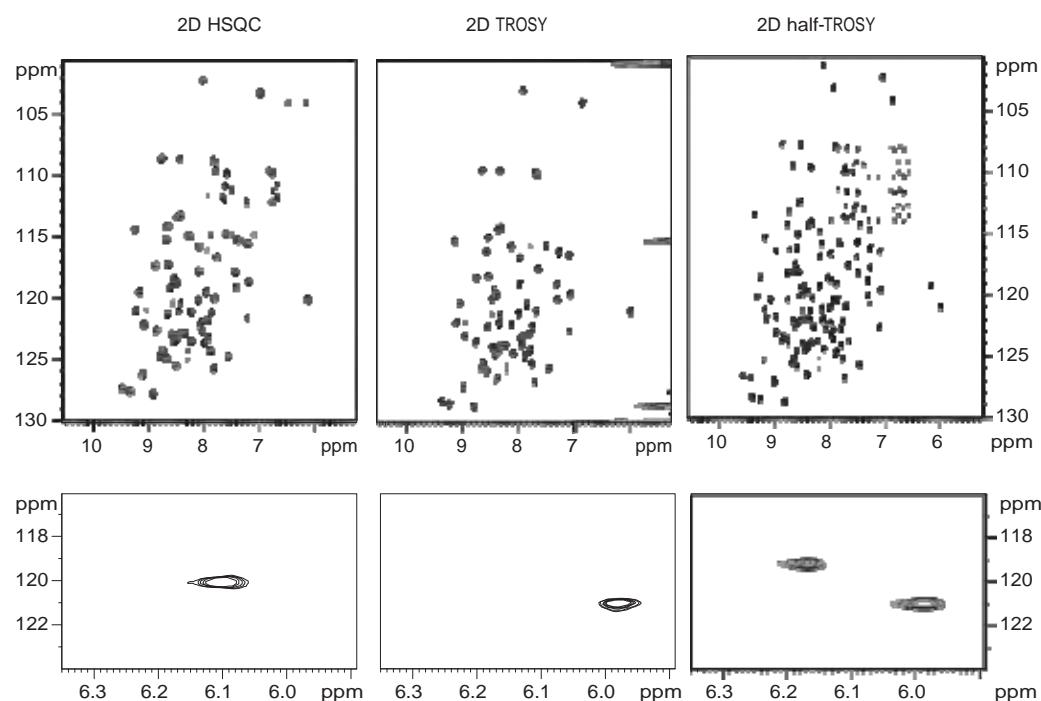
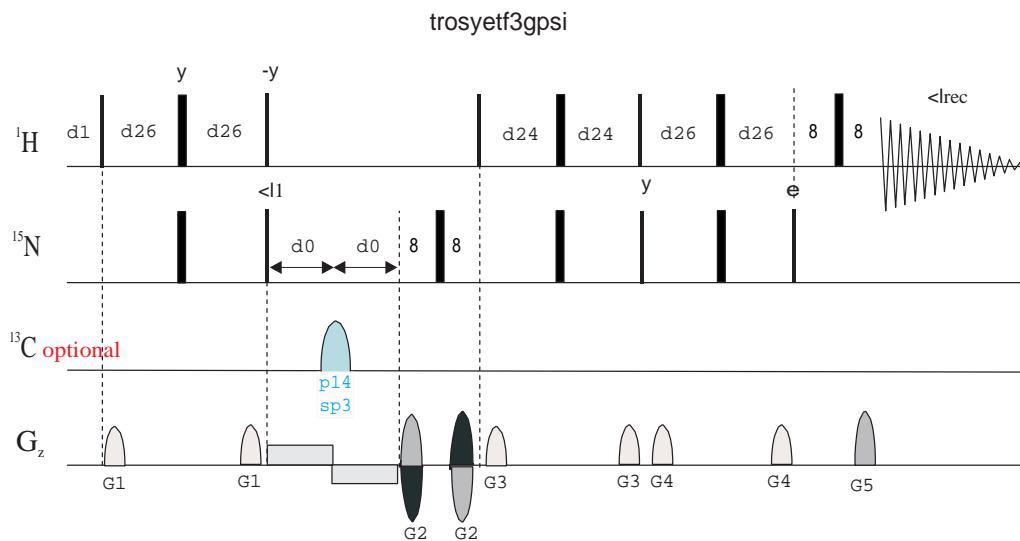


troseytf3gpsi2

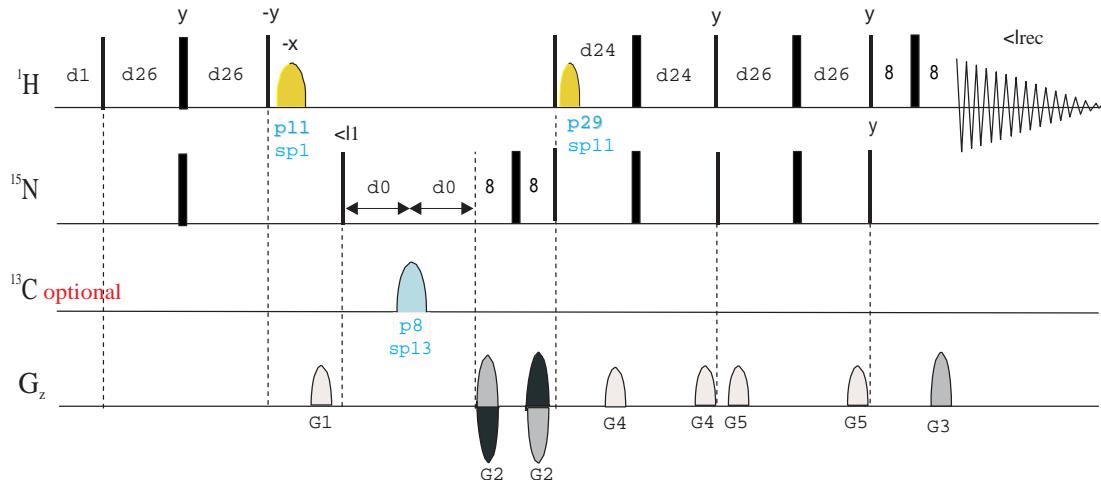

troseytf3gpiasi

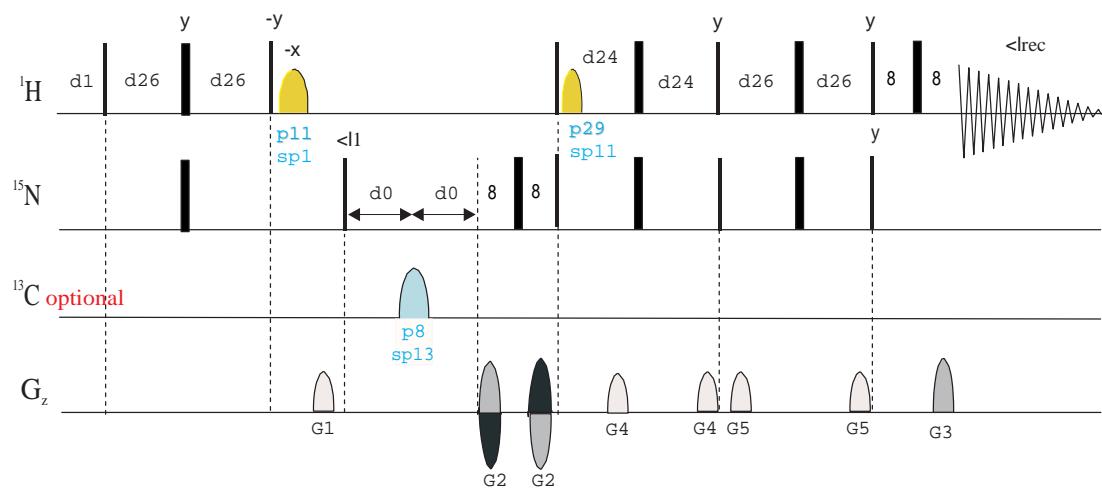

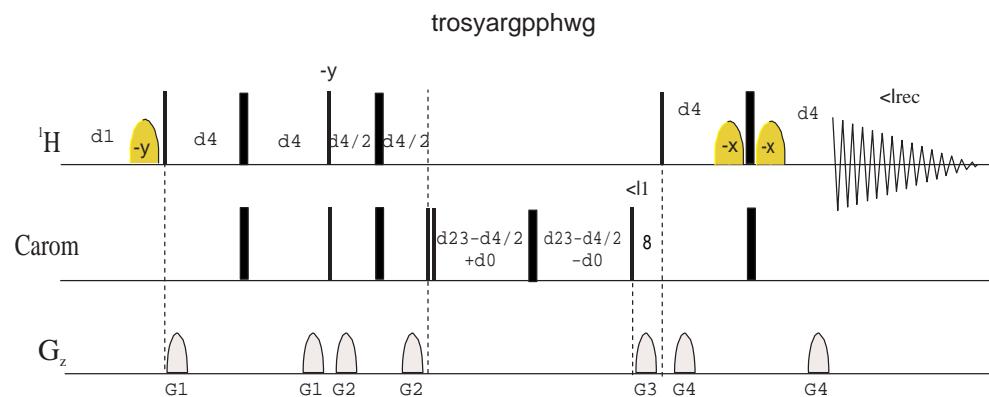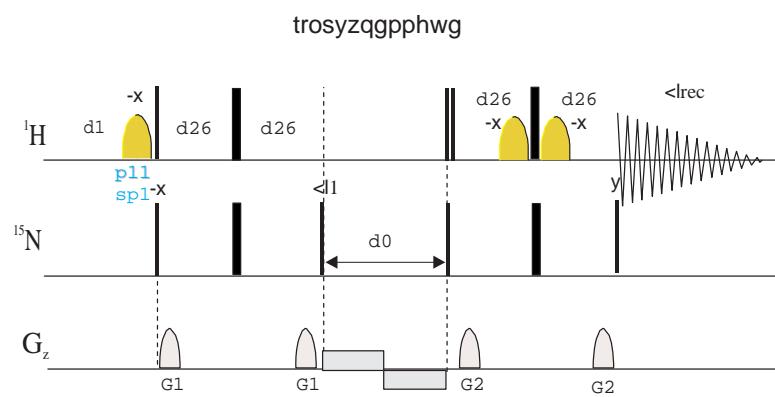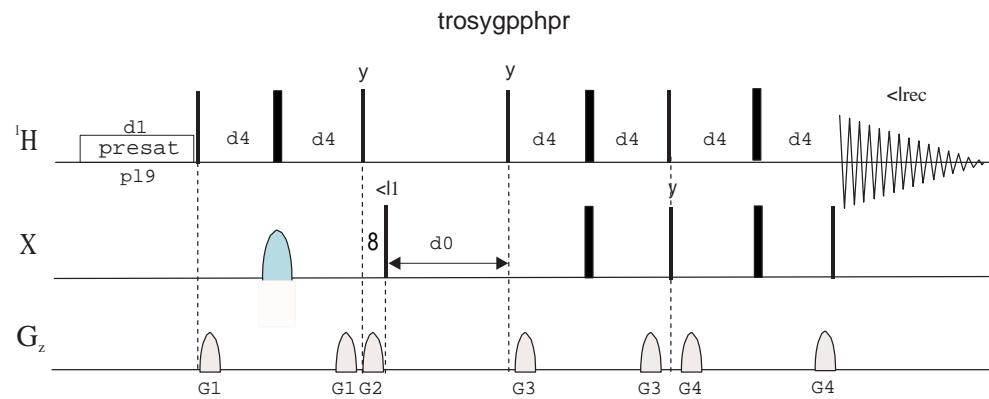


BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D CRI NEPT EXPERIMENT

ge-2D ^1H - ^{15}N CRINEPT using flip-back (crineptgpph)

crineptgpph

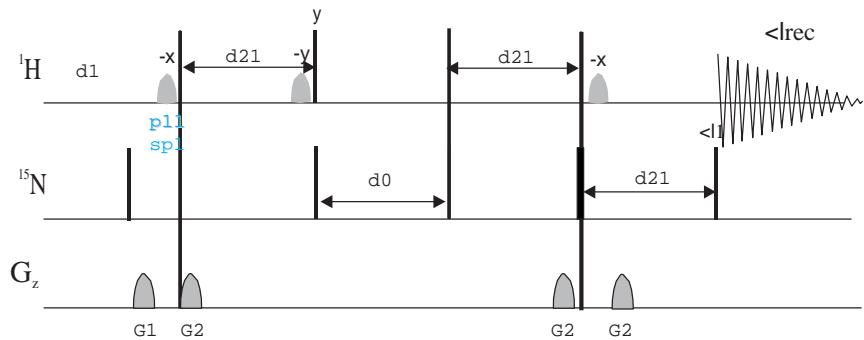

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HMQC-COSY EXPERIMENTS

2D HMQC-COSY Experiments



Phase cycled:




Magnitude-mode 2D HMQC-COSY using BIRD (hmqcbindqfrl)
Phase-sensitive 2D HMQC-COSY using BIRD with decoupling (hmqcbiphrl)
Phase-sensitive 2D HMQC-COSY using BIRD without decoupling (hmqcbindphrl)
Phase-sensitive 2D HMQC-COSY-DQF using BIRD (hmqcbidfpfrl)


Gradient-enhanced:

Magnitude-mode ge-2D HMQC-COSY (hmqcgpqfrl)
H2BC experiment with a three-low-pass filter (h2bcetgpl3)

Also see HMQC and HMQC-TOCSY experiments

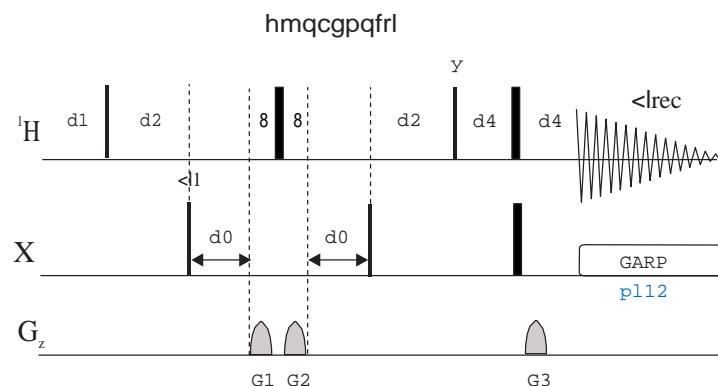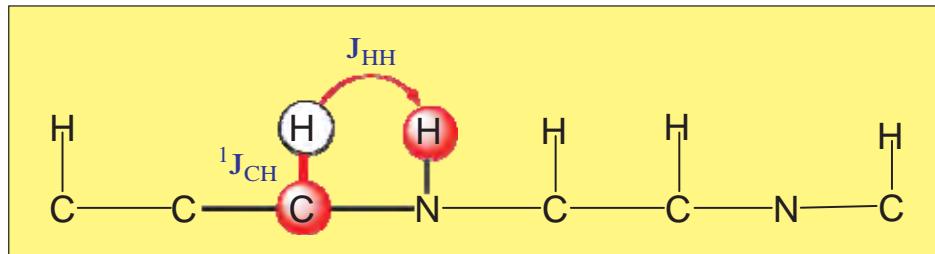

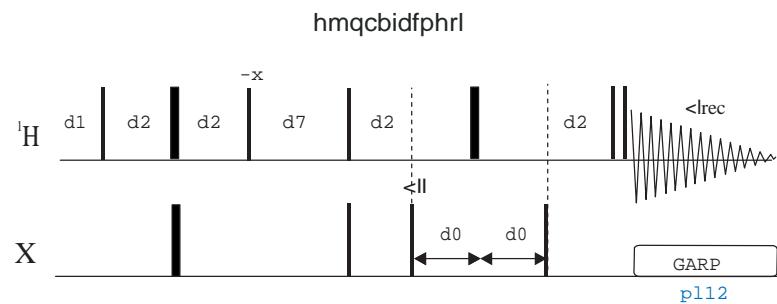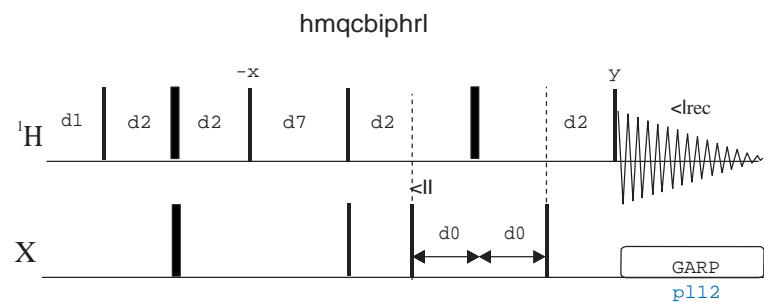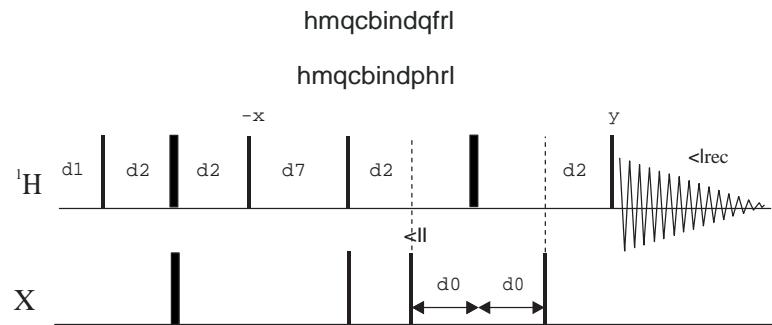

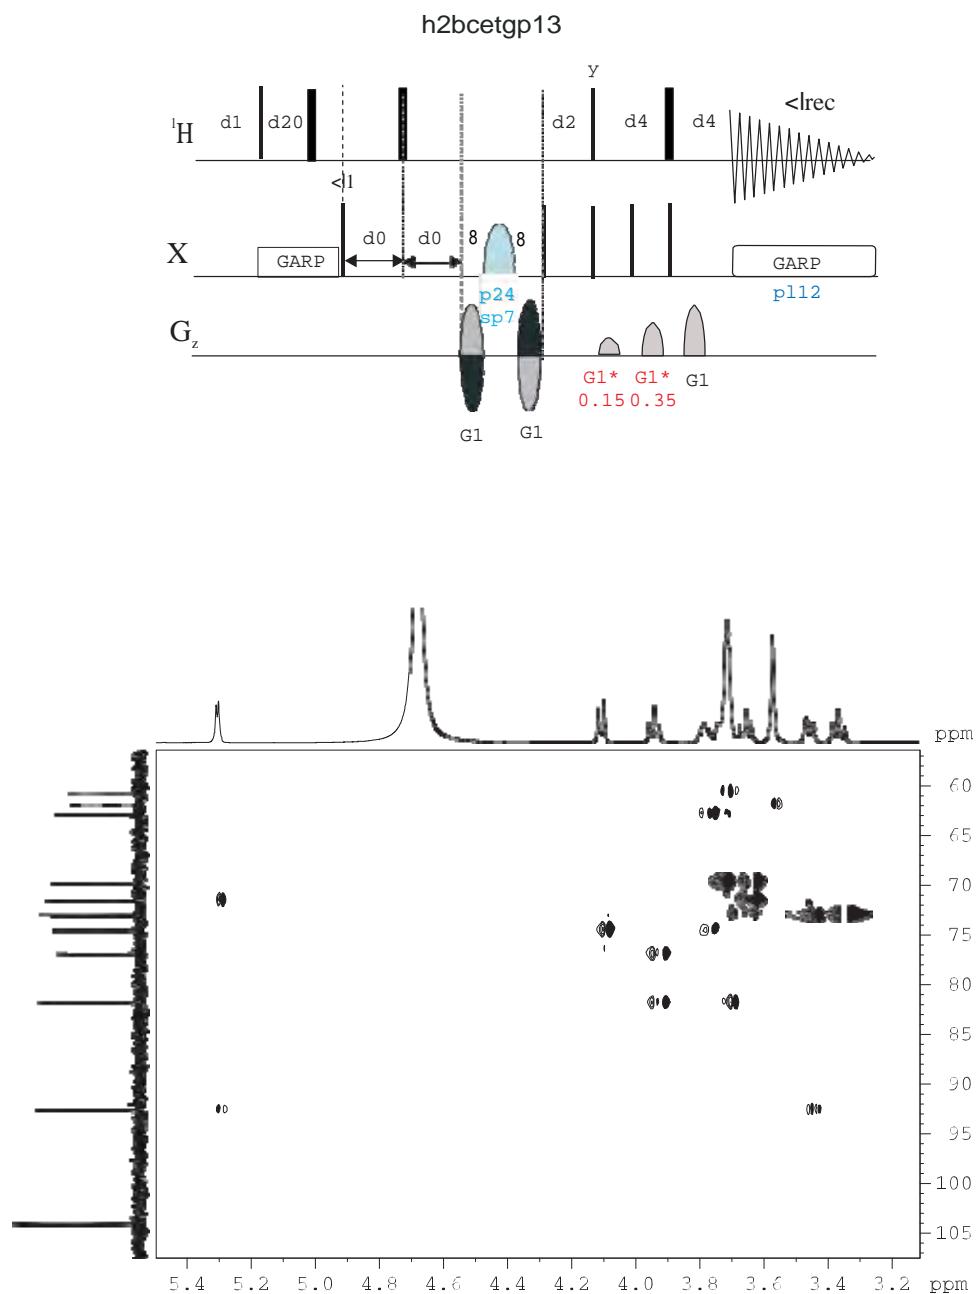

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HMQC-TOCSY EXPERIMENTS

- Phase-cycled:

Phase-sensitive 2D HMQC-TOCSY (hmqcmlph)
Phase-sensitive 2D HMQC-TOCSY without decoupling (hmqcmlndph)
Magnitude-mode 2D HMQC-TOCSY using BIRD (hmqcbimlqf)
Magnitude-mode 2D HMQC-TOCSY using BIRD without decoupling
(hmqcbimlndqf)

Phase-sensitive 2D HMQC-TOCSY using BIRD (hmqcbimlph)
Phase-sensitive 2D HMQC-TOCSY using BIRD without decoupling
(hmqcbimlndph)

- Phase-cycled and solvent suppression:

Phase-sensitive 2D HMQC-TOCSY with presaturation (hmqcmlphpr)
Phase-sensitive 2D HMQC-TOCSY with presaturation and without decoupling
(hmqcmlndphpr)


- Gradient-enhanced from f2 channel:

Magnitude-mode ge-2D HMQC-TOCSY with MLEV (hmqcgpmlqf | HMQCGPML)
Phase-sensitive ge-2D HMQC-TOCSY with DIPSI-2 using echo-antiecho (hmqcdietgp)
Phase-sensitive ge-2D HMQC-TOCSY with DIPSI-2 using PEP (hmqcdietgpsi)
Phase-sensitive ge-2D HMQC-TOCSY with DIPSI-2 using PEP using shorter overall timing
(hmqcdietgpsi.2)


- Gradient-enhanced from f3 channel:

Phase sensitive ge-2D ^1H - ^{15}N HMQC-TOCSY with DIPSI-2 using echo-antiecho
(hmqcdietf3gp)
Phase sensitive ge-2D ^1H - ^{15}N HMQC-TOCSY with DIPSI-2 using PEP (hmqcdietf3gpsi)
Phase sensitive ge-2D ^1H - ^{15}N HMQC-TOCSY with DIPSI-2 using PEP and shorter overall
timing (hmqcdietf3gpsi.2)


hmqcmlndph

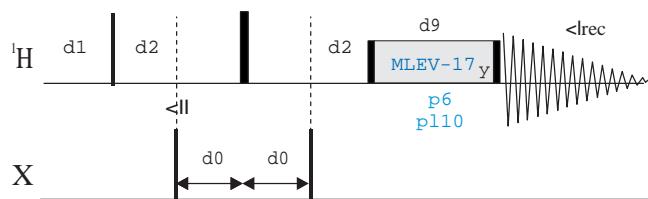


hmqcmlph

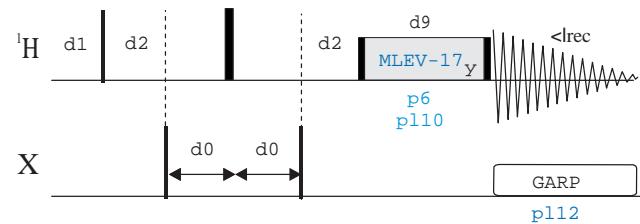

hmqcmlndphpr

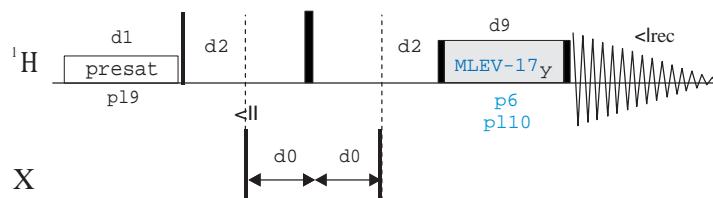


hmqcmlphpr

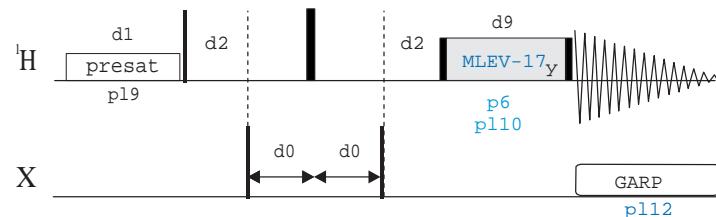


hmqcbimlqf




hmqcbimlph

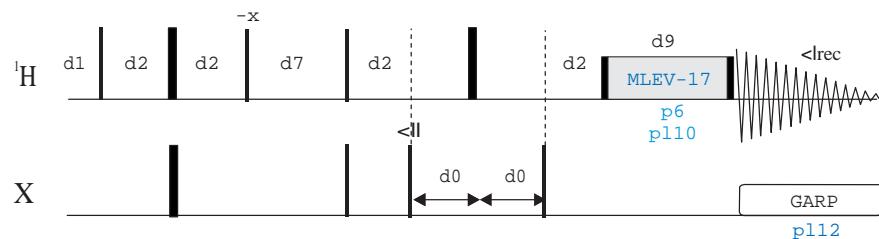


hmqcbimlndqf

hmqcbimlndph

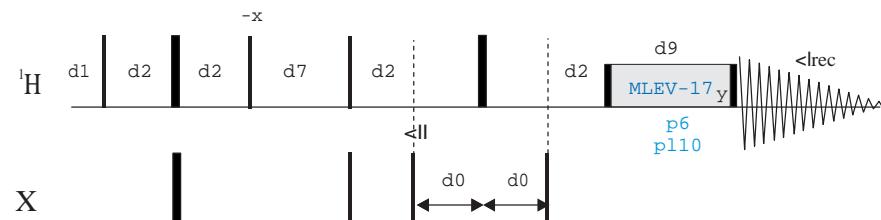


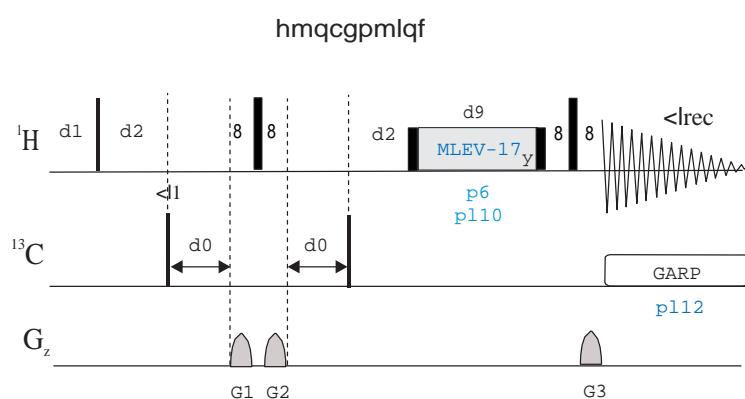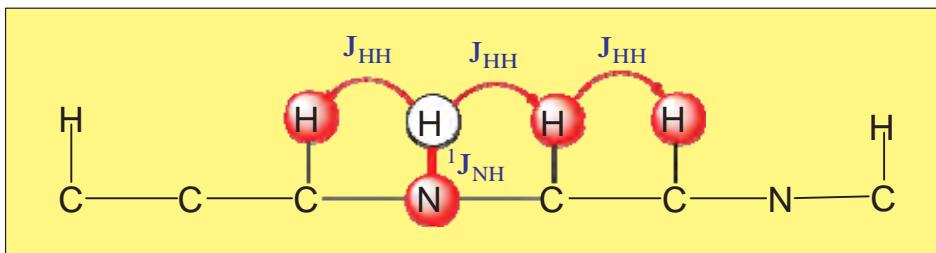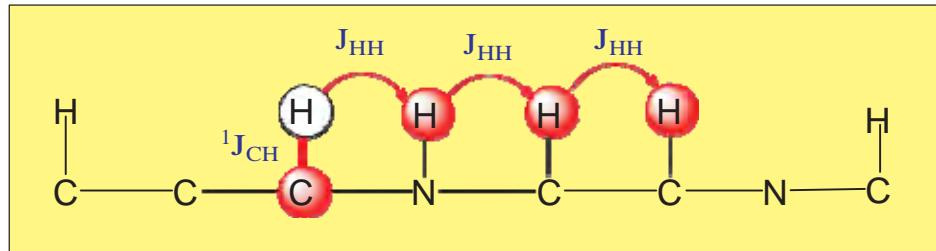


hmqcdietgp

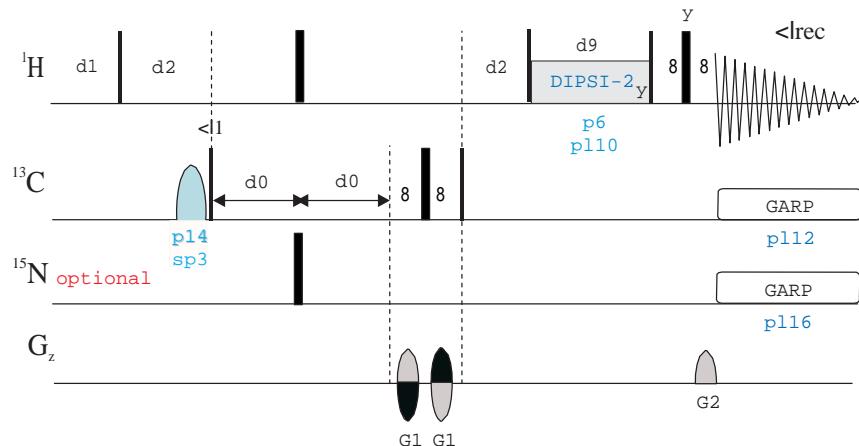


hmqcdietgpsi

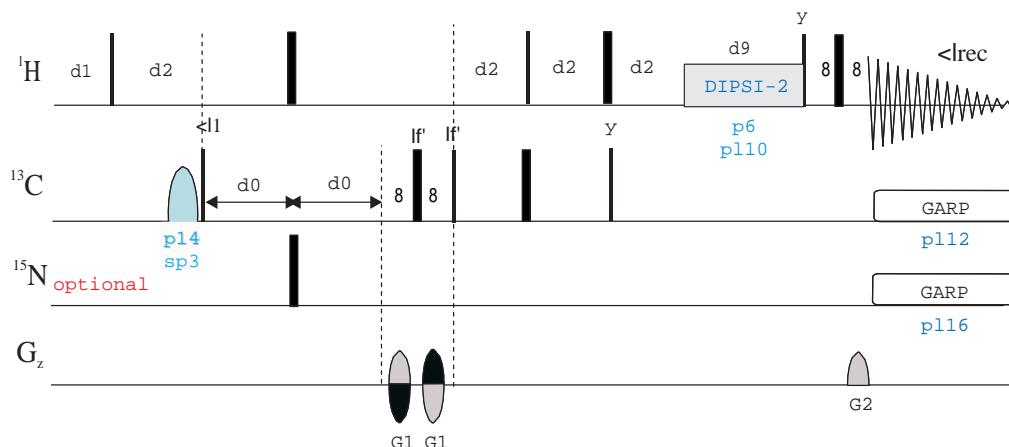


hmqcdietgpsi.2

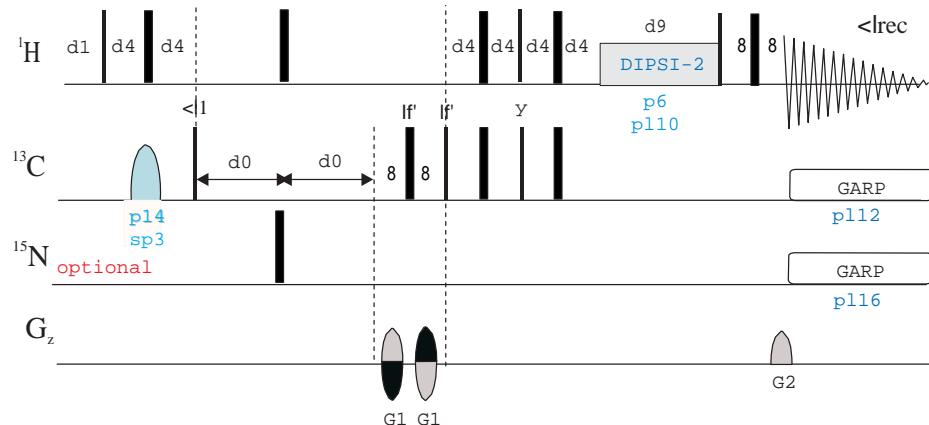


hmqcdietf3gp

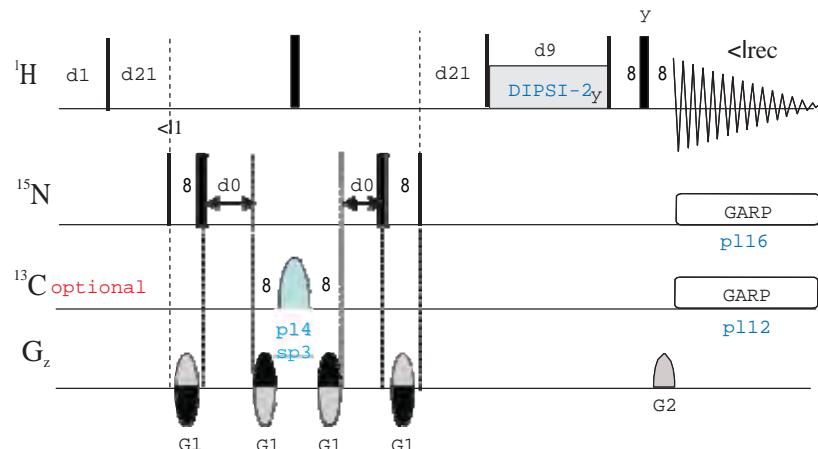

hmqcdietf3gpsi

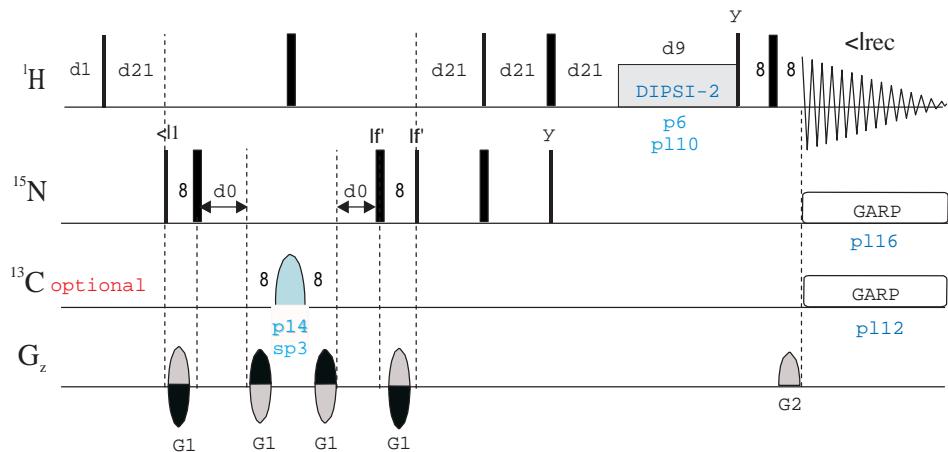

hmqcdietf3gpsi.2

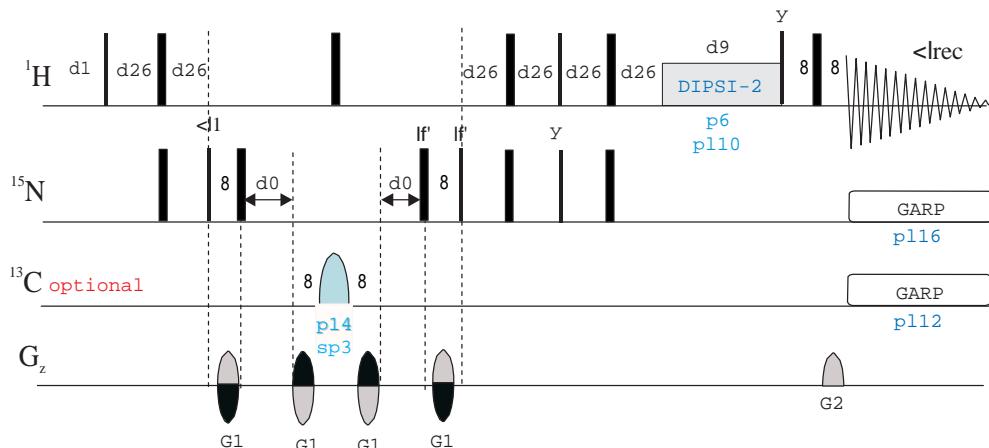

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide


2D HMQC-ROESY EXPERIMENTS

- Gradient-enhanced from the f2 channel


Phase-sensitive ge-2D HMQC-ROESY using echo-antiecho (hmqcetgpro)
Phase-sensitive ge-2D HMQC-ROESY with T-ROESY using echo-antiecho (hmqcetgpro.2)

- Gradient-enhanced from the f3 channel


Phase-sensitive ge-2D ^1H - ^{15}N HMQC-ROESY using echo-antiecho (hmqcetf3gpro)
Phase-sensitive ge-2D ^1H - ^{15}N HMQC-ROESY with T-ROESY using echo-antiecho (hmqcetf3gpro.2)

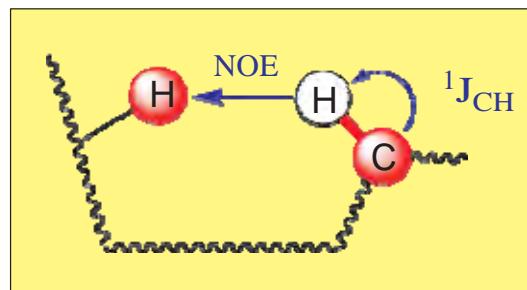


hmqcetgpro

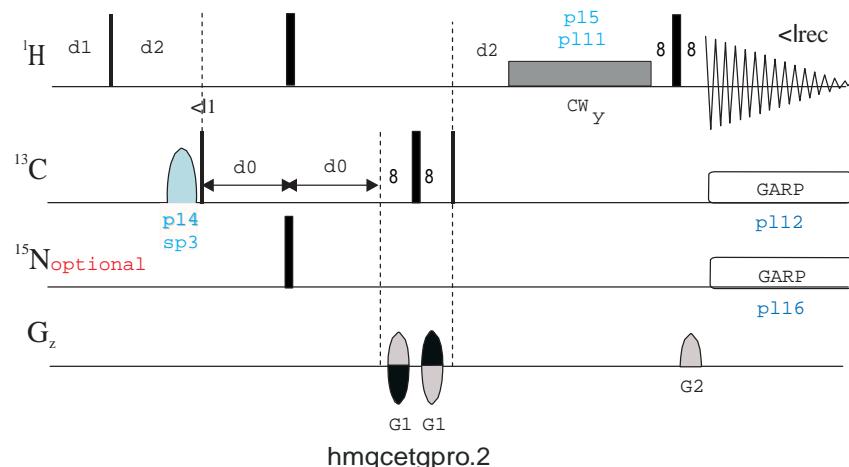


hmqcetgpro.2

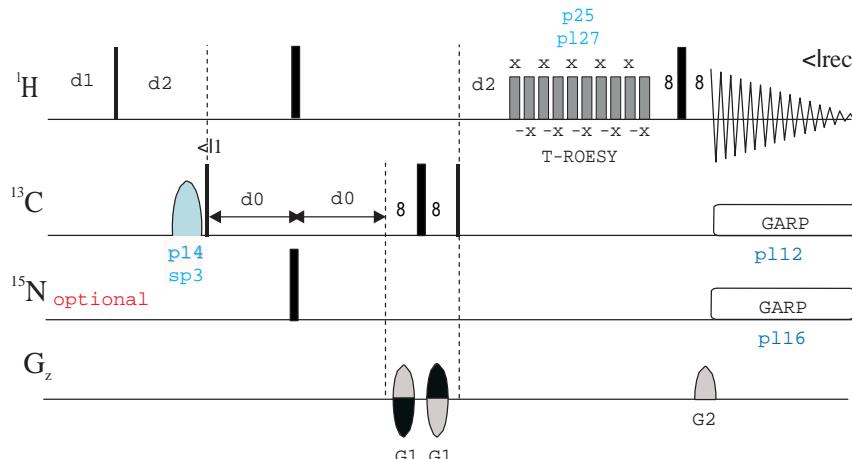


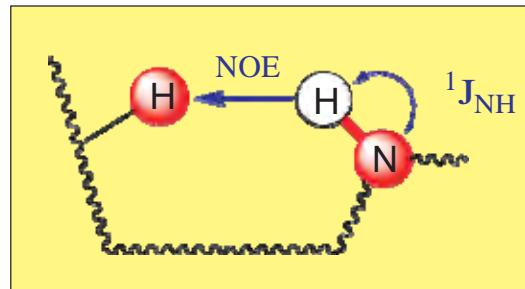

hmqcetf3gpro

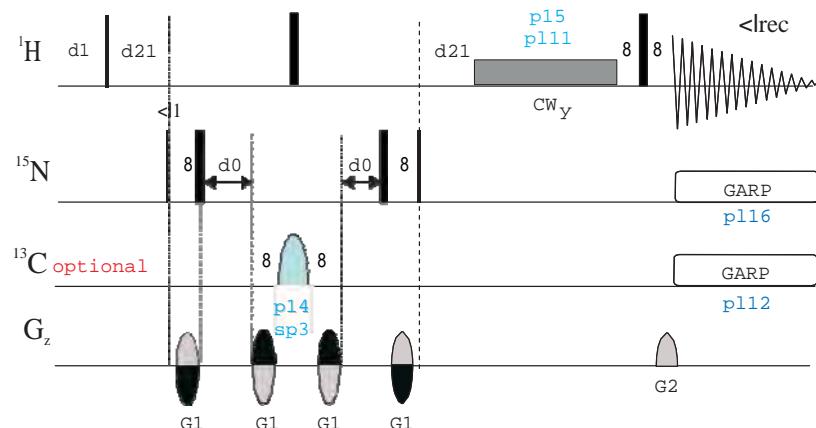

hmqcetf3gpro.2

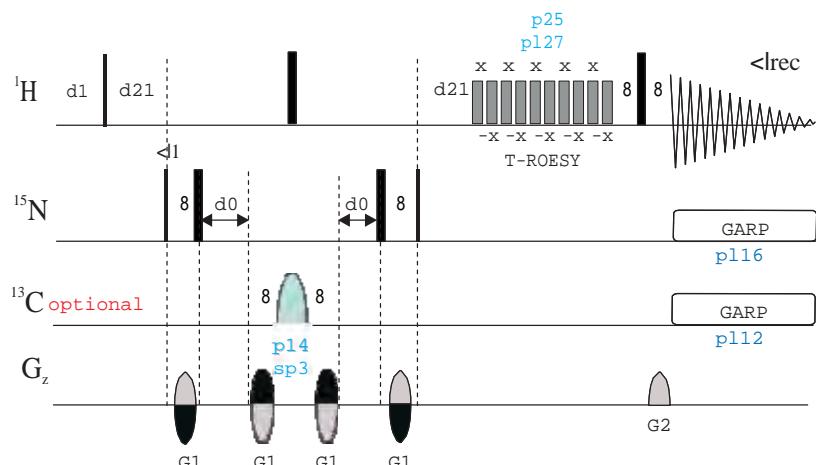

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HMQC-NOESY EXPERIMENTS

- Phase cycled:


Phase-sensitive 2D HMQC-NOESY with presaturation (hmqcnophpr)
Phase-sensitive 2D HMQC-NOESY using BIRD (hmqcbinoph)

- Gradient-enhanced from the f2 channel:


Phase-sensitive ge-2D HMQC-NOESY using echo-antiecho (hmqcetgno)

- Gradient-enhanced from the f3 channel:


Phase-sensitive ge-2D ^1H - ^{15}N HMQC-NOESY using echo-antiecho (hmqcetf3gno)

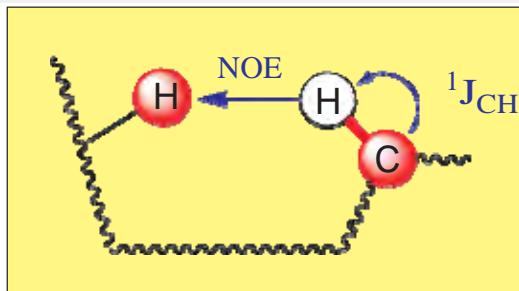


hmqcnophpr

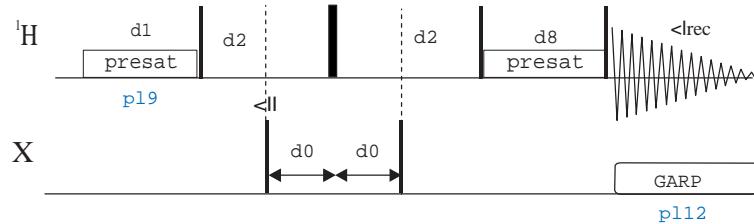


hmqcbnoph

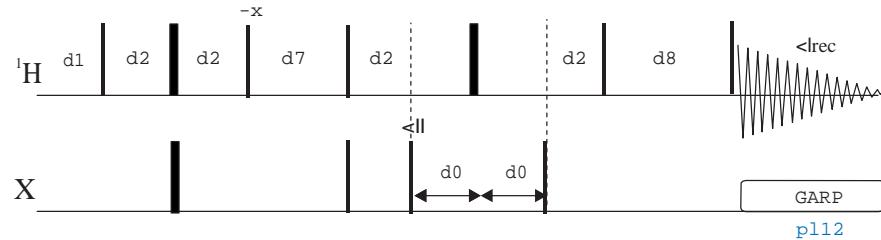


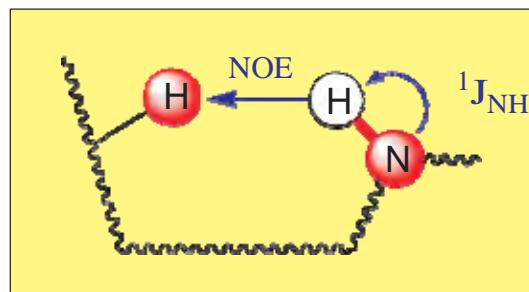

hmqcetgpno

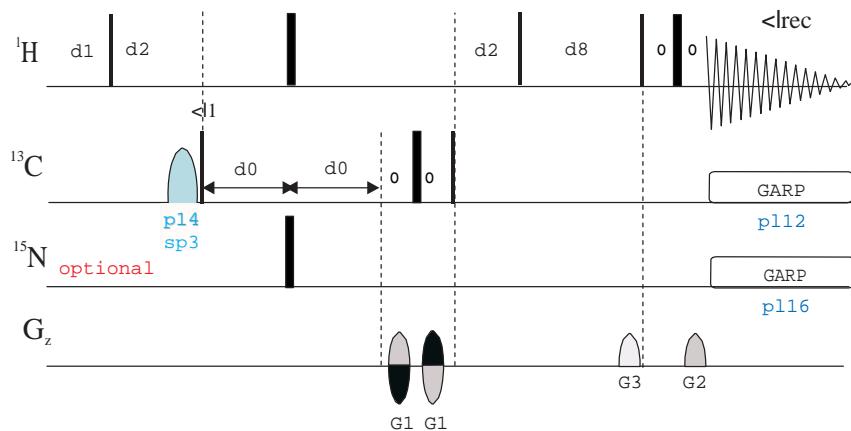

hmqcetf3gpno

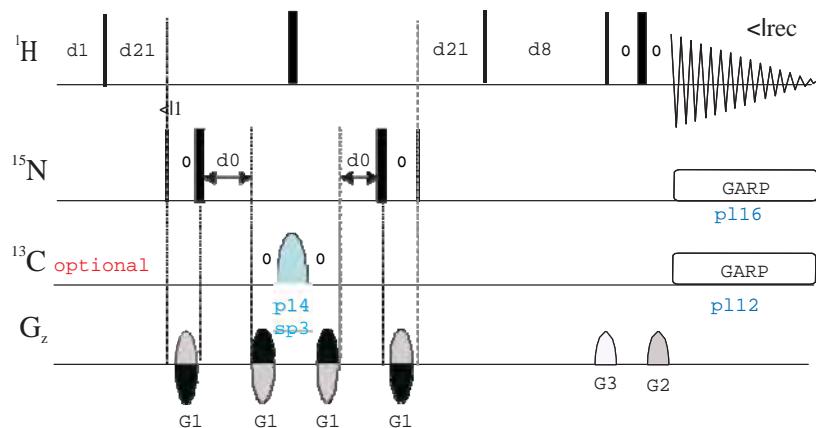

BRUKER
PULSE PROGRAM
CATALOGUE

NMRGuide

2D HSQC-TOCSY EXPERIMENTS

Gradient-enhanced from the f2 channel

Phase sensitive ge-2D HSQC-TOCSY with MLEV using z-filter (hsqcgpmplph | HSQCGPMLPH)
Phase-sensitive ge-2D HSQC-TOCSY with MLEV using echo-antiecho (hsqcetgpml | HSQCETGPML)
Phase-sensitive ge-2D HSQC-TOCSY with DIPSI-2 using PEP (hsqdietgpsi)
Phase-sensitive ge-2D HSQC-TOCSY with DIPSI-2 using PEP and adiabatic inversion pulses (hsqdietgpsisp | HSQDIETGPSISP)
Phase-sensitive ge-2D HSQC-TOCSY with DIPSI-2 using PEP and adiabatic inversion and refocusing pulses (hsqdietgpsisp.2)


Gradient-enhanced with editing from the f2 channel


Phase sensitive ge-2D HSQC-TOCSY using PEP with editing of multiplicity (hsqcdiedetgpsisp.1)
Phase sensitive ge-2D HSQC-TOCSY using PEP with editing of direct responses (hsqediedetgpsisp.2)
Phase sensitive ge-2D HSQC-TOCSY using PEP with editing of multiplicity and direct responses (hsqcdiedetgpsisp.3)

Gradient-enhanced from the f3 channel


Phase sensitive ge-2D ^1H - ^{15}N HSQC-TOCSY with MLEV using echo-antiecho (hsqcetf3gpml)
Phase sensitive ge-2D ^1H - ^{15}N HSQC-TOCSY with DIPSI-2 using PEP (hsqdietf3gpsi | HSQDIETF3GPSI)

Also see HSQC-TOCSY type experiments for $^n\text{J}_{\text{CH}}$ measurements

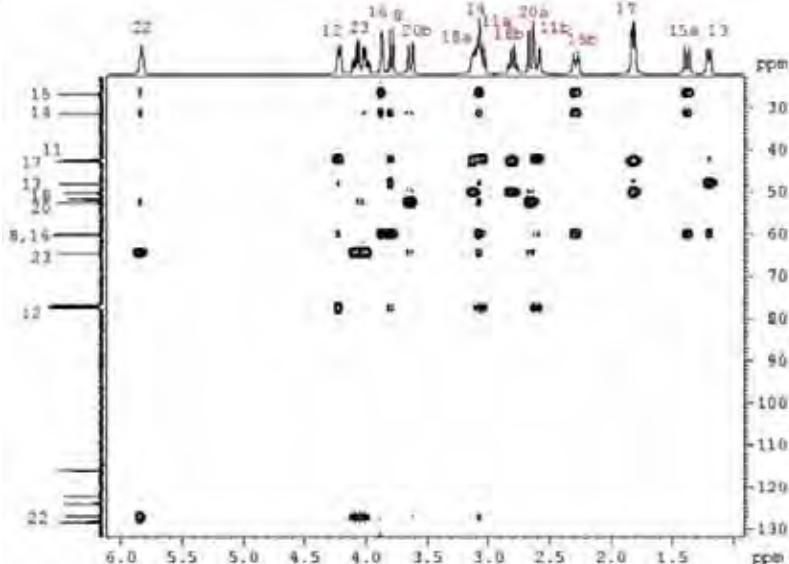



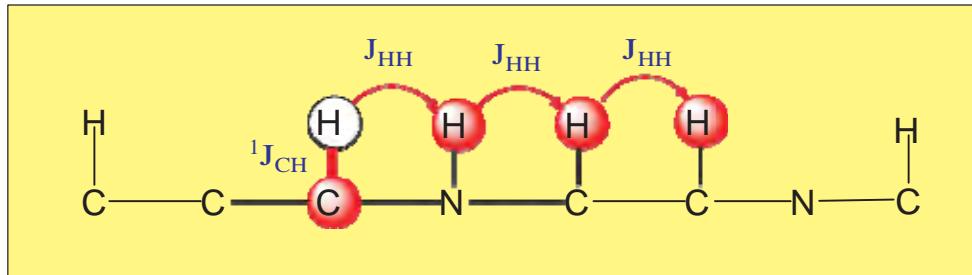




hsqcgpmplph

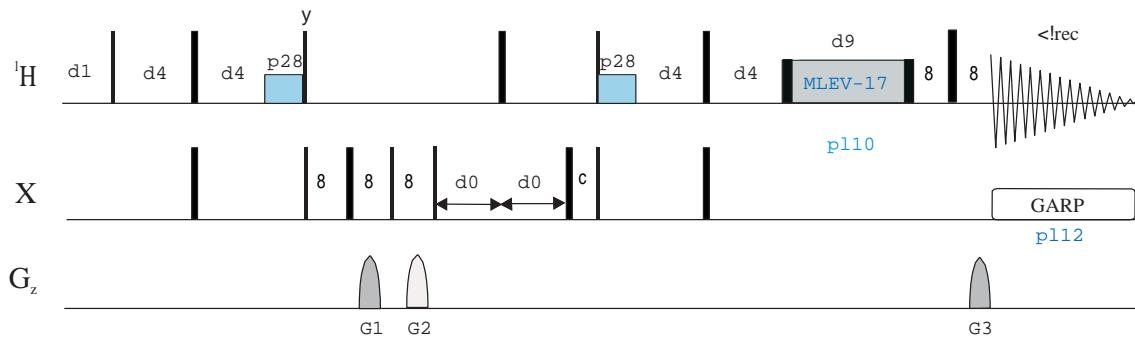


hsqcetgpml

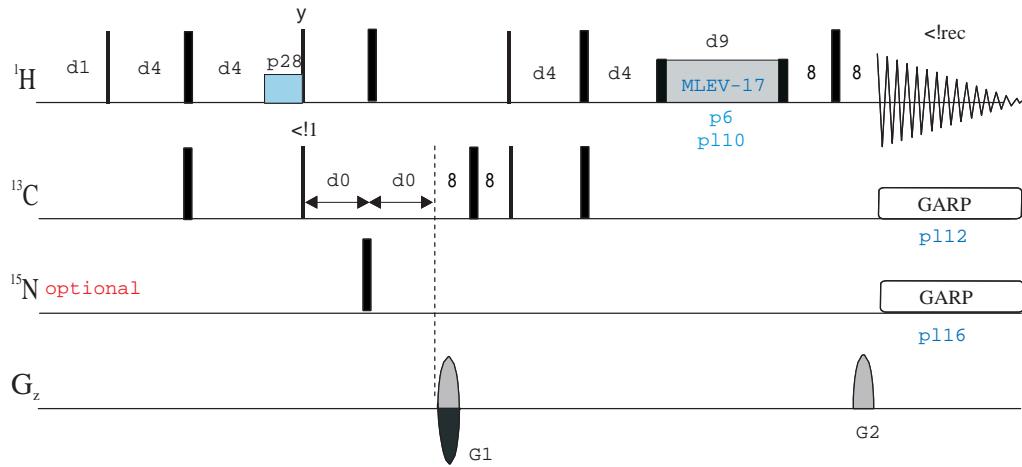

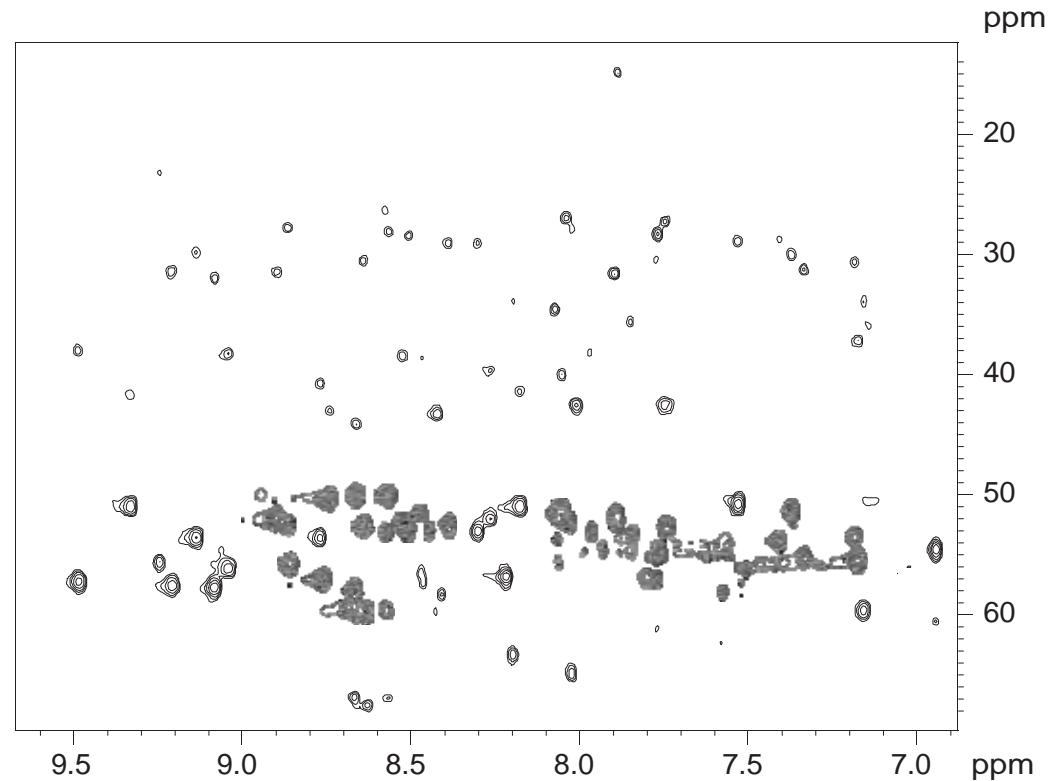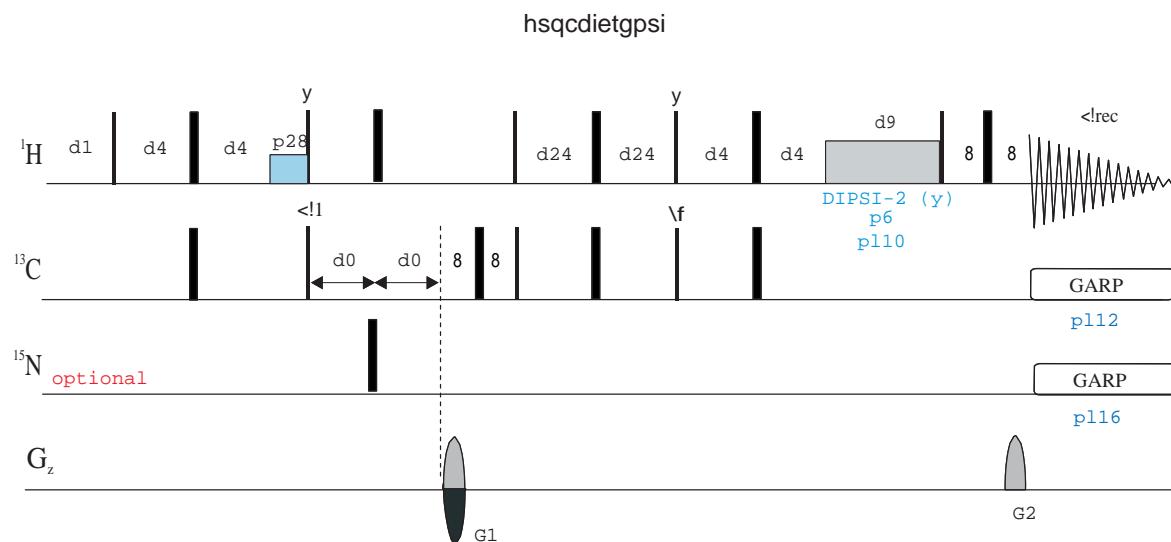


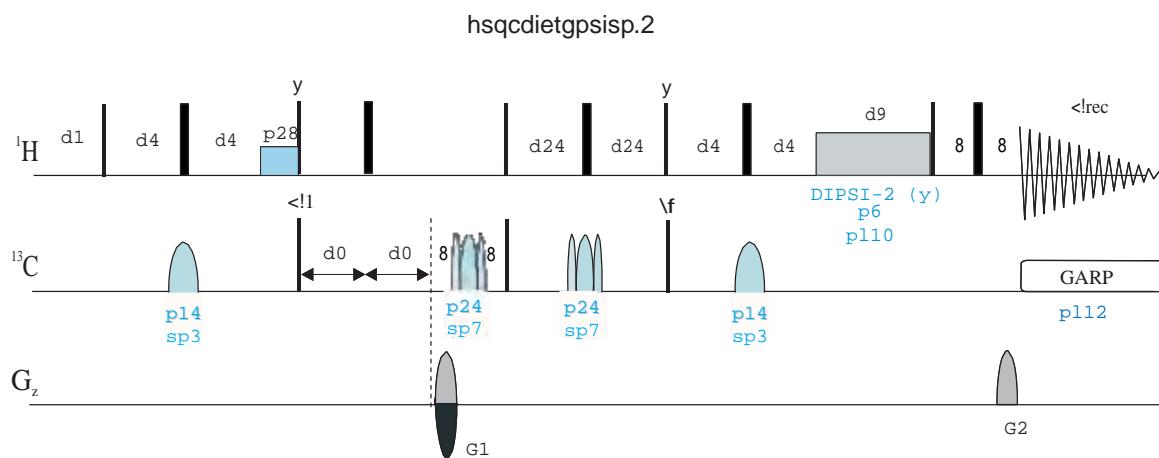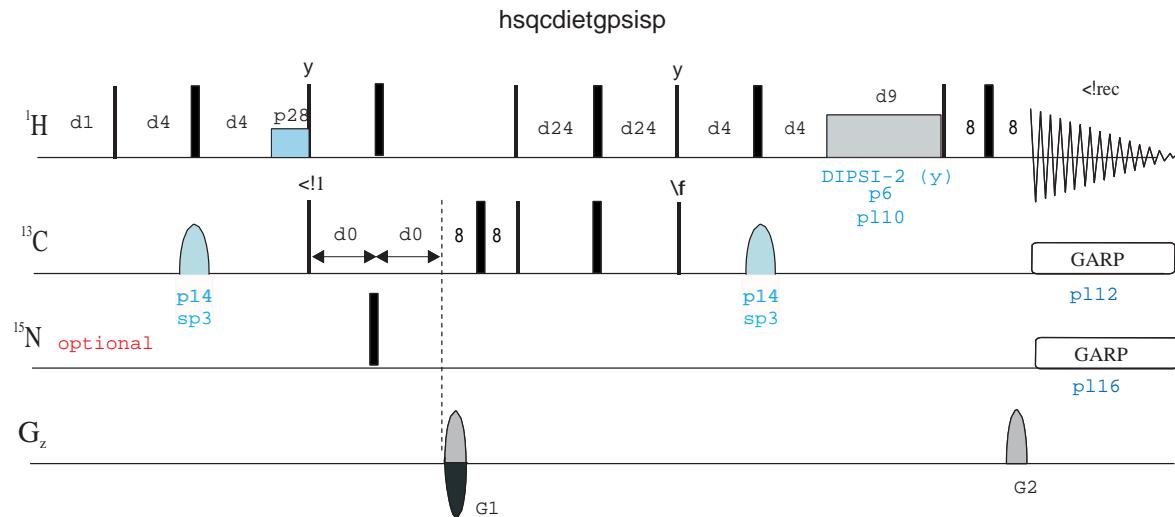


hsqcdiedetgpsisp.1


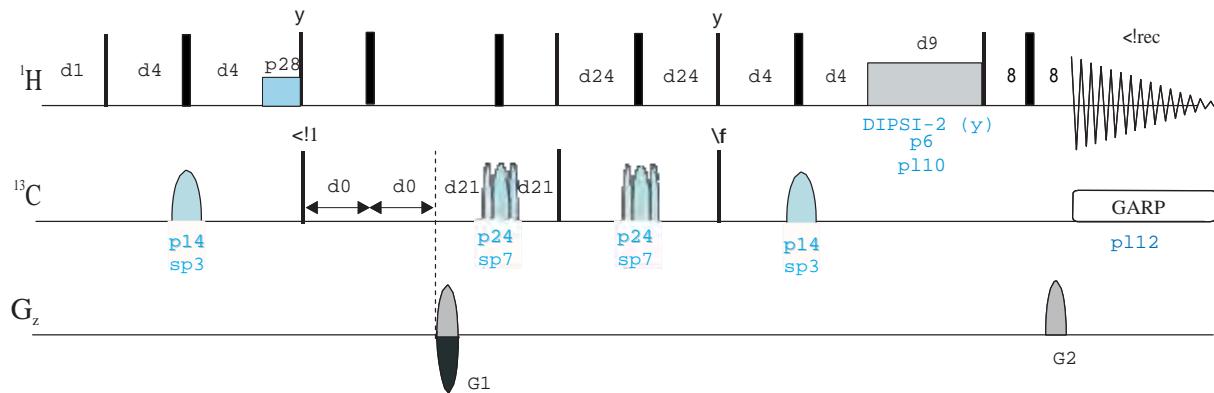


hsqcdiedetgpsisp.2

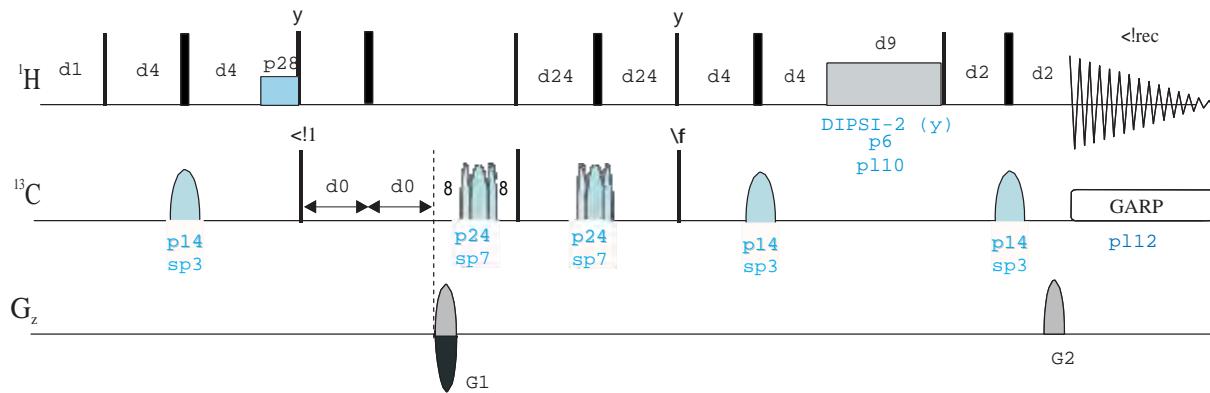

hsqcdiedetgpsisp.3

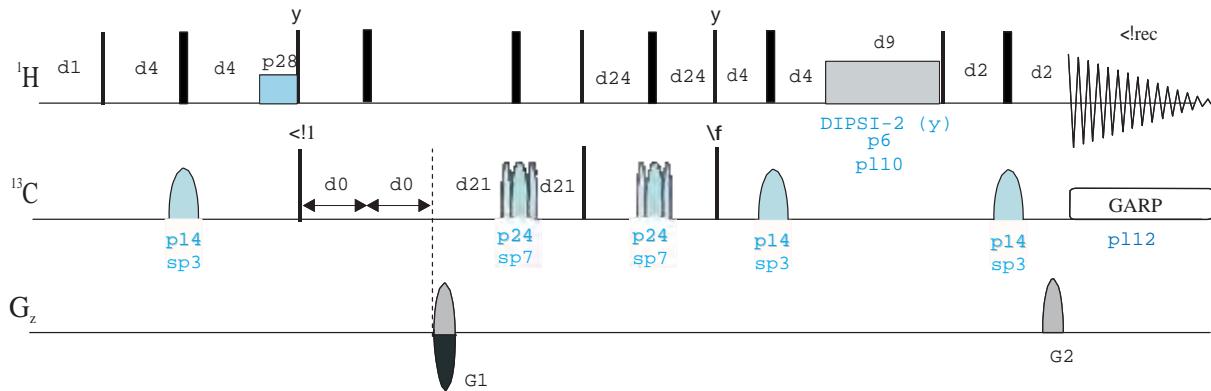

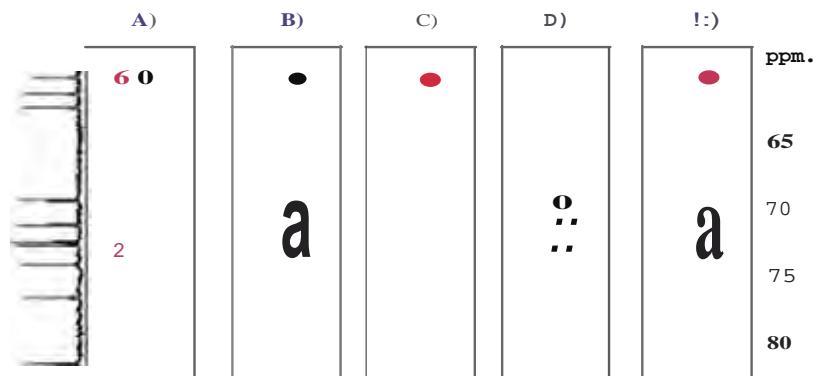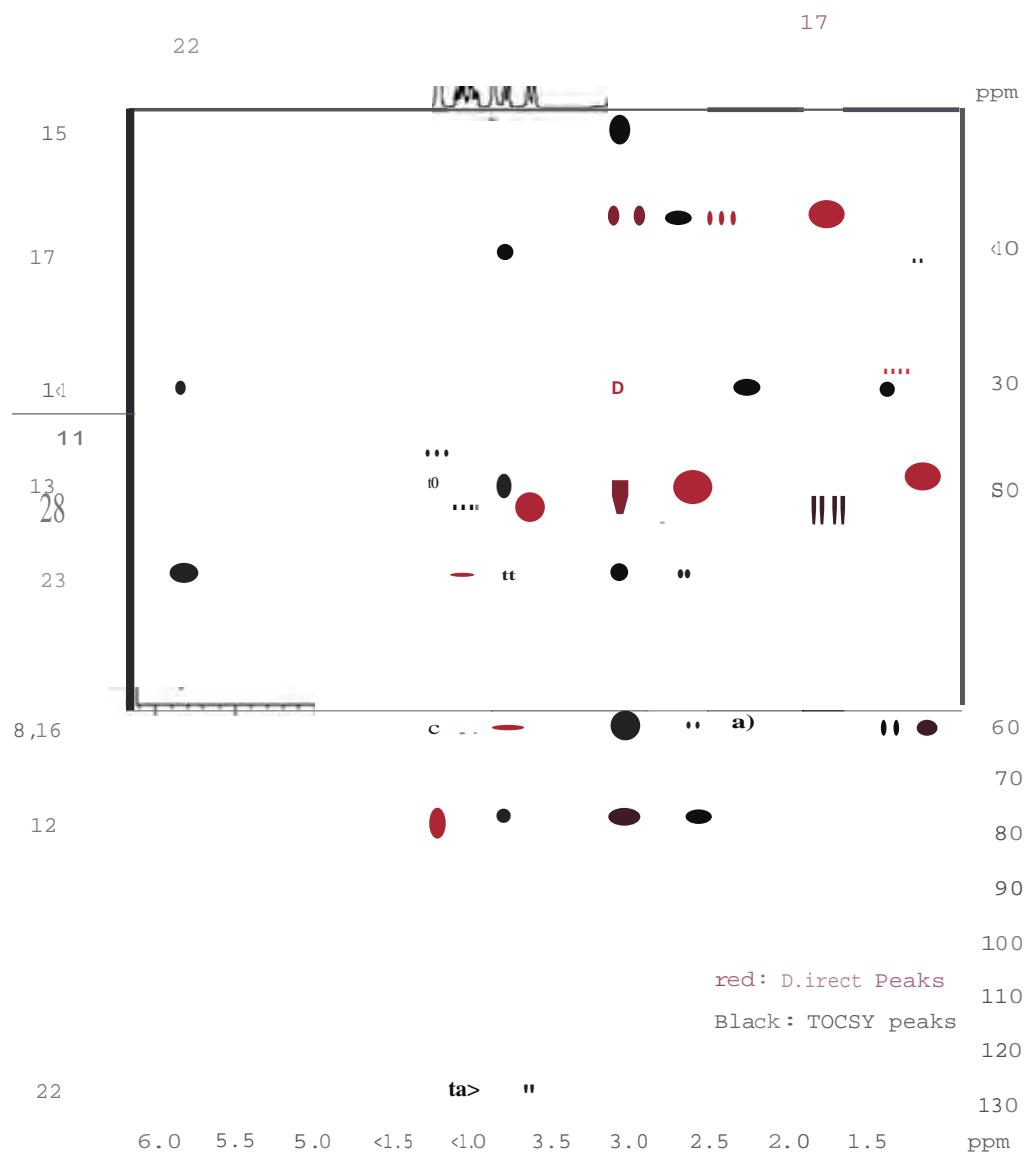


85

90


1

9


—

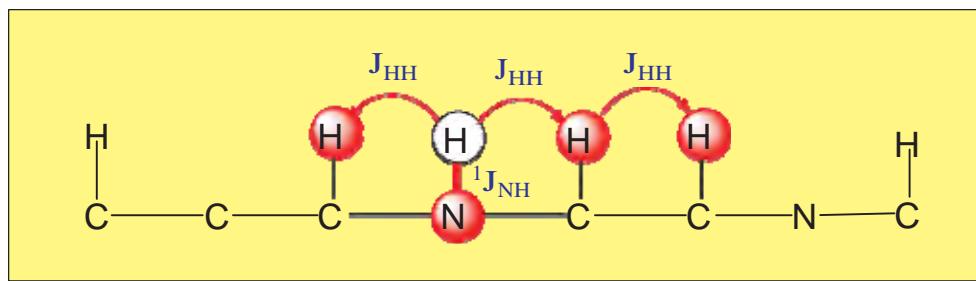

hsqcetf3gpml

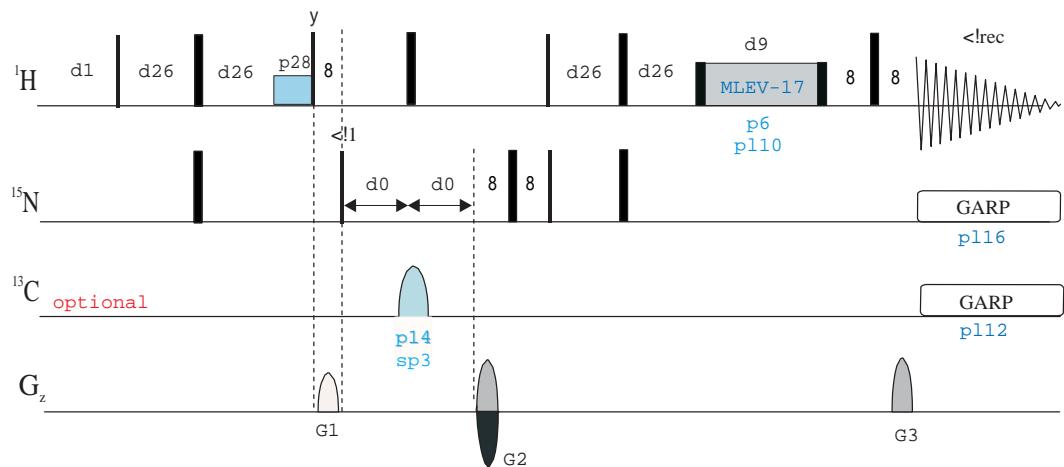

hsqcdietf3gpsi

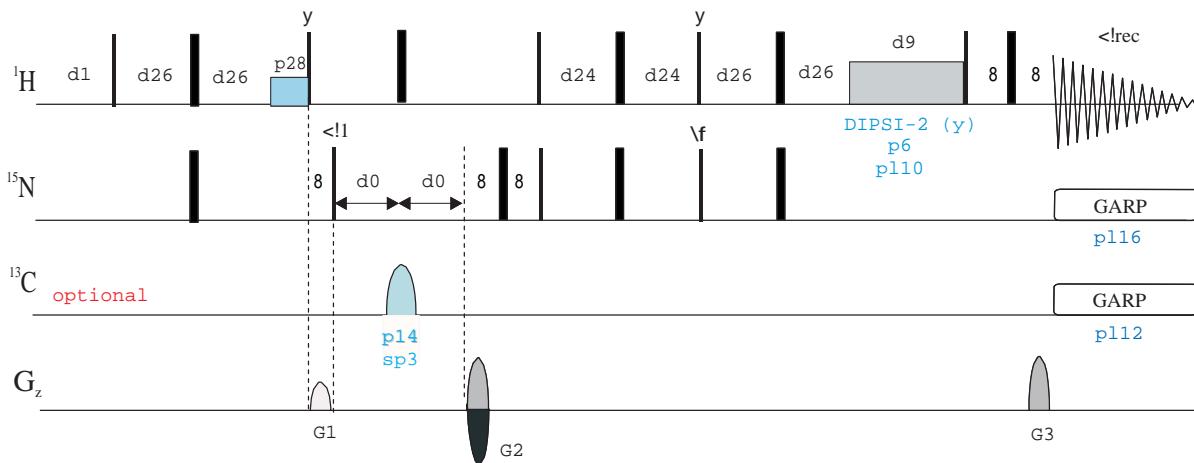

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HSQC-ROESY EXPERIMENTS

- Gradient-enhanced from the f2 channel

Phase-sensitive ge-2D HSQC-ROESY using echo-antiecho and adiabatic pulses


(hsqcetgprosp | HSQCETGPROSP)

Phase-sensitive ge-2D HSQC-ROESY using echo-antiecho and adiabatic pulses with T-
ROESY(hsqcetgprosp.2)


- Gradient-enhanced from the f3 channel

Phase-sensitive ge-2D ^1H - ^{15}N HSQC-ROESY using echo-antiecho (hsqcetf3gpro)


Phase-sensitive ge-2D ^1H - ^{15}N HSQC-ROESY with T-ROESY using echo-antiecho
(hsqcetf3gpro.2)



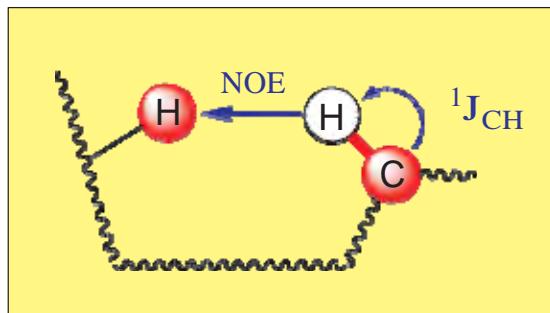


hsqcetgprosp

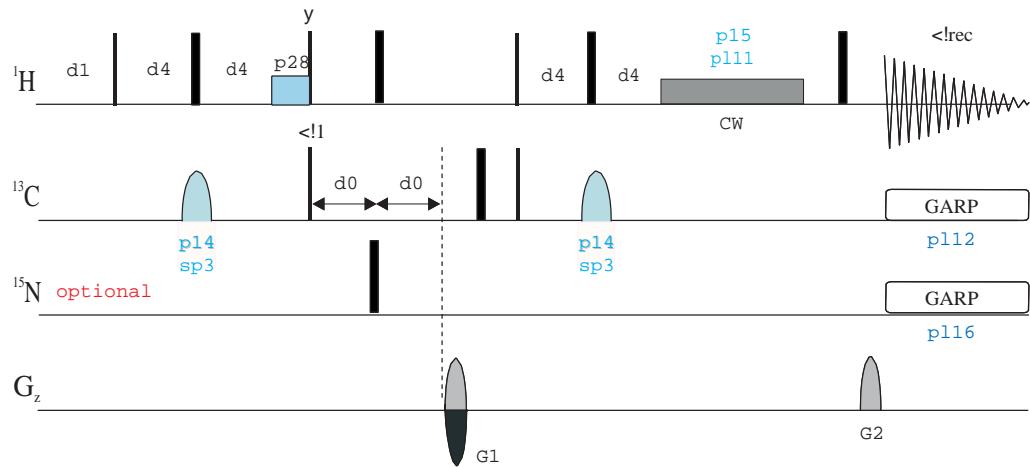

hsqcetgprosp.2

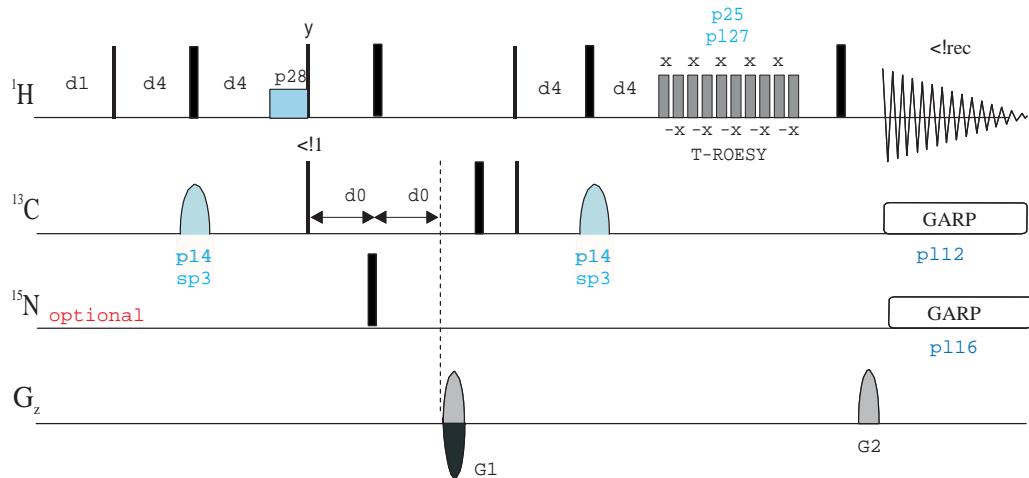

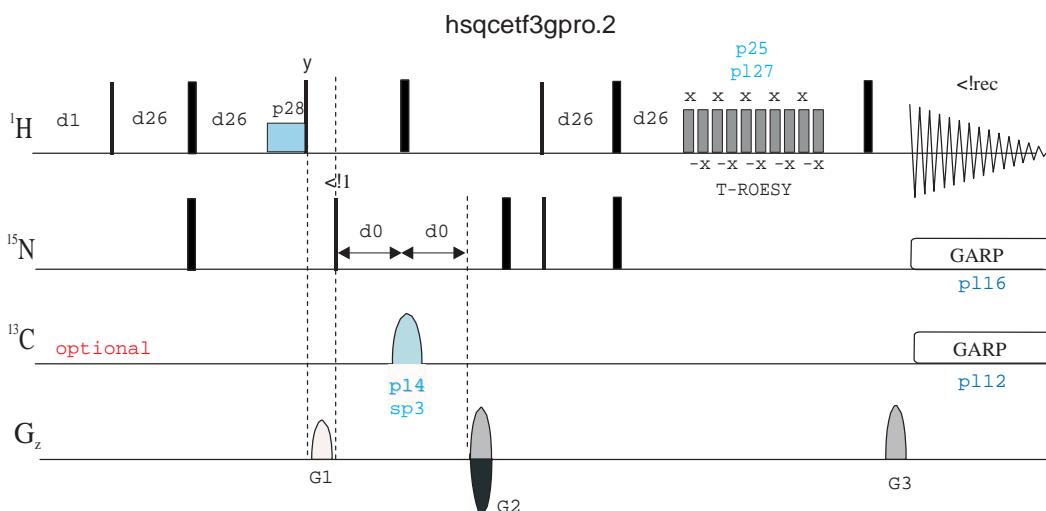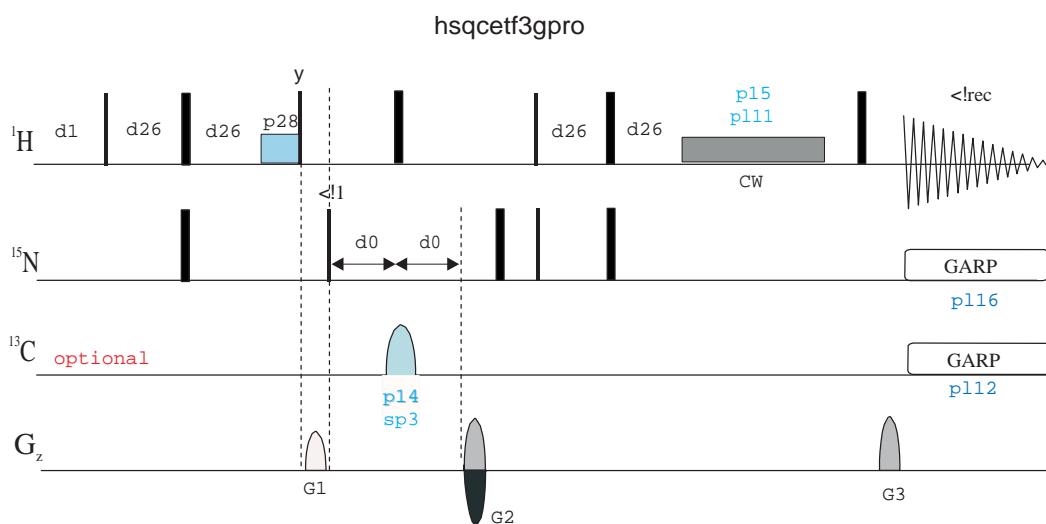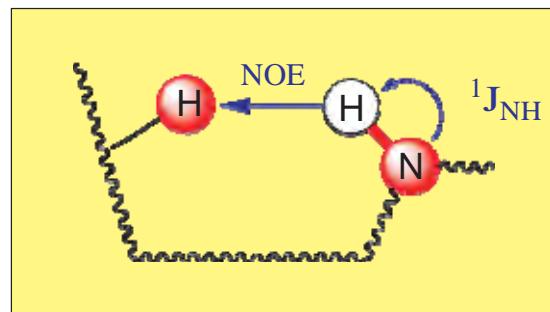

BRUKER
PULSE PROGRAM
CATALOGUE

NMRGuide

2D HSQC-NOESY EXPERIMENTS


- Gradient-enhanced from the f2 channel

Phase-sensitive ge-2D HSQC-NOESY using echo-antiecho and adiabatic pulses (hsqcetgpnosp | HSQCETGPNSP)


- Gradient-enhanced from the f3 channel


Phase-sensitive ge-2D ^1H - ^{15}N HSQC-NOESY using echo-antiecho (hsqcetf3gpnosp | HSQCETF3GPNSP)

Phase-sensitive ge-2D ^1H - ^{15}N HSQC-NOESY using XY16 and WATERGATE (hsqcf3gpnogxy)

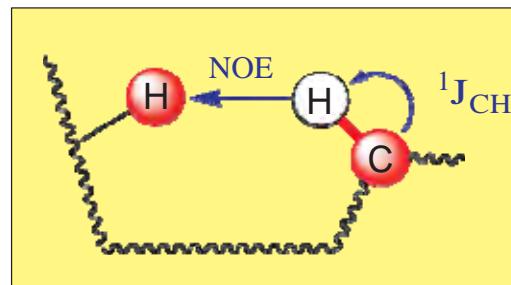


hsqcetgpnosp

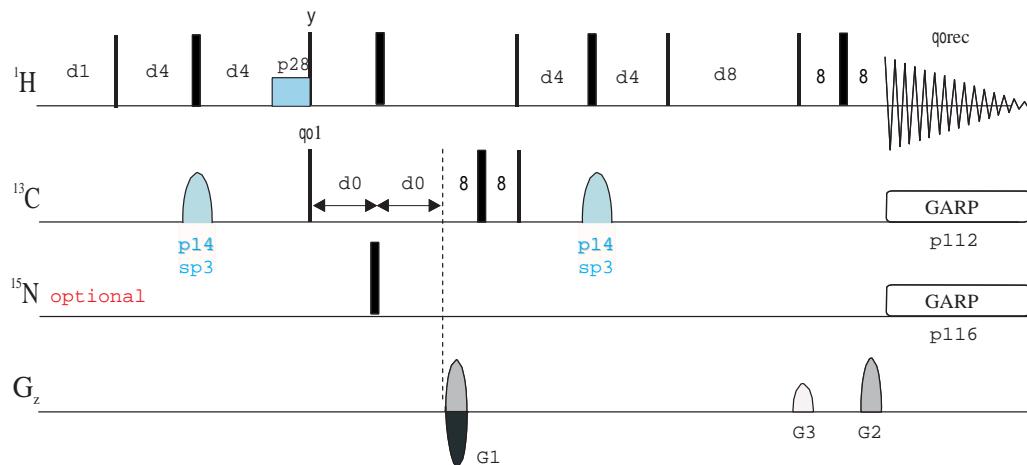


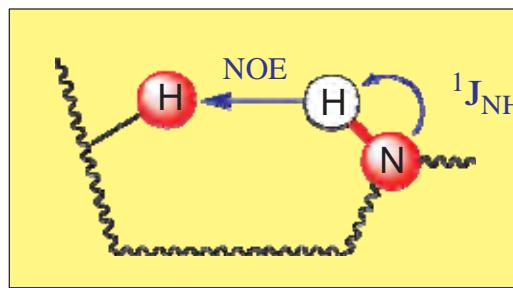


hsqcetf3gpno

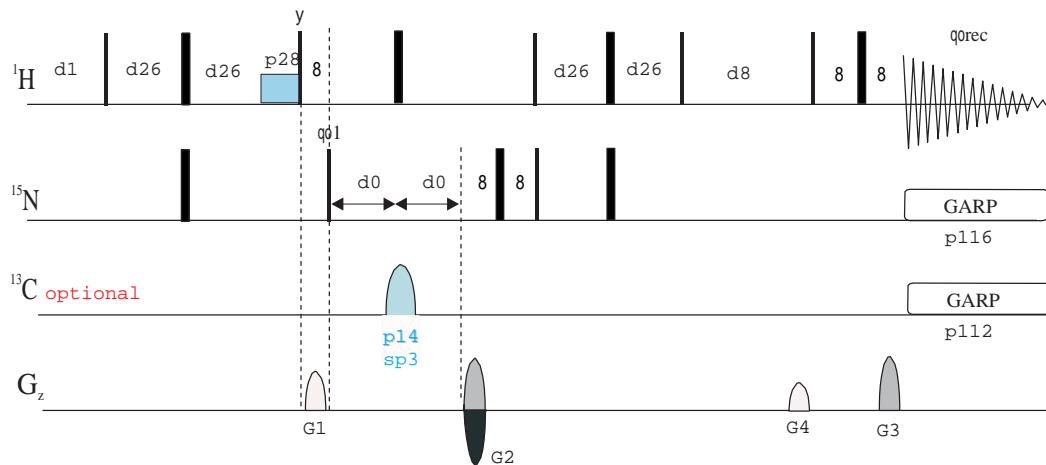

hsqcf3gpnnowgxy

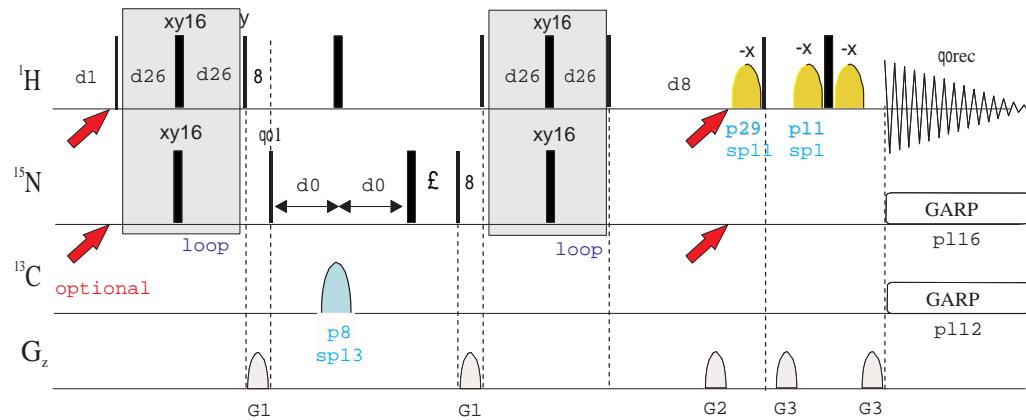

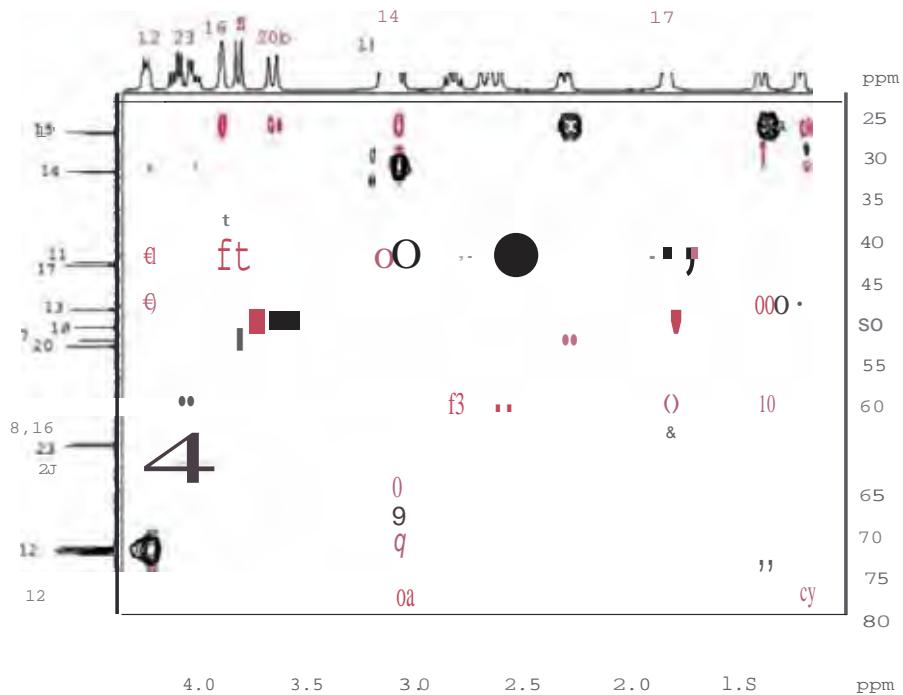

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D HMBC EXPERIMENTS

Phase cycled:

Magnitude-mode 2D HMBC using low-pass J-filter (hmbclpndqf | HMBCLPND)

Magnitude-mode 2D HMBC with presaturation (hmbcndprqf)

Magnitude-mode 2D HMBC with off-resonance presaturation (hmbcndpsqf)

Gradient-based:

Magnitude-mode ge-2D HMBC (hmbcgpndqf | HMBCGPND)

Magnitude-mode ge-2D HMBC using low-pass J-filter (hmbcgplpndqf | HMBCGPLPND)

Magnitude-mode ge-2D HMBC using double low-pass J-filter (hmbcgpl2ndqf)

Magnitude-mode band-selective ge-2D HMBC without decoupling

(shmbcgpndqf)

Magnitude-mode CIGAR-HMBC without decoupling (hmbcacgplpndqf)


Magnitude-mode CIGAR-HMBC with decoupling (hmbcacgplpqf)


ge-2D 2J,3J HMBC, STAR-HMBC (hmbcacbigpl2ndqf)

ge-2D HSMC (hmscetgpnd)


Also see:

- Measurement of long-range proton-carbon coupling constants
- 2D COLOC Experiment
- ADEQUATE Experiments

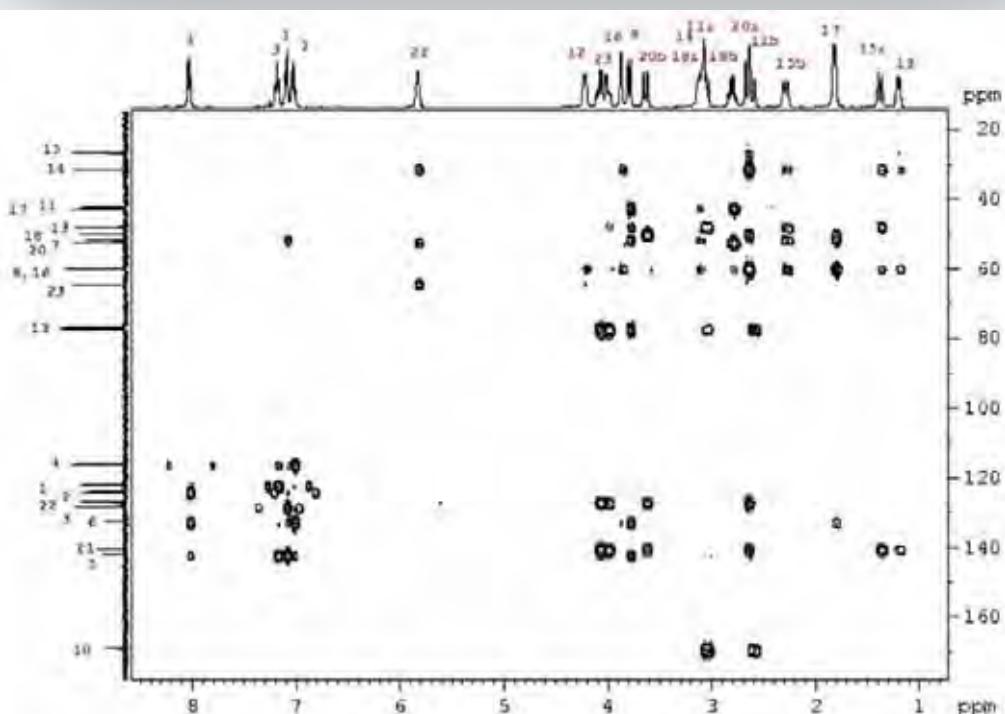


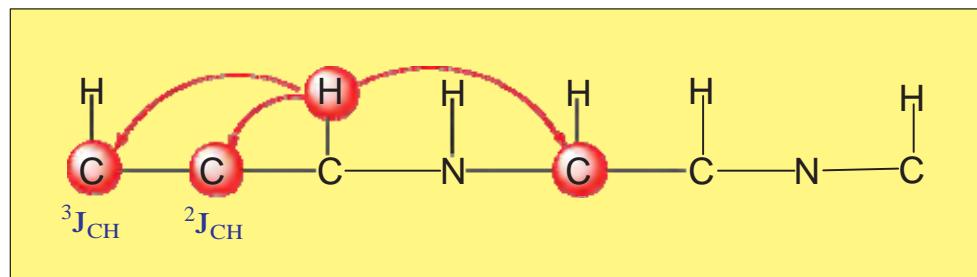


hmbclpndqf

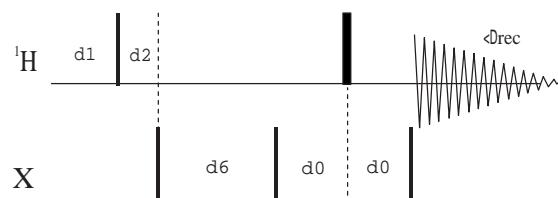


hmbcndprqf

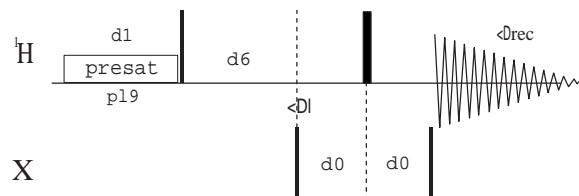


hmbcndpsqf

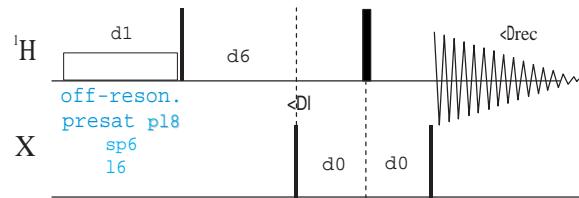


hmbcgpndqf

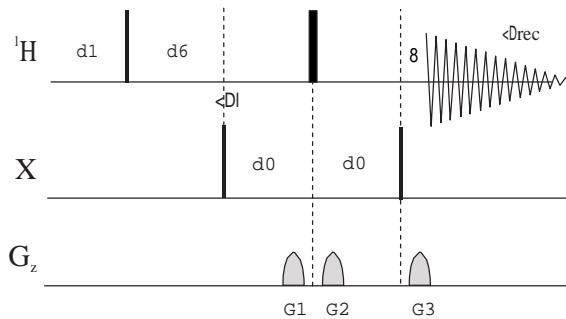


hmbcgpplpndqf

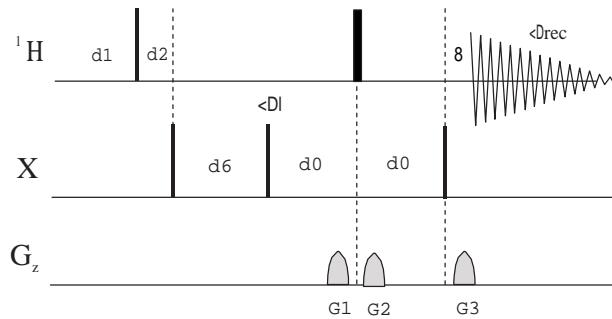


hmbcgppl2ndqf

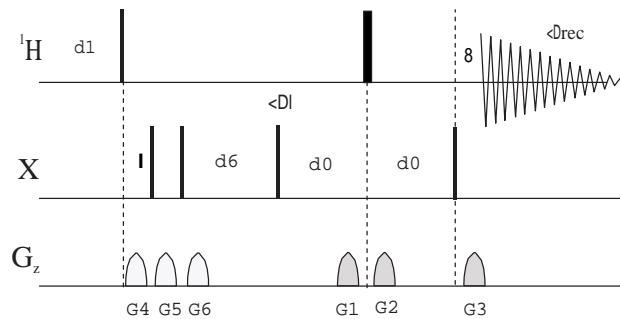


shmbcgpndqf

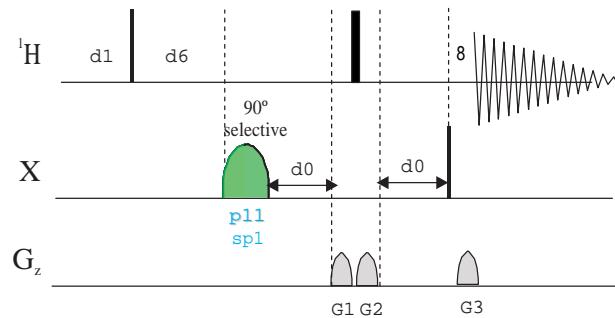


hmbcacgplpqf

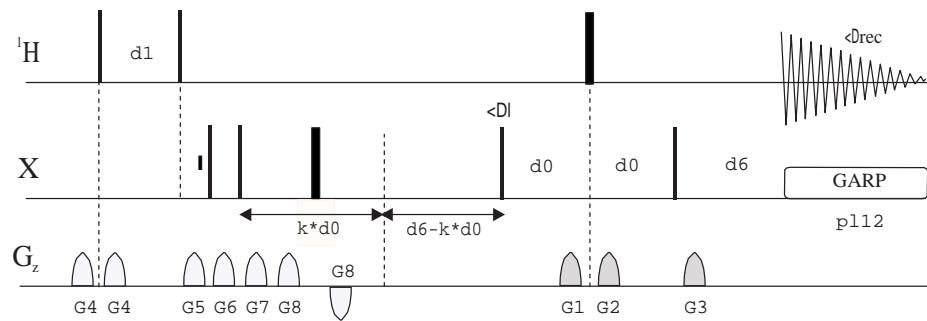



hmbcacgplpndqf

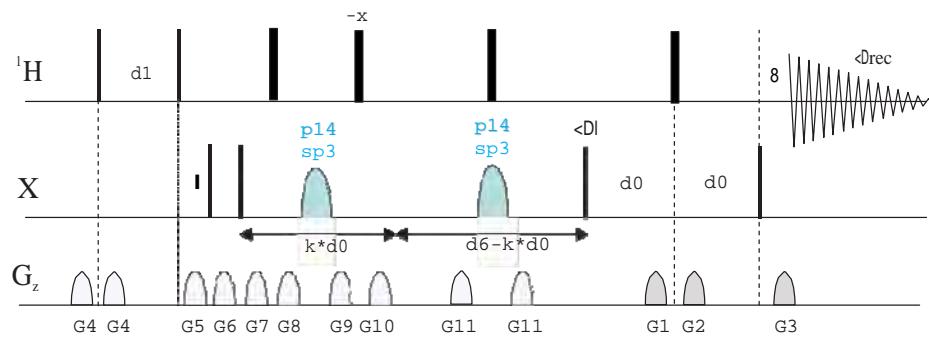

hmbcacbigpl2ndqf

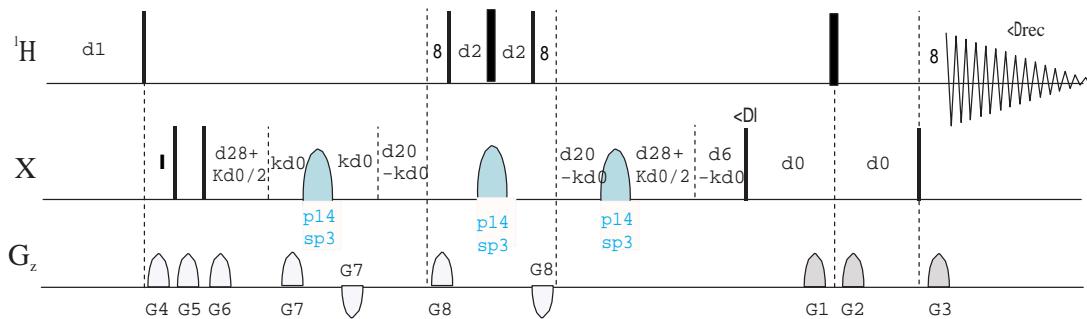

hmscetgpnd

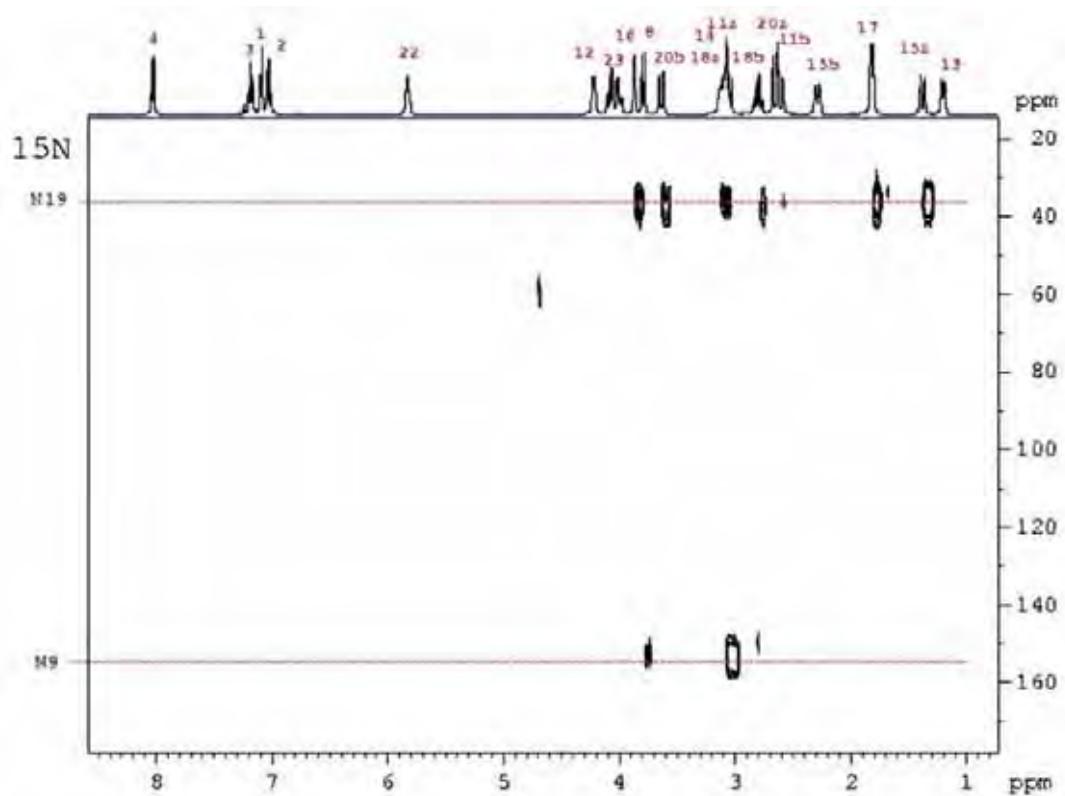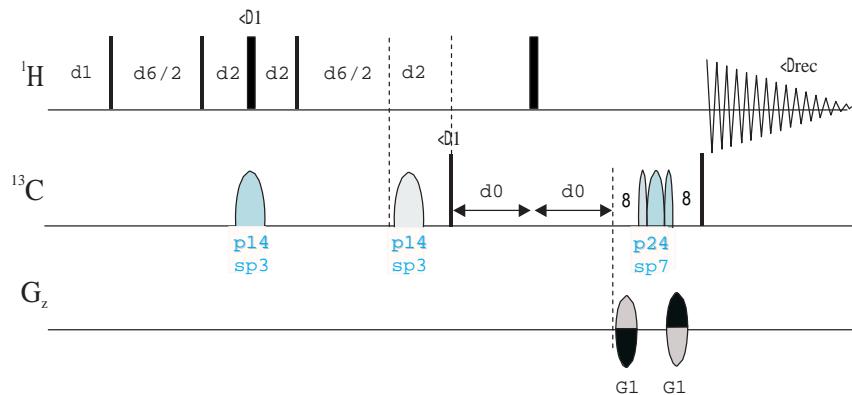

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

A faint, semi-transparent watermark of the word "NMRGuide" is visible behind the main title.

2D EXPERIMENTS TO MEASURE LONG-RANGE PROTON-CARBON COUPLING CONSTANTS

ge-2D HMBC-type experiments

Phase-sensitive ge-2D HMBC using echo-antiecho (hmbcetgpnd)
Phase-sensitive ge-2D HMBC using a two-fold low-pass J-filter (hmbcetgpl2nd)

Phase-sensitive ge-2D CT-HMBC using echo-antiecho (hmbcctetgpnd)

ge-2D J-HMBC using a two-fold low-pass J-filter (hmbcetgpjcl2nd)

Long-range optimized ge-2D HSQC


Phase-sensitive ge-2D long-range optimized HSQC (HSQMBC) (hsqcetgplrsp)
Phase-sensitive ge-2D long-range optimized HSQC using G-BIRD (GBIRD-HSQMBC) (hsqcetgpjclrnd)
ge-2D long-range optimized J-HSQC (EXSIDE) (hsqcetgplrjcsps)

ge-2D HSQC-TOCSY type experiments


ge-2D w1-filtered TOCSY using DIPSI-2 (HETLOC) (dipsi2etgpjcsix1)
Phase-sensitive ge-2D HSQC-HECADE (hsqcdietgpjendsisp)

Also see 2D HMBC and 2D HSQC-TOCSY experiments

HSQC-TOCSY

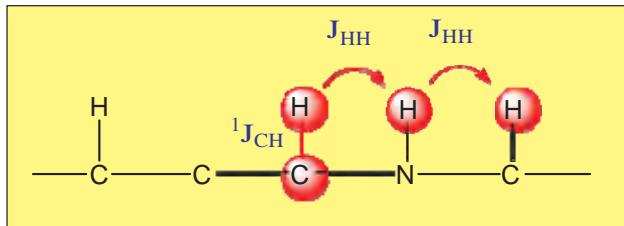



HMBC

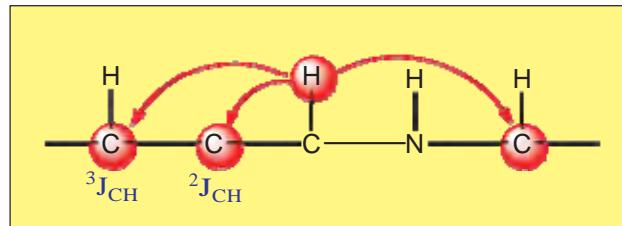



Others: HMQC-TOCSY, HECADE, HETLOC
Two steps: $^1\text{J}_{\text{CH}} + \text{J}_{\text{HH}}$
Only for protonated carbons
In-phase Magnetization

Others: HSQMBC, EXSIDE, J-HMBC
A single step: $^1\text{J}_{\text{CH}}$
For all carbons
Anti-phase Magnetization

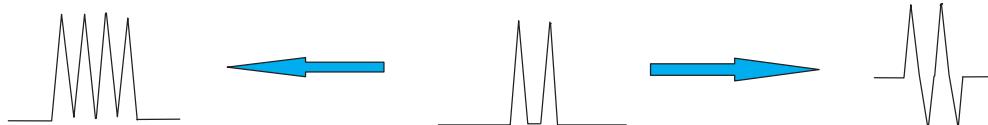


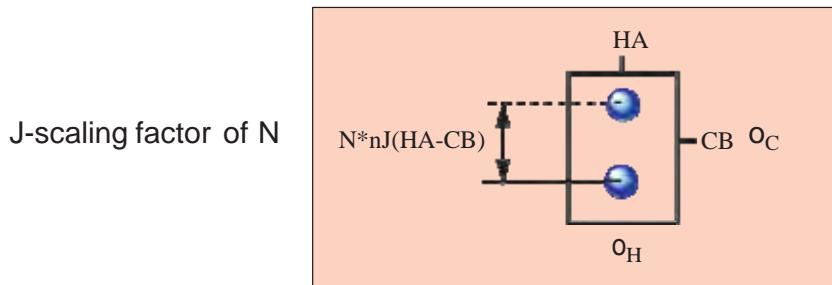


hmbcetgpjcl2nd

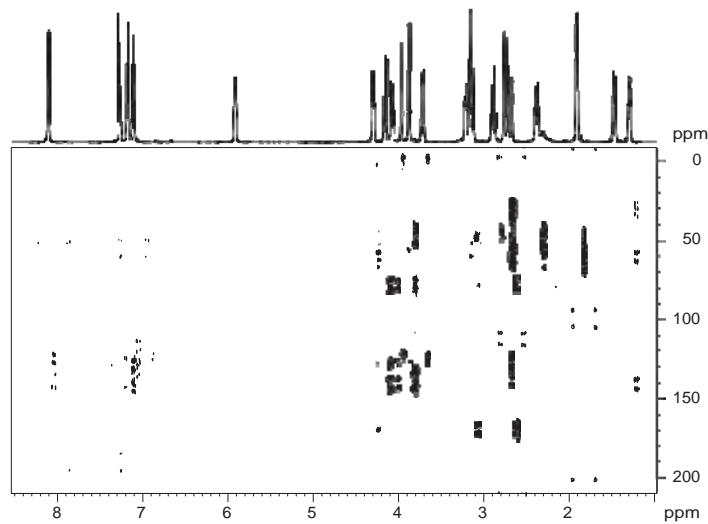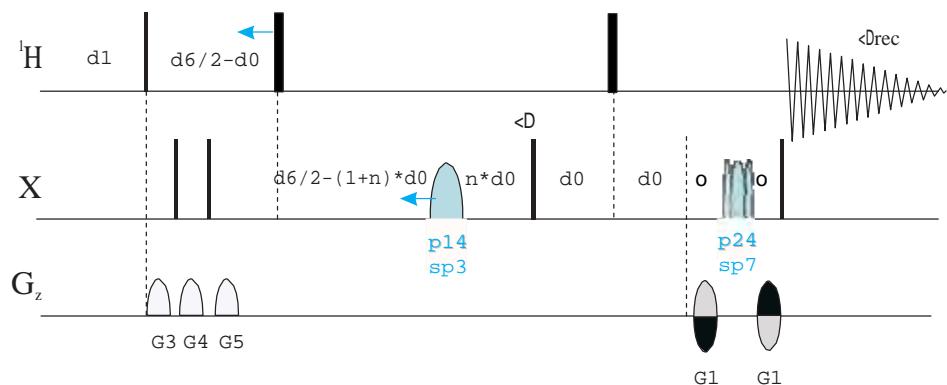



J-scaling factor of N

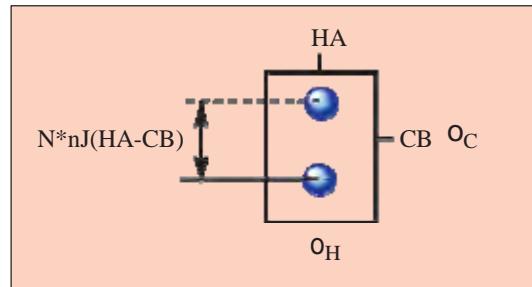


hsqcetgplrcjcs

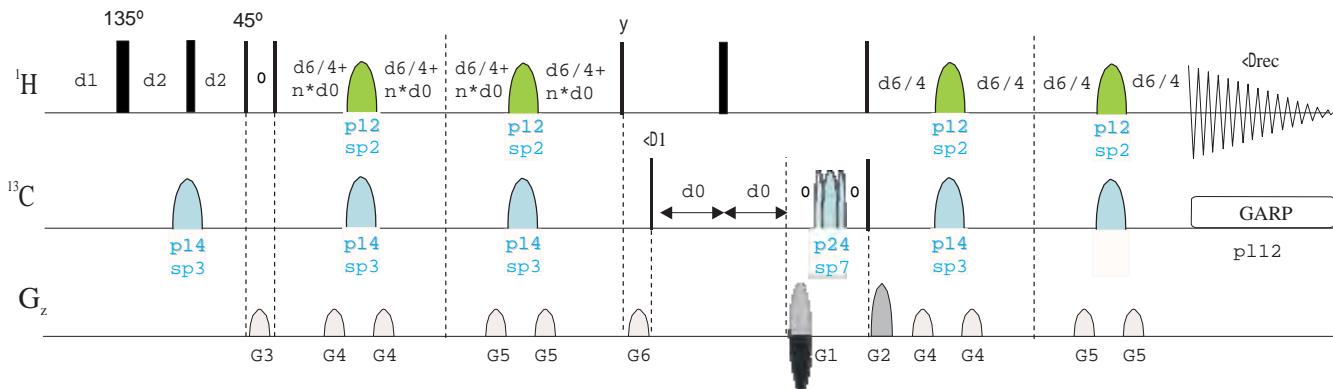


hmbcetgpnd

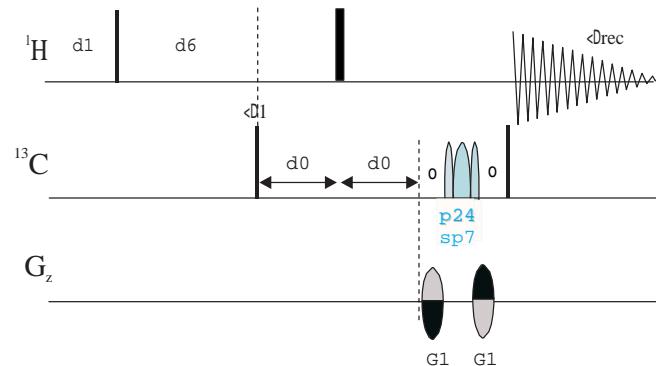


hmbcetgpl2nd

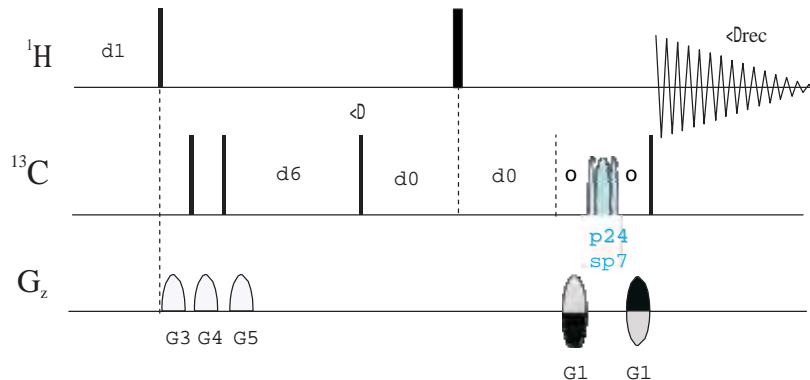


hmbcctetgpnd

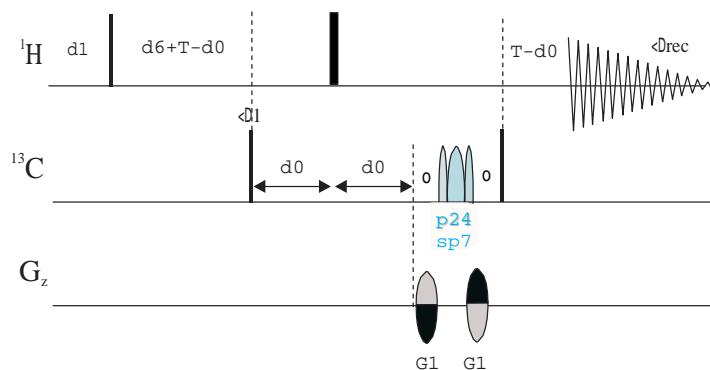





hsqcetgplrsp


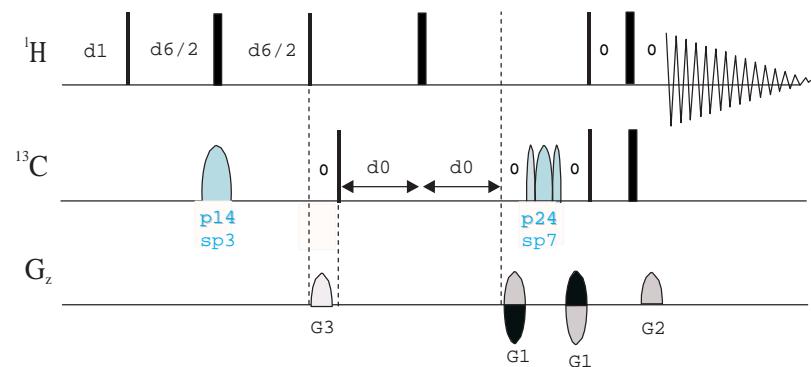





hsqcetgpjclrnd

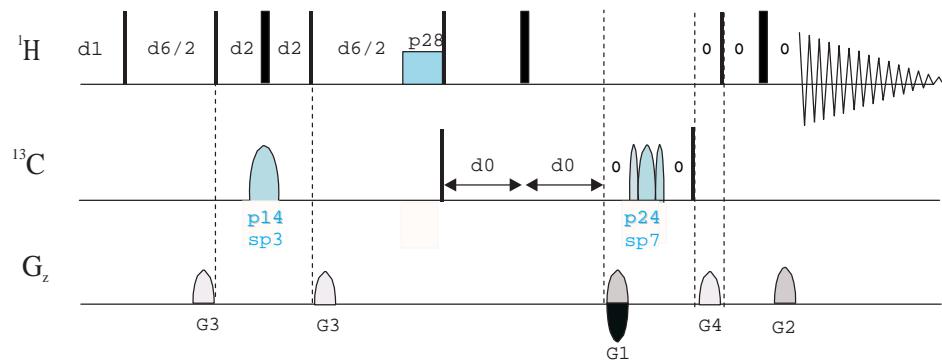

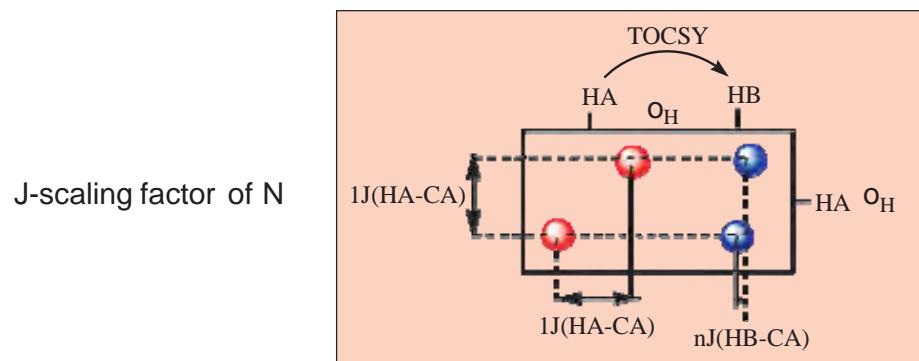

dipsi2etgpjcsix1

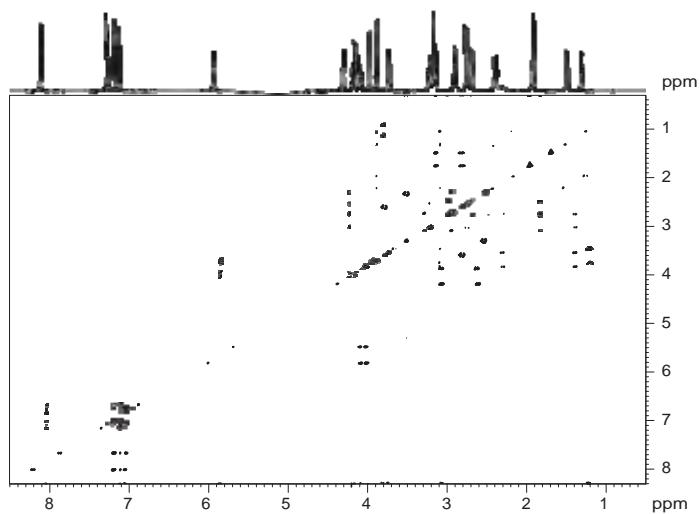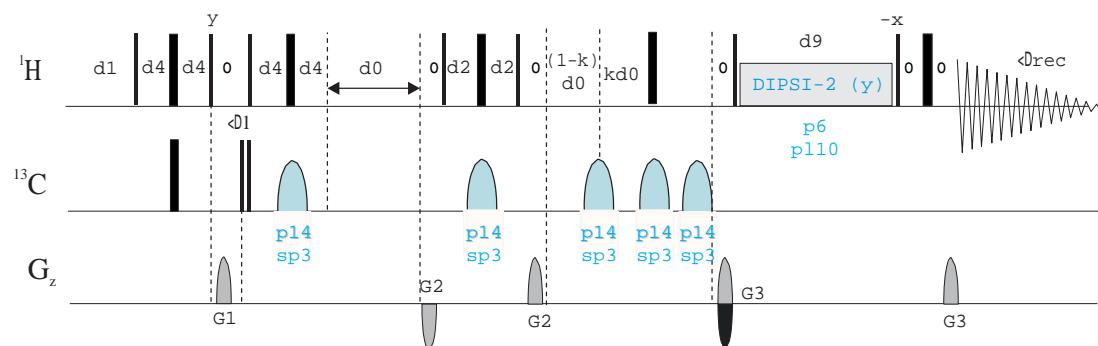

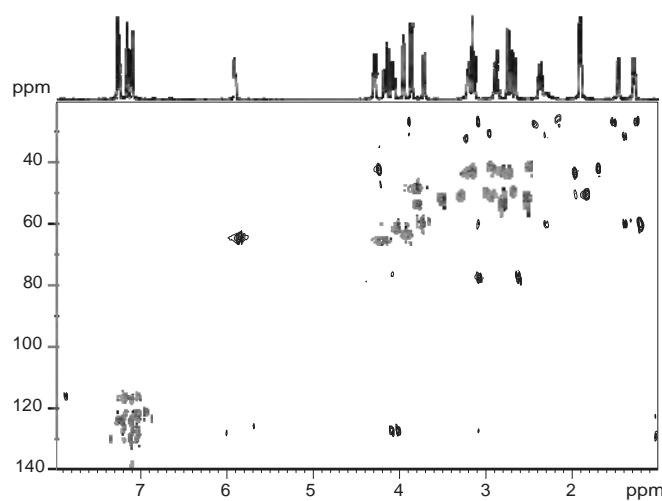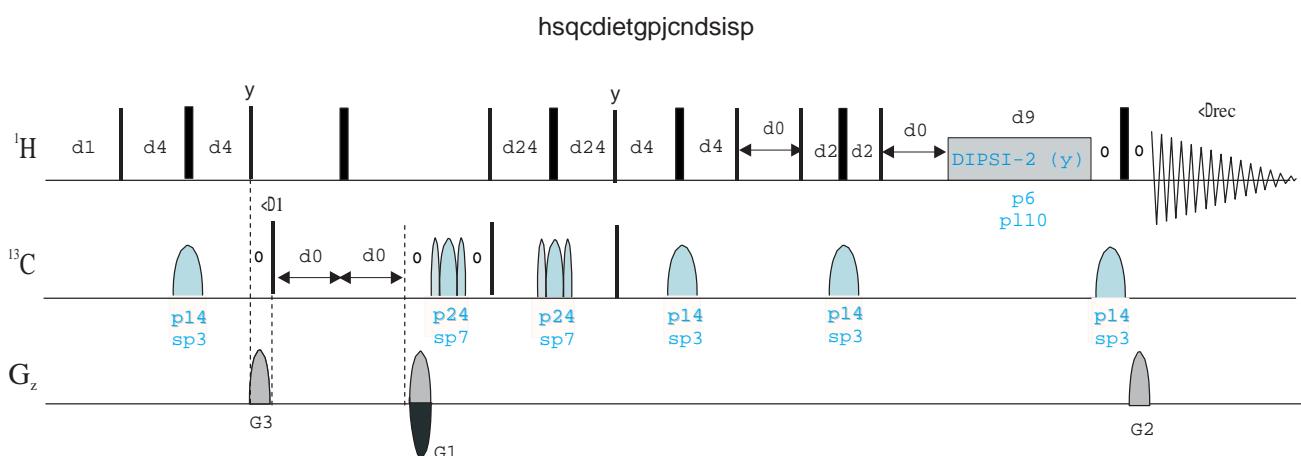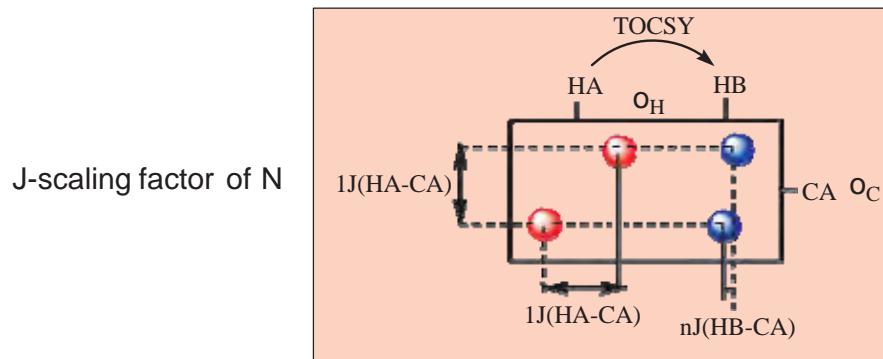

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

2D ADEQUATE EXPERIMENTS

- **1,1-ADEQUATE:**

Phase-sensitive 1,1 ADEQUATE (adeq11etgp)

Phase-sensitive 1,1 ADEQUATE using adiabatic pulse (adeq11et gpsp)

Phase-sensitive 1,1 ADEQUATE with refocusing (adeq11etgprd)

Phase-sensitive 1,1 ADEQUATE with refocusing using adiabatic pulse (adeq11etgprdsp)

- **1,n-ADEQUATE:**


Phase-sensitive 1,n ADEQUATE (adeq1netgp)




- **n,1-ADEOUATE:**


Phase-sensitive n,1 ADEQUATE (adeqn1etgp)

- **n,n-ADEQUATE:**


Phase-sensitive n,n ADEQUATE (adeqnnetgp)

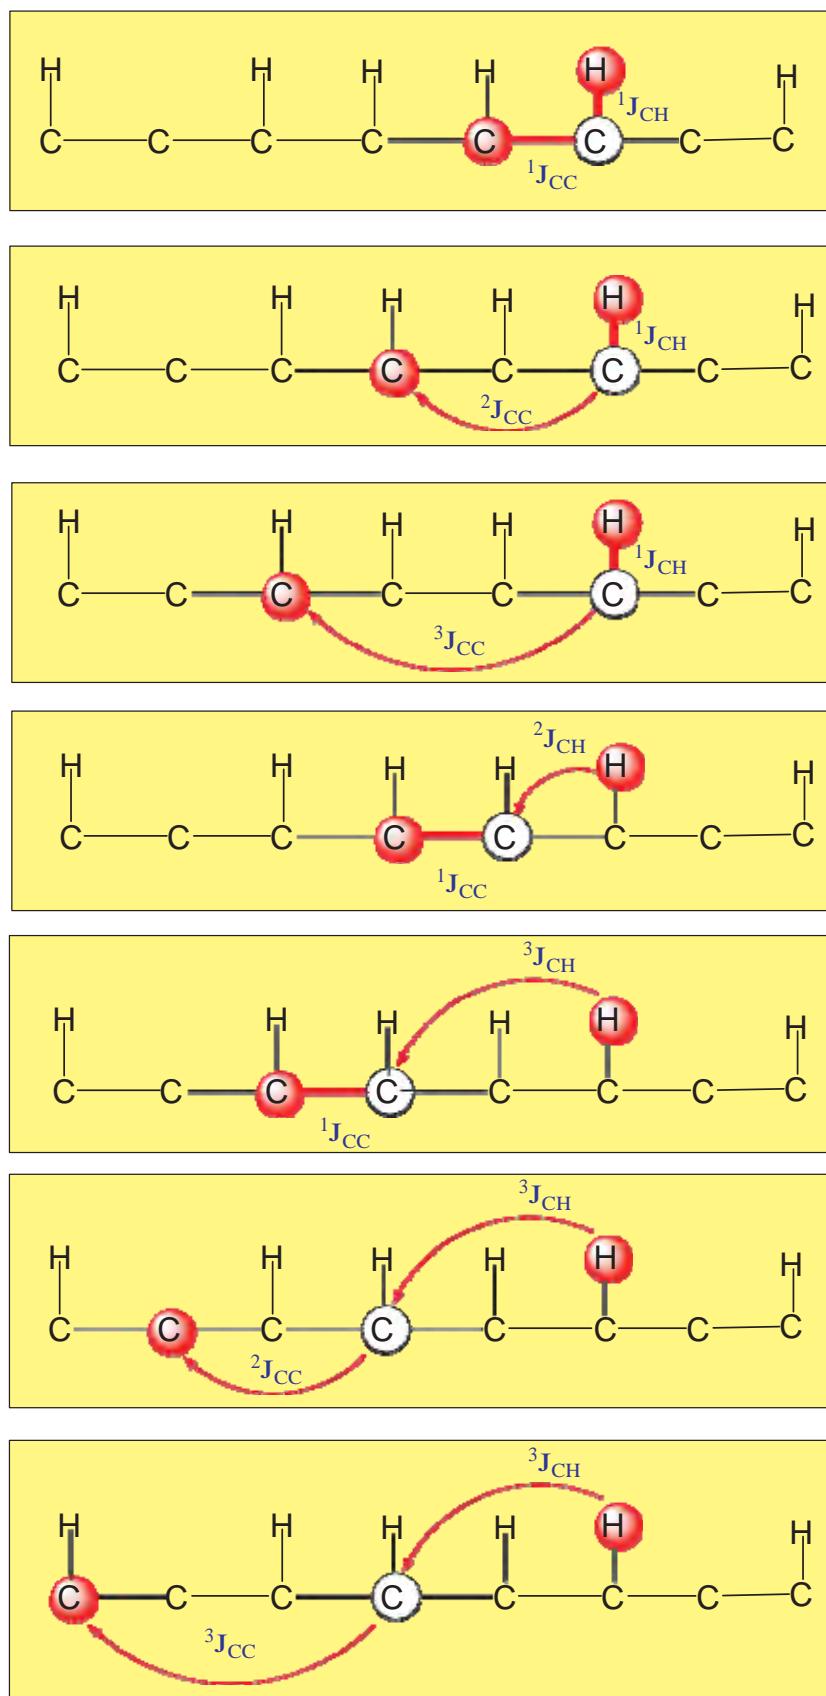

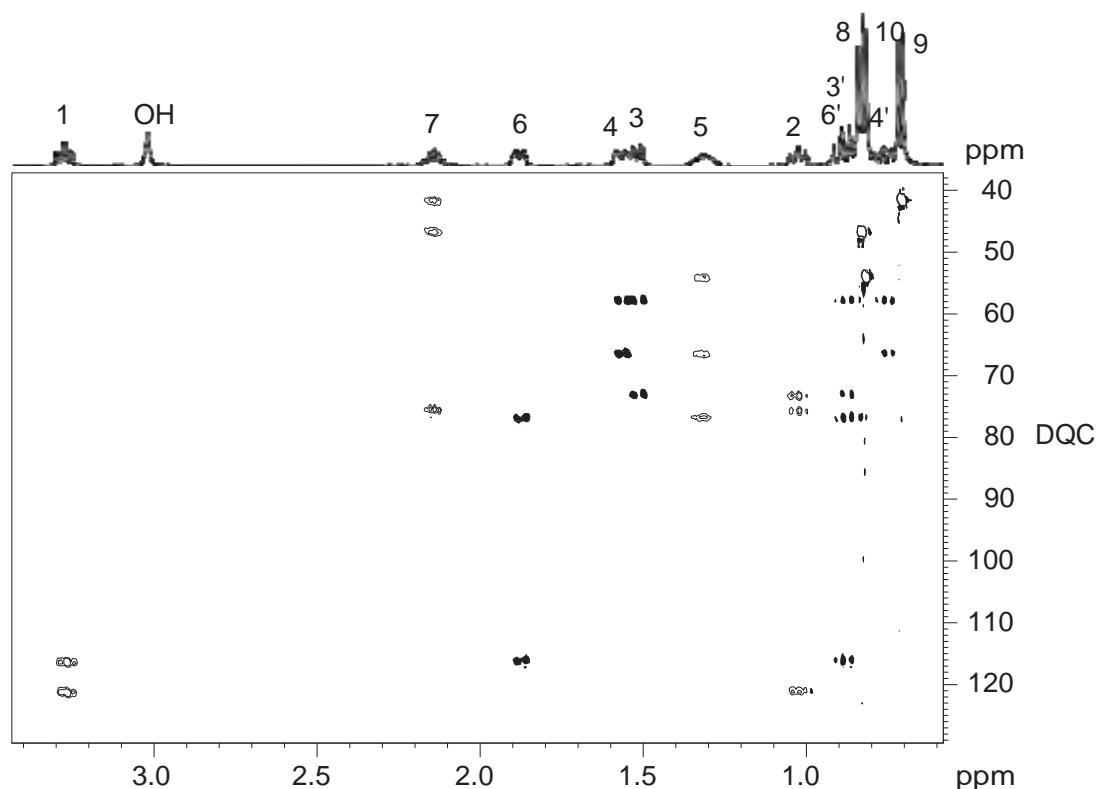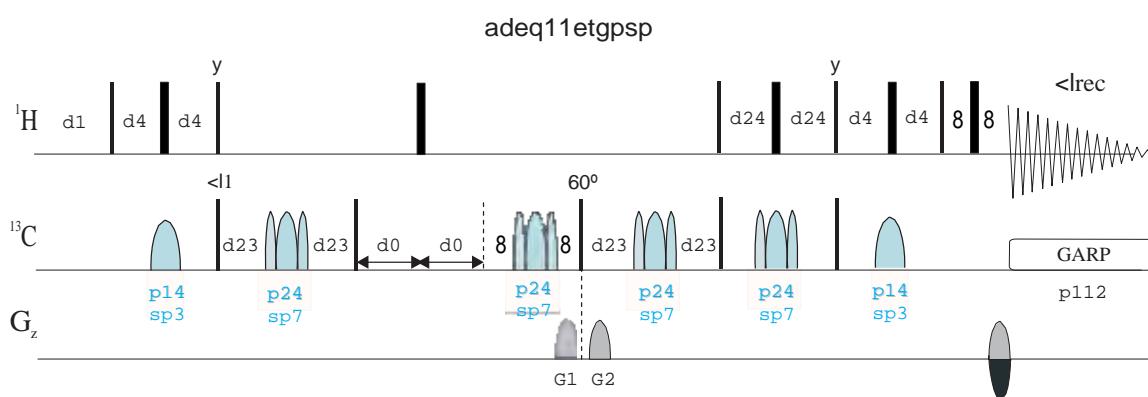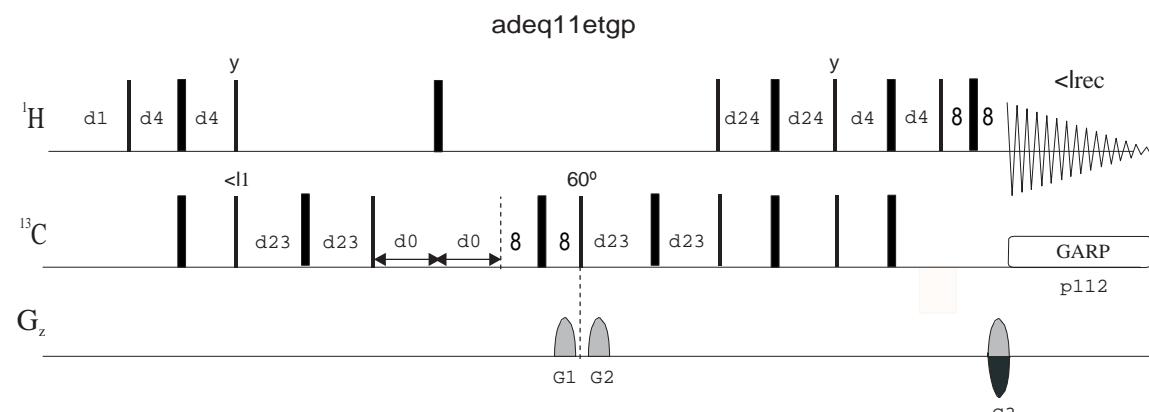


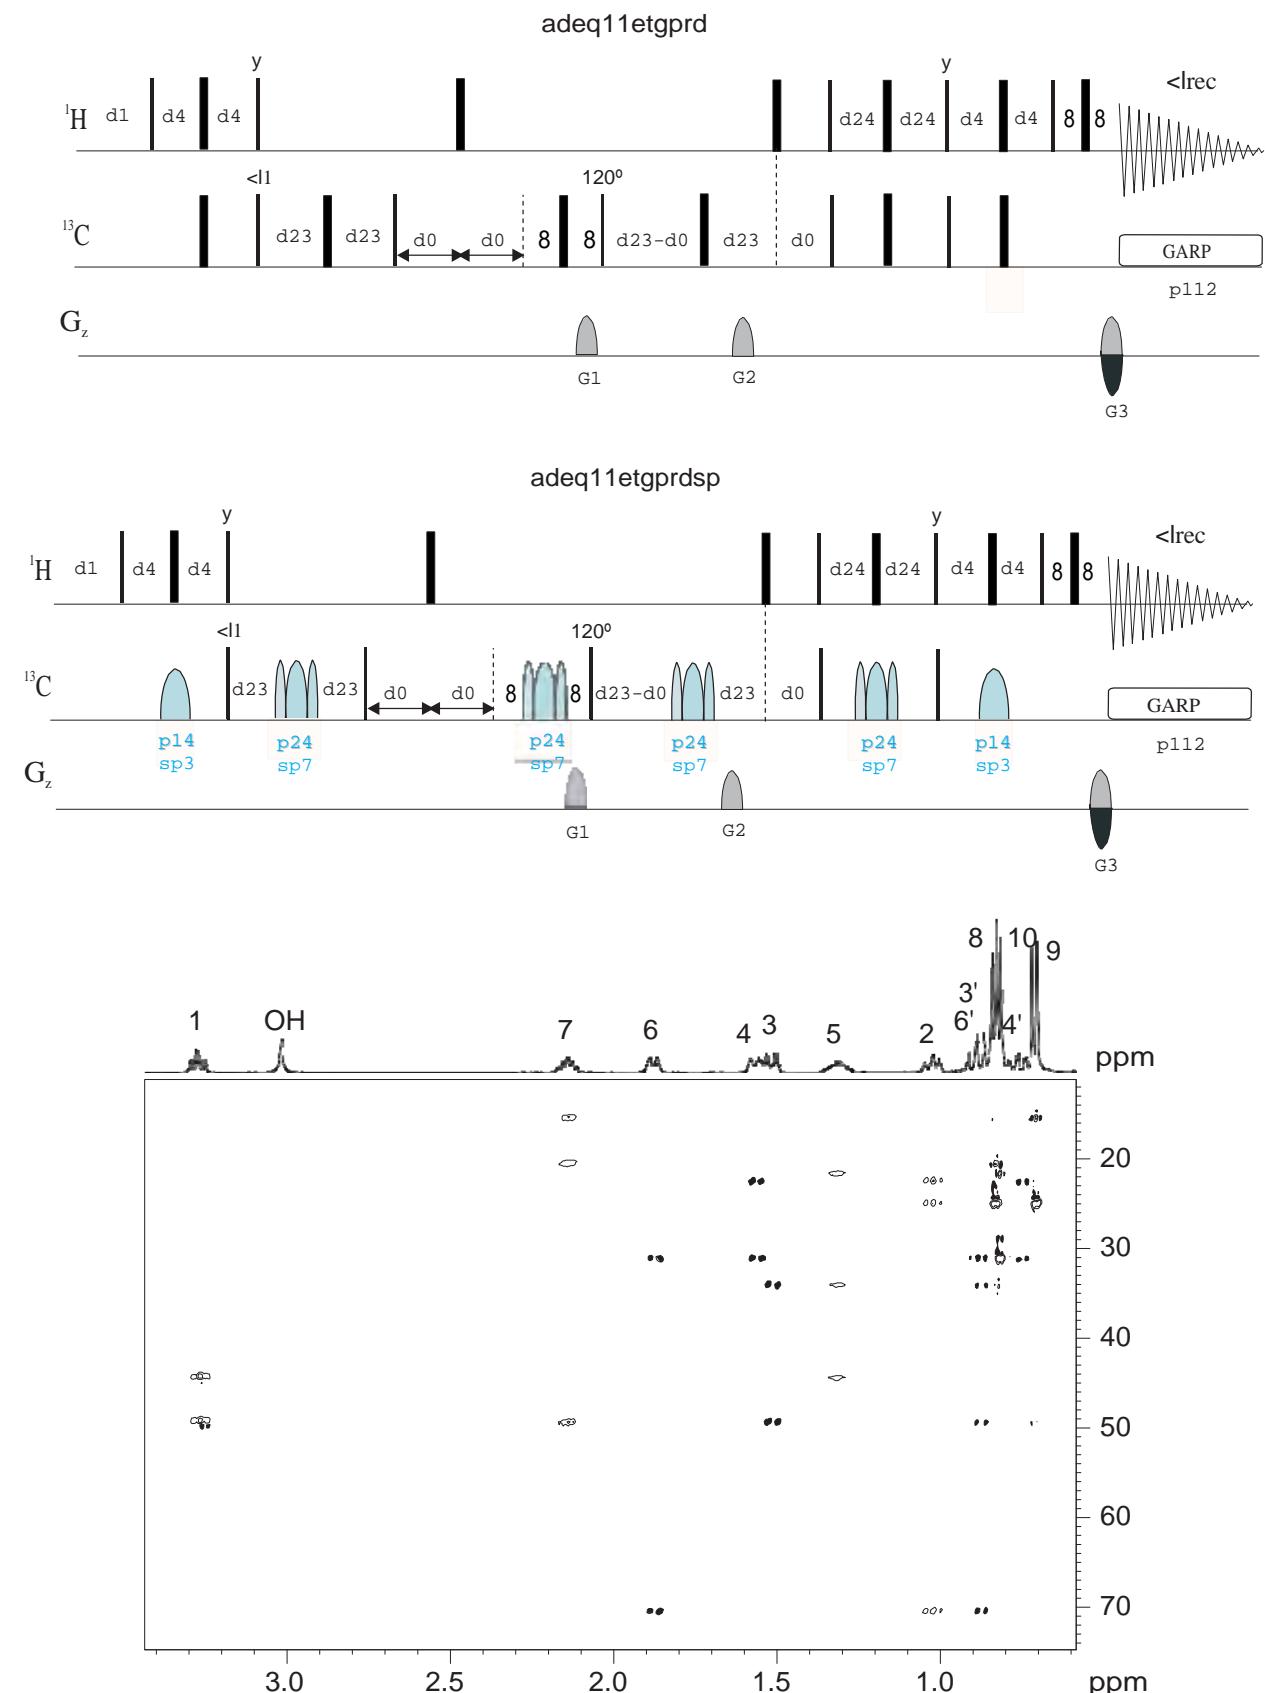


adeq1netgp

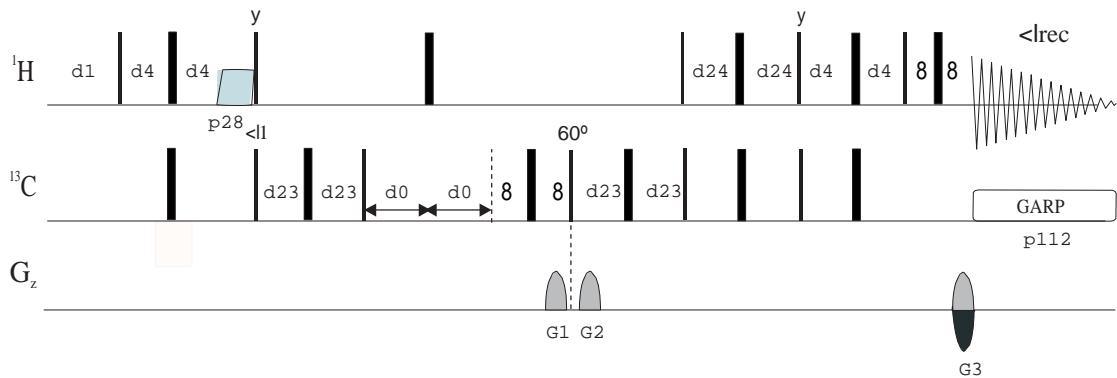

adeqn1etgp

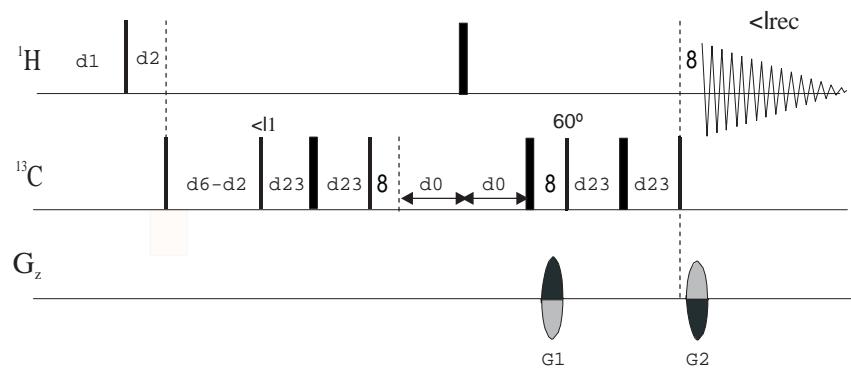

adeqnnnetgp

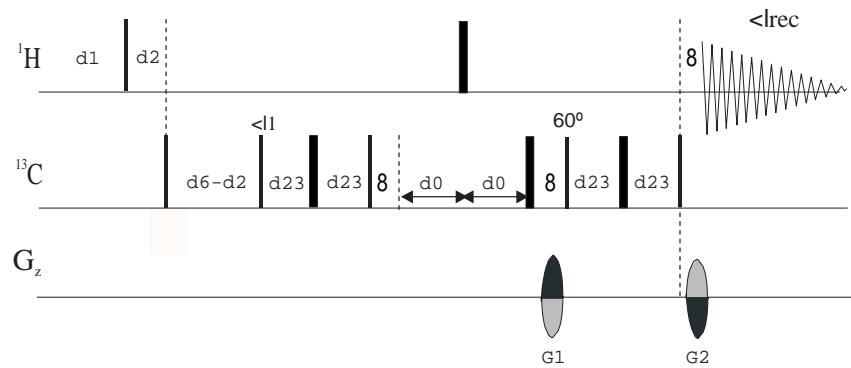

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

A faint, semi-transparent watermark of the word "NMRGuide" is visible behind the main title.

DIFFUSION/DOSY EXPERIMENTS

Conventional 1D:

1D Stimulated Echo experiment (STE) (stegp1s1d)
1D Stimulated Echo experiment using bipolar gradients (stebpgp1s1d)
1D LED experiment (ledgp2s1d)
1D LED experiment using bipolar gradients (ledbpgp2s1d)
1D Double-Stimulated Echo Experiment (DSTE) (dstegp3s1d)
1D Double-Stimulated Echo Experiment (DSTE) using bipolar gradients
(dstebpgp3s1d)

1D Stimulated Echo experiment using bipolar gradients and WATERGATE
(stebpgp1s191d)

1D STE-INEPT experiment (stebpgpin1s1d)

2D DOSY maps:

2D Stimulated Echo experiment (STE) (stegp1s)
2D Stimulated Echo experiment using bipolar gradients (stebpgp1s)

2D Double-Stimulated Echo Experiment (DSTE) (dstegp3s)
2D Double-Stimulated Echo Experiment (DSTE) using bipolar gradients (dstebpgp3s)
2D LED experiment (ledgp2s)
2D LED experiment using bipolar gradients (ledbpgp2s)

2D Stimulated Echo experiment using bipolar gradients and WATERGATE
(stebpgp1s19)







2D STE-INEPT experiment (stebpgpin1s)

2D & 3D DOSY related experiments:

3D DOSY-COSY using LED with bipolar gradients (ledbpgpco2s3d)

2D DOSY-TOCSY with LED using bipolar gradients (ledbpgpml2s2d)
2D DOSY-TOCSY with LED using bipolar gradients and WATERGATE
(ledbpgpml2s192d)
3D DOSY-TOCSY using LED with bipolar gradients (ledbpgpml2s3d)

3D DOSY-NOESY using LED with bipolar gradients (ledbpgpno2s3d)

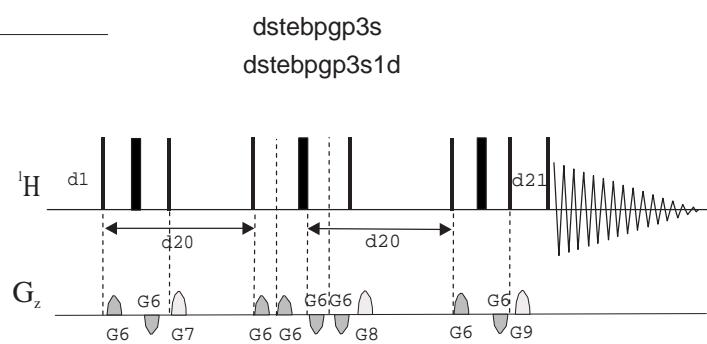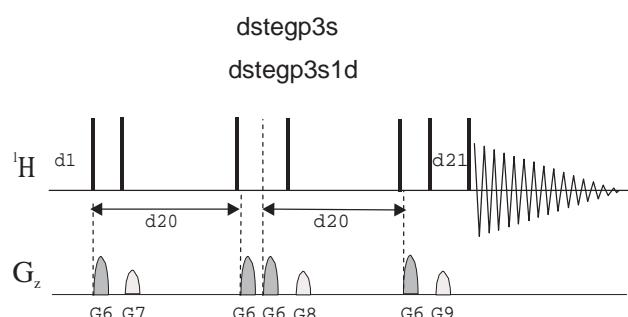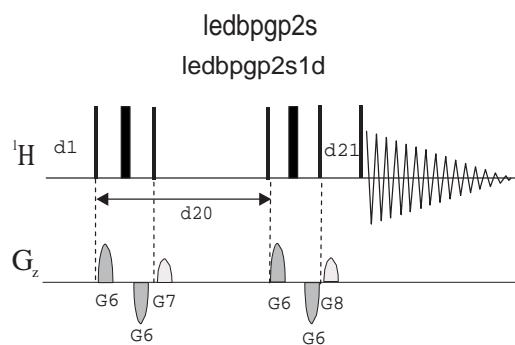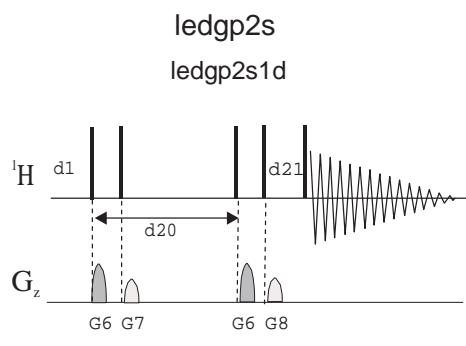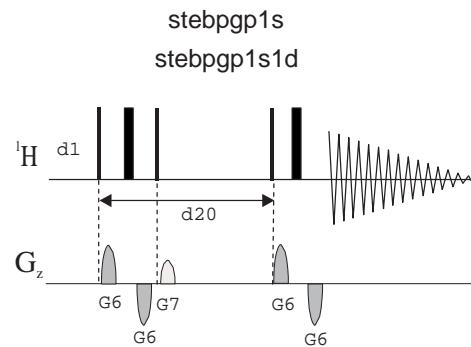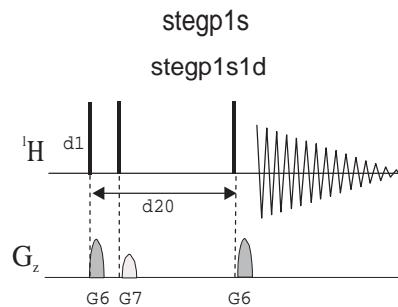

$$I = I_0 \exp(-Dy^2 g^2 t^2 / 3)$$

Diagram illustrating the components of the equation:

- Peak intensity
- Gyromagnetic Constant
- Diffusion Time (d_{20})
- Gradient Duration (p_{30})
- Initial Peak intensity
- Diffusion Coefficient
- Applied Gradient $g = G_{\max} * gpz6$


$$\ln(I/I_0) = -Dy^2 g^2 t^2 / 3$$



Stokes-Einstein Equation

$$D = K T / 6 \pi r Y R_H$$


Diagram illustrating the components of the Stokes-Einstein equation:

- Diffusion Coefficient
- Hydrodynamic radius
- Viscosity
- Boltzmann Constant
- Temperature

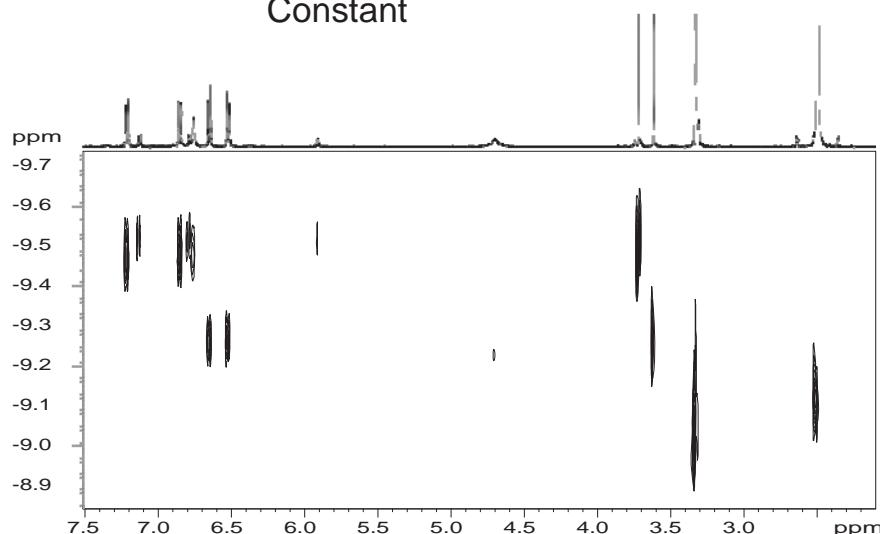

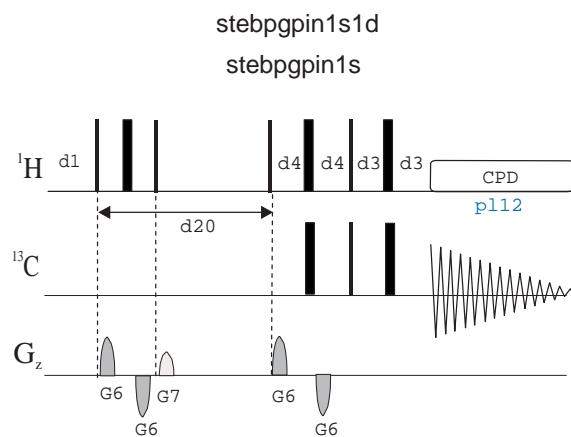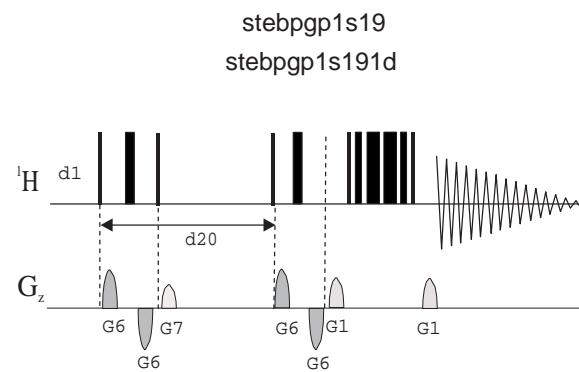


ledbpgpc02s3d

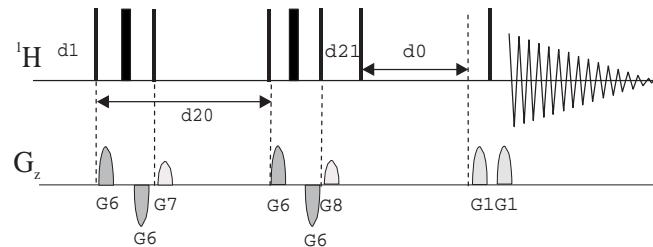


ledbpgpml2s3d


ledbpgpml2s2d

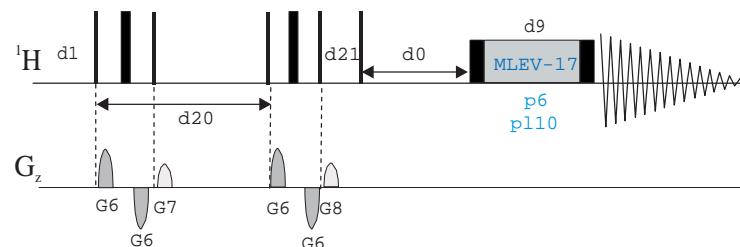

ledbpgpml2s192d

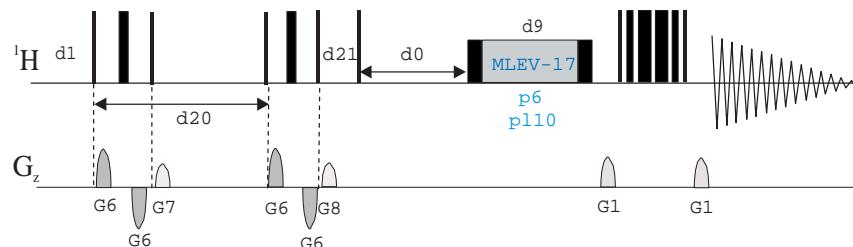

ledbpgpno3s3d

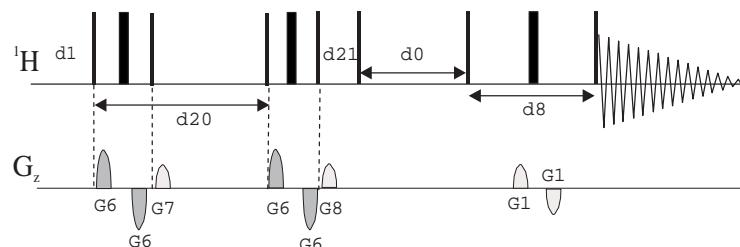

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

1D & 2D SATURATION TRANSFER
DIFFERENCE (STD) EXPERIMENTS

- 1D STD:

1D STD (stddiff)
1D STD with spoil (stddiff.2)
1D STD with spoil and T2 filter (stddiff.3)

- 1D STD with solvent suppression:

1D STD using 3-9-19 WATERGATE (stddiffgp19)
1D STD with spoil using 3-9-19 WATERGATE (stddiffgp19.2)
1D STD with spoil and T2 filter using 3-9-19 WATERGATE (stddiffgp19.3)
1D STD using excitation sculpting (stddiffesgp)
1D STD with spoil using excitation sculpting (stddiffesgp.2)
1D STD with spoil and T2 filter using excitation sculpting (stddiffesgp.3)

- 2D STD-TOCSY:


2D STD-TOCSY (stdmlevph)
2D STD-TOCSY using 3-9-19 WATERGATE (stdmlevgpph19)
2D STD-TOCSY using excitation sculpting (stdmlevesgpph)

- 2D STD-NOESY:


2D STD-NOESY with T2 filter in F2 (stdnoesygpph)
2D STD-NOESY with T2 filter in F1 and F2 (stdnoesygpph.2)
2D STD-NOESY using 3-9-19 WATERGATE with T2 filter in F2 (stdnoesygpph19)
2D STD-NOESY using 3-9-19 WATERGATE with T2 filter in F1 and F2 (stdnoesygpph19.2)
2D STD-NOESY using excitation sculpting with T2 filter in F2 (stdnoesyesgpph)
2D STD-NOESY using excitation sculpting with T2 filter in F1 and F2 (stdnoesyesgpph.2)

- 2D STD-HSQC:


2D STD-HSQC using echo-antiecho (stdhsqcetgpsp)
2D STD-HSQC with sensitivity-improvement (stdhsqcetgpsisp)

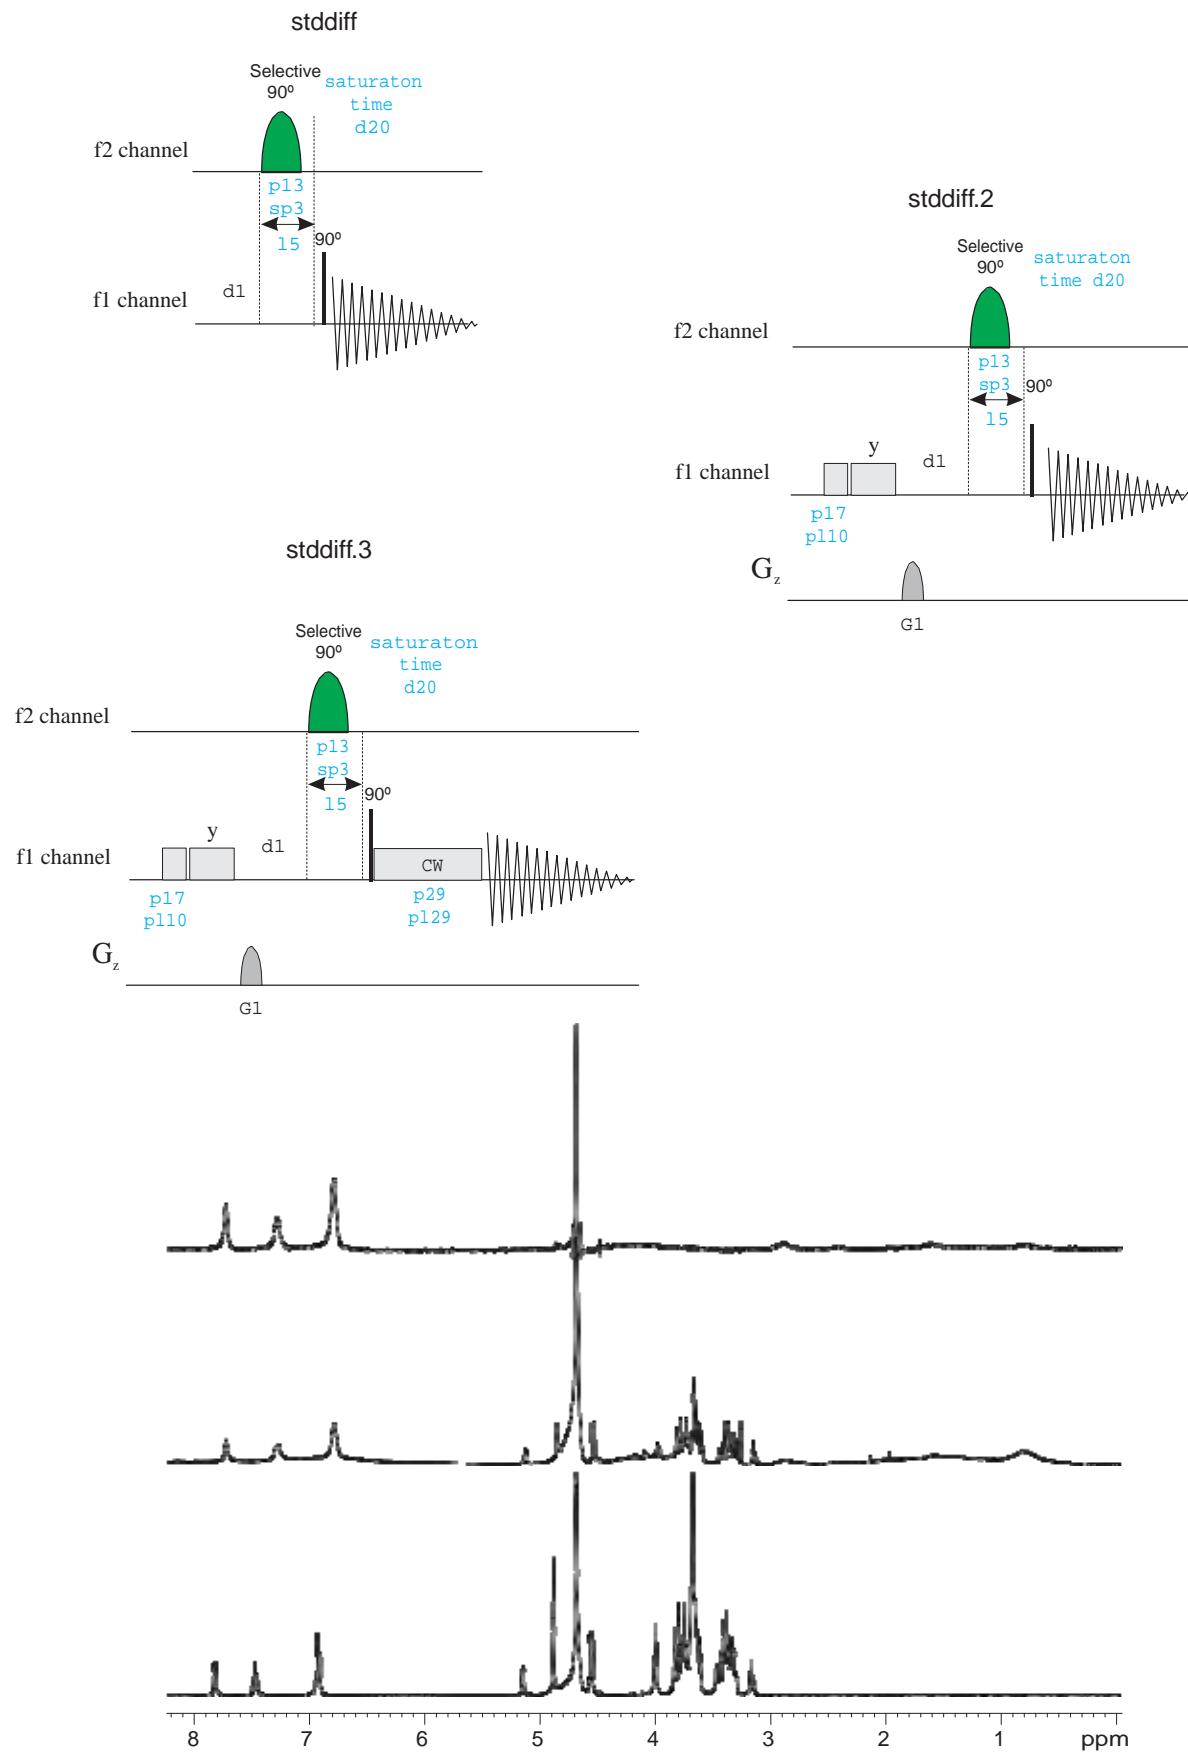


stddiffgp19

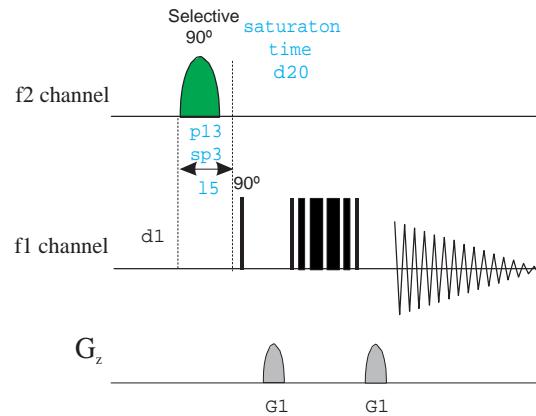


stddiffgp19.2

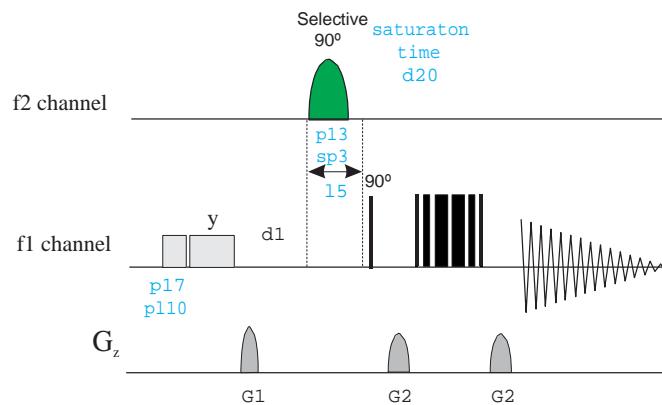


stddiffgp19.3

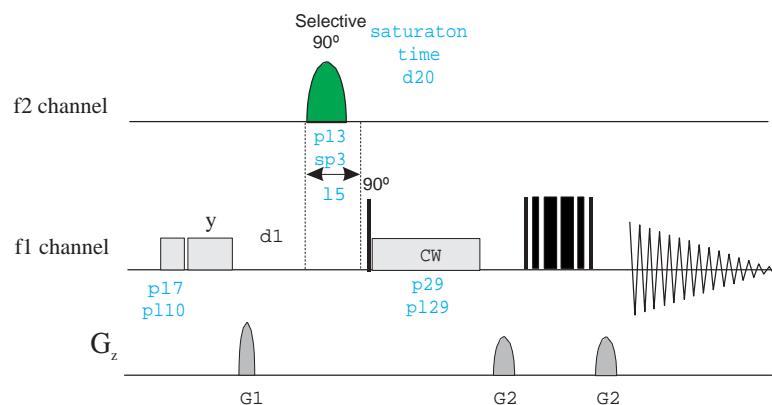


stddiffesgp

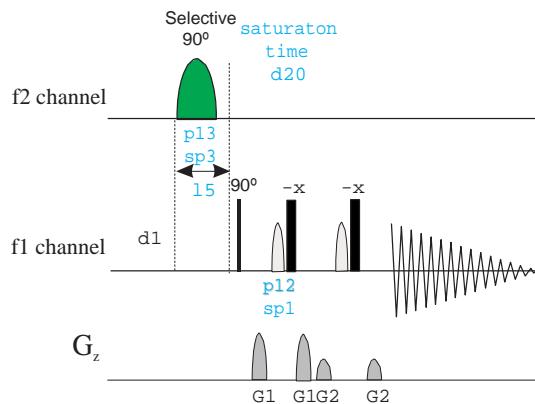


stddiffesgp.2

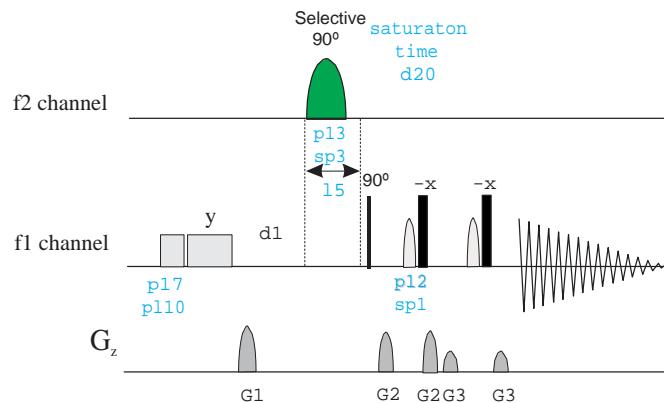


stddiffesgp.3

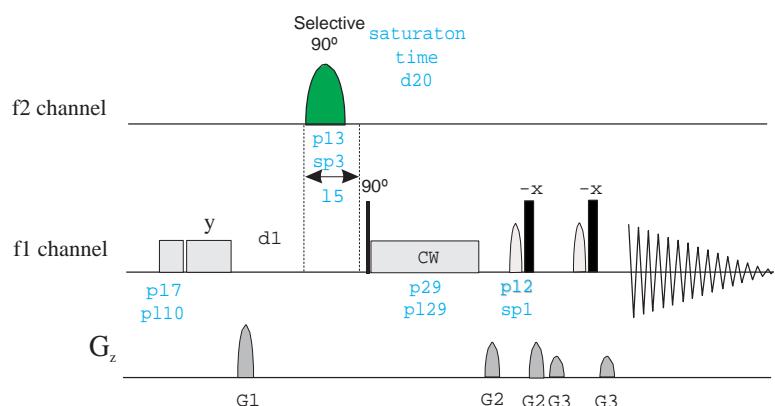


stdmlevph

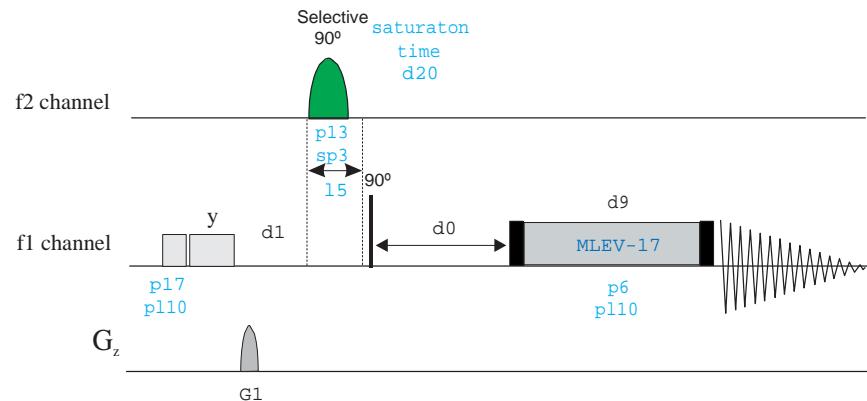


stdmlevgpph19

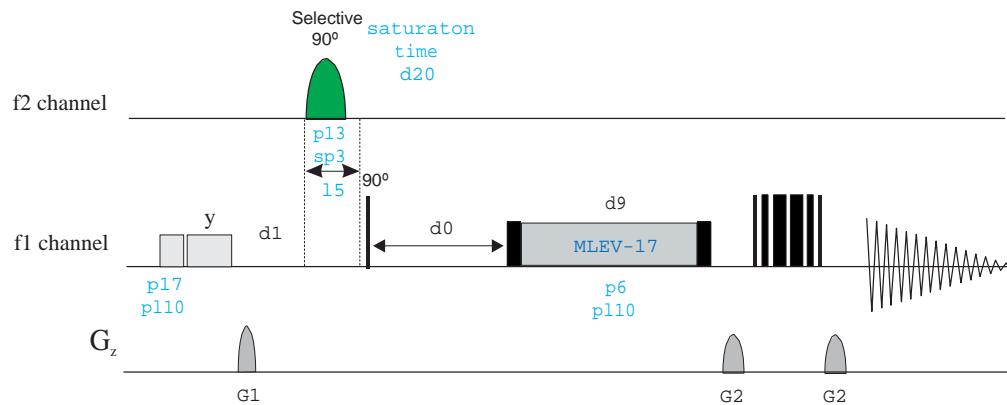


stdmlevesgpph

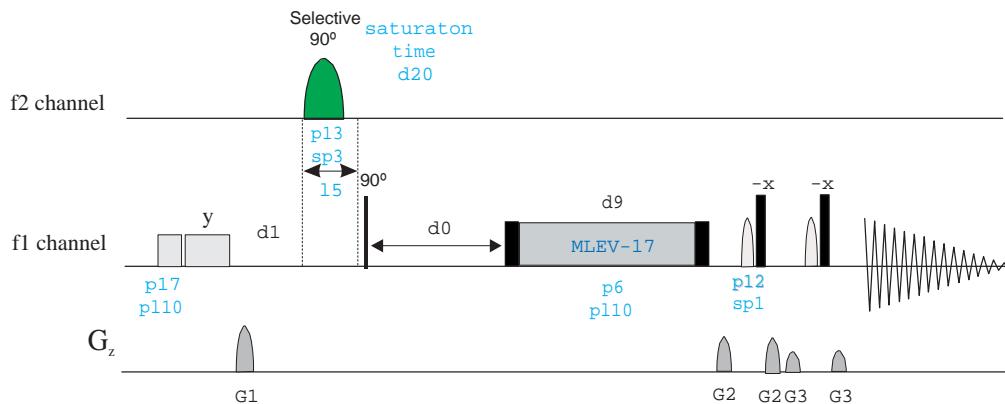


stdnoesygpph

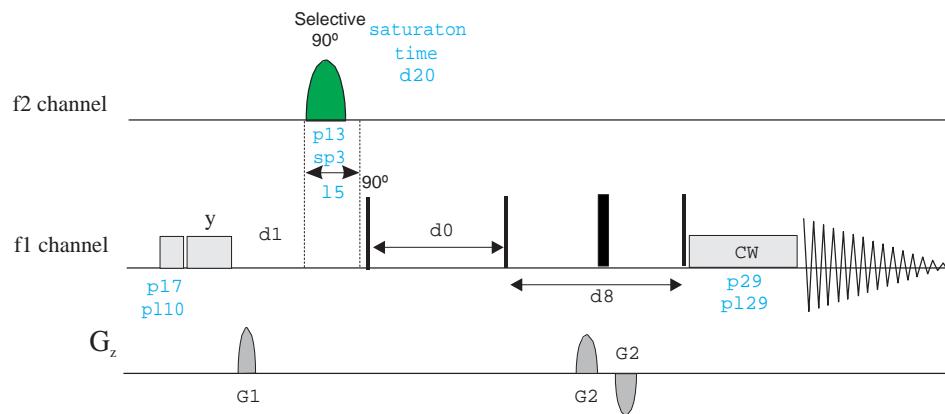


stdnoesygpph.2


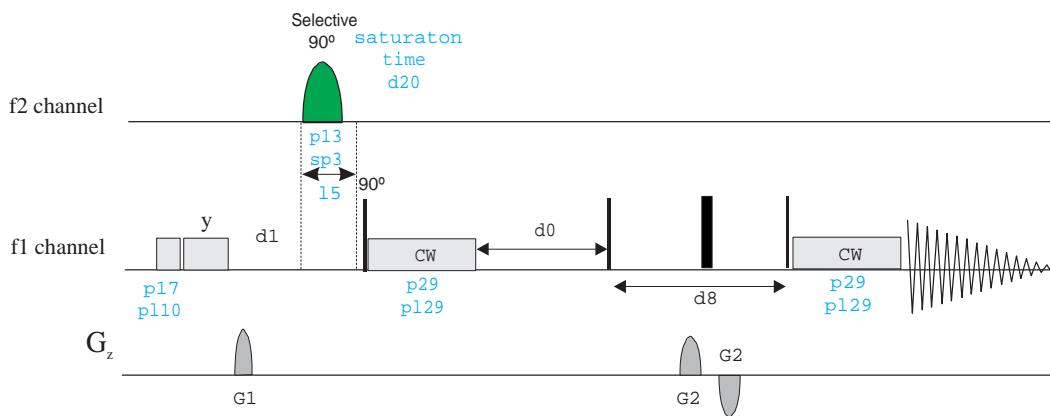




stdnoesygpph19

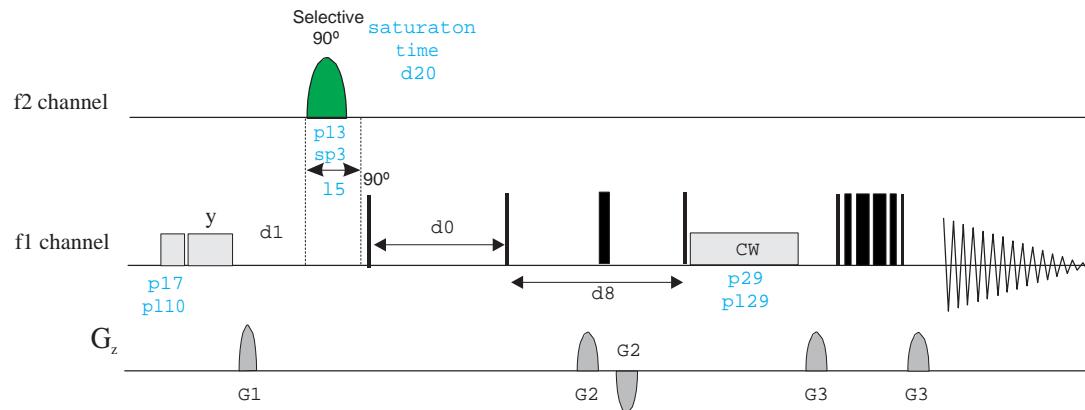

stdnoesygpph19.2

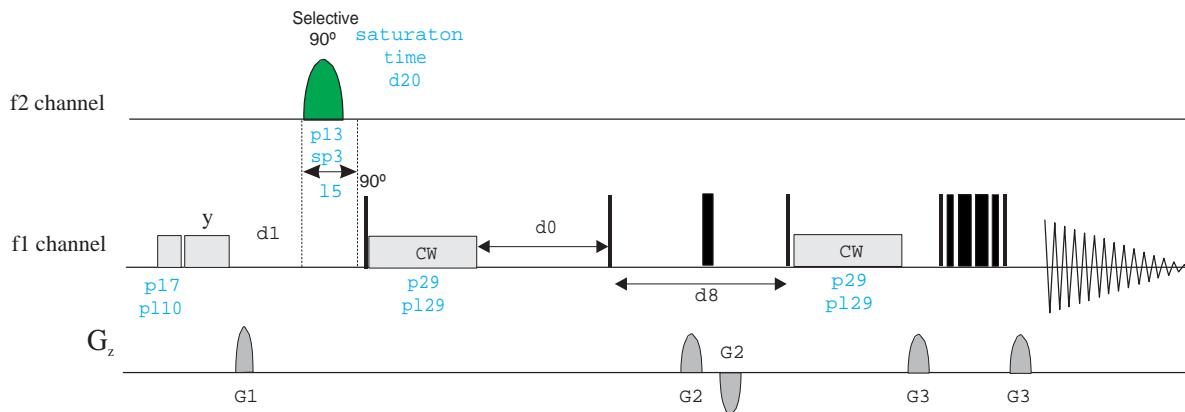

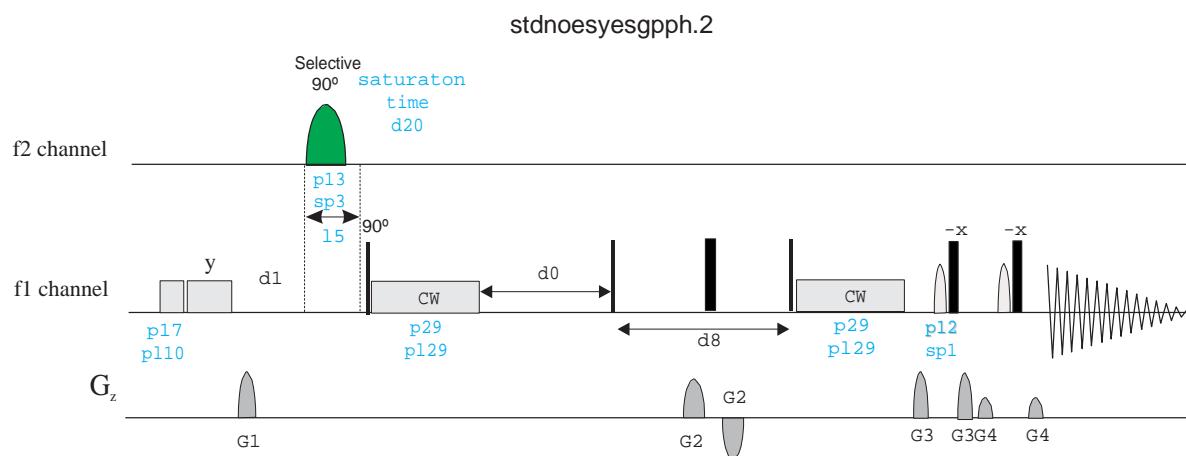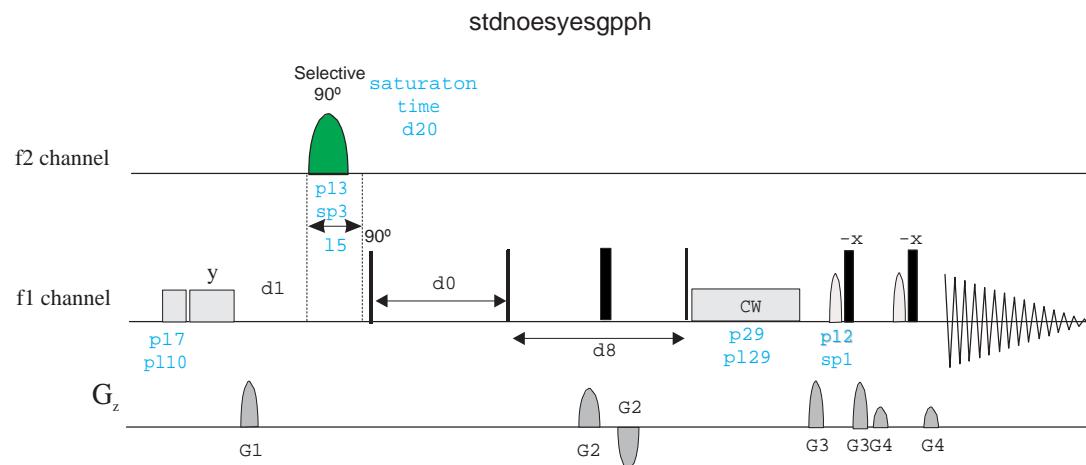

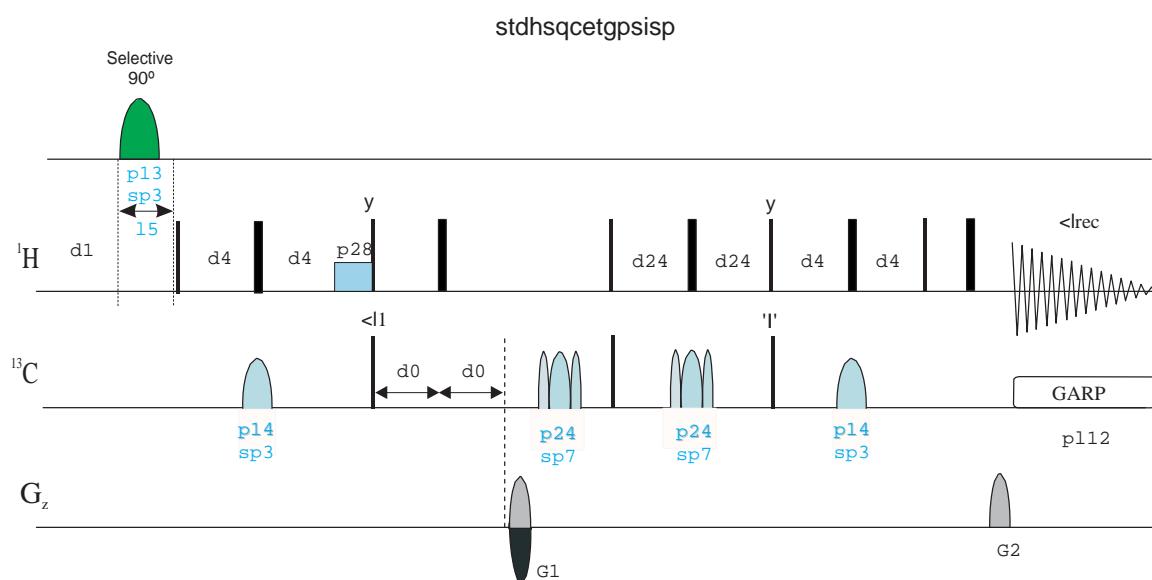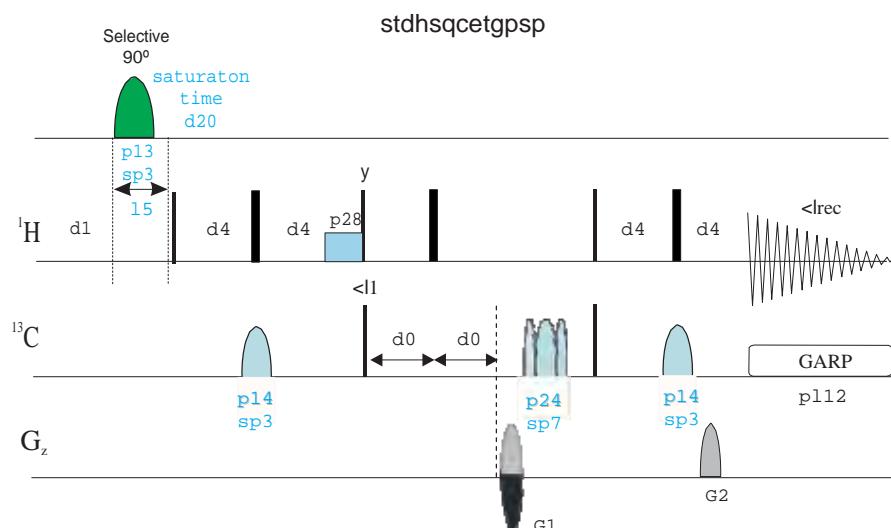


BRUKER PULSE PROGRAM CATALOGUE

NMRGuide


CLEANEX EXPERIMENTS

1D CLEANEX using 3-9-19 WATERGATE (zgcxgp19)
1D CLEANEX using excitation sculpting (zgcxesgp)
2D CLEANEX-Fast HSQC using 3-9-19 WATERGATE (fhsqccxf3gpph)
2D CLEANEX-TROSY using 3-9-19 WATERGATE (trosycxf3gpphs19)


zgcxgp19

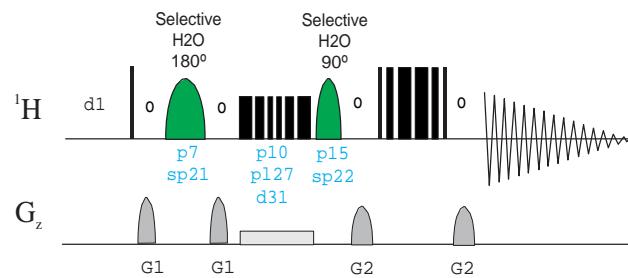


zgcxesgp

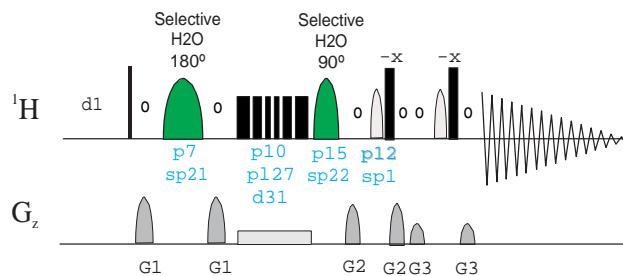

fhsqccxf3gpph

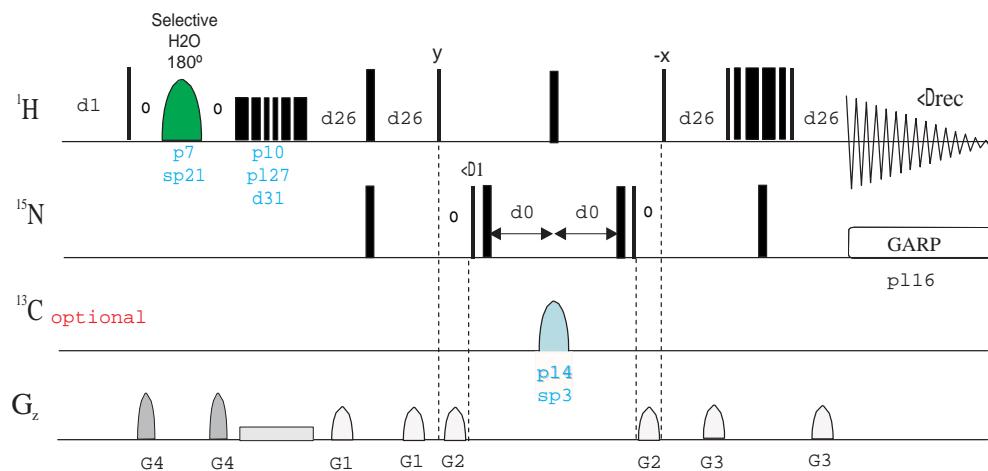

troscopyxf3gpphs19

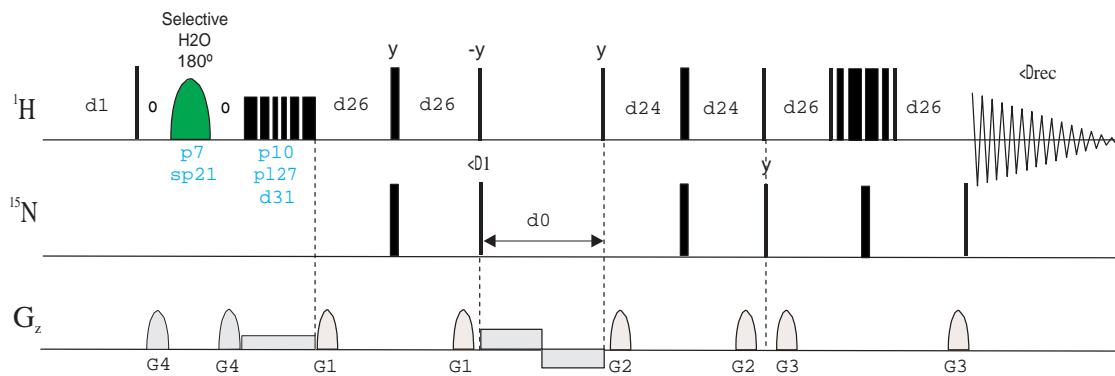

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

LC-NMR EXPERIMENTS

1D ^1H spectrum

- 1D ^1H with double presaturation (lc1prf2 | LC1D12)
- 1D ^1H with triple presaturation (lc1prft)
- 1D ^1H with WET (wet)
- 1D ^1H with WET and CW decoupling on f2 during WET and ACQ (wetdc | LC1DWTDC)
- 1D ^1H with WET and CW decoupling on f2 during WET (wetdw)
- 1D ^1H WET solvent suppression with shape pulse and C-13 decoupling on f2 during WET and AQ for LC isocratic runs (lc2wetdc)
- 1D ^1H WET solvent suppression with shape pulse and C-13 decoupling on f2 during WET and AQ with intermediate preparation scan into second dataset for LC gradient runs with updated shapes (lc2wetdcus | LC2DWTUS)

1D NOESY

- 1D NOESY with presaturation (noesypr1d)
- 1D NOESY with presaturation and CW decoupling on f2 (lc1pnchw)
- 1D NOESY with double presaturation and CW decoupling on f2 (lc1pnchwfd)
- 1D NOESY with presaturation using shaped pulse and CW decoupling on f2 (lc1pnchwps)
- 1D NOESY with double presaturation (lc1pnf2)
- 1D NOESY with multiple presaturation (lc1pnfr)
- 1D NOESY with triple presaturation (lc1pnft)
- 1D NOESY with presaturation using shaped pulse (lc1pnps)

Pseudo-2D-sequence

- Pseudo-2D-sequence for lc-nmr on flow detection (lc2)
- Pseudo-2D-sequence for lc-nmr on flow detection with power-gated decoupling (lc2pg)
- Pseudo-2D-sequence for lc-nmr on flow detection with presaturation (lc2pn)
- Pseudo-2D-sequence for lc-nmr on flow detection with double presaturation (lc2pnf2)
- Pseudo-2D-sequence for lc-nmr on flow detection with solvent gradients (lc2pnf2ul)
- Pseudo-2D-sequence for lc-nmr on flow detection with solvent gradients (lc2pnpl)
- Pseudo-2D-sequence for lc-nmr on flow detection (lc2pnps)
- Pseudo-2D-sequence for lc-nmr on flow detection with solvent gradients (lc2pnul)
- Pseudo-2D-sequence for lc-nmr on flow detection with presaturation (lc2pr)
- Pseudo-2D-sequence for lc-nmr on flow detection with double presaturation (lc2prf2)
- Pseudo-2D-sequence for lc-nmr on flow detection with presaturation using shape pulse (lc2ps)

2D homonuclear J-resolved

- 2D J-resolved with double presaturation and cw-decoupling on f2 (lcjrescwfdprqf)
- 2D J-resolved with presaturation and cw-decoupling on f2 (lcjrescwprqf)
- 2D J-resolved with presaturation using shape pulse and cw-decoupling on f2 (lcjrescwpsqf)
- 2D J-resolved with double presaturation (lcjresf2prqf)
- 2D J-resolved with presaturation (lcjresprqf)
- 2D J-resolved with presaturation using shape pulse (lcjrespsqf)

2D TOCSY

- 2D TOCSY with double presaturation and cw-decoupling on f2 (lcmlevcwfdpcph)
- 2D TOCSY with presaturation and cw-decoupling on f2 (lcmlevcwpcphs)
- 2D TOCSY with double presaturation using composite pulse (lcmlevf2pcph)
- 2D TOCSY with double presaturation (lcmlevf2phpr | LCML12)

- 2D TOCSY with presaturation using shape pulse and composite pulse (lcmlevpcphps)
- 2D TOCSY with presaturation using composite pulse (lcmlevpcph)

2D Experiments using WET

- 2D COSY using WET (cosydcphwt | COSYDCPHWT)
- 2D TOCSY using WET (mlevdcphwt | MLEVDCPHWT)
- 2D HSQC using WET (hsqcetgpsiwt | HSQCETGPSIWT)


2D Experiments using single/multiple presaturation using shape pulse

- Phase-sensitive 2D COSY using using single/multiple presaturation (cosycwphps | COSYCWPBPS)
- Phase-sensitive 2D HSQC using using single/multiple presaturation (hsqcphps)
- 2D HMBC using using single/multiple presaturation (hmbcndpsqf)


Related experiments:

- Also see 1D Solvent suppression


lc2




lc2pr



lc2ps




lc2pg









lc1prf2

lc2prf2

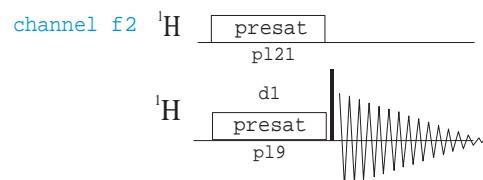


lc1prft

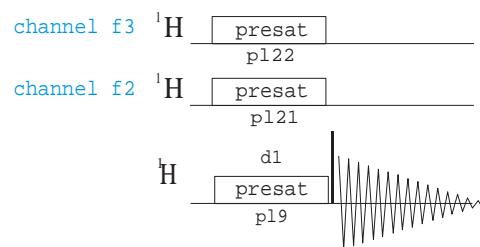


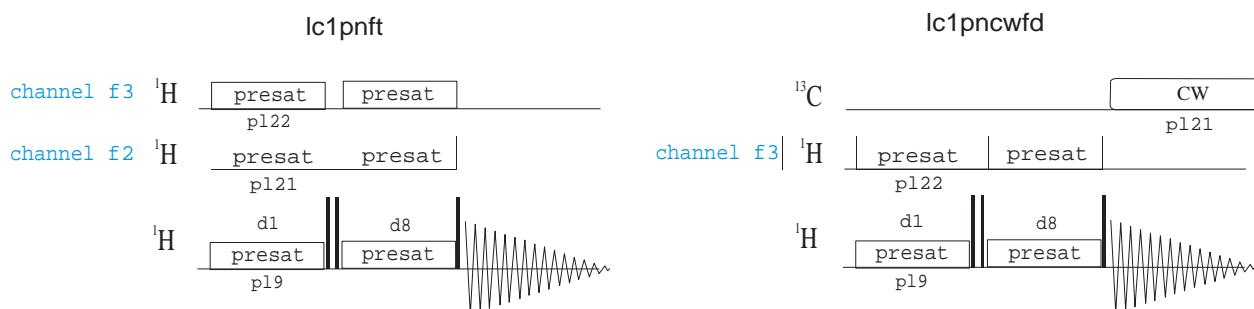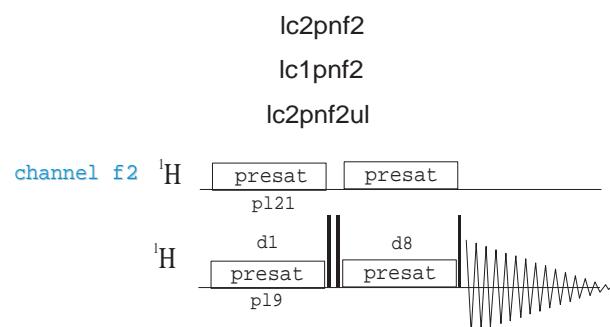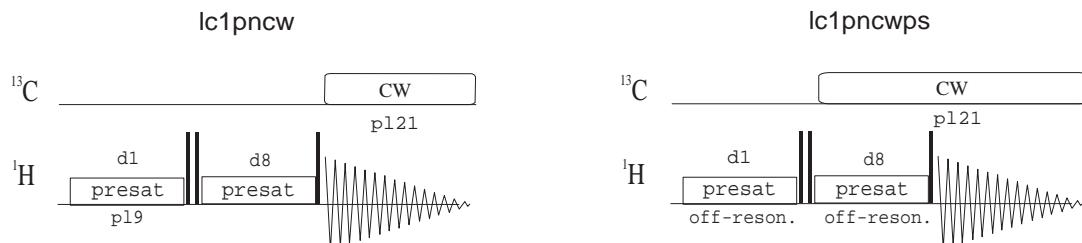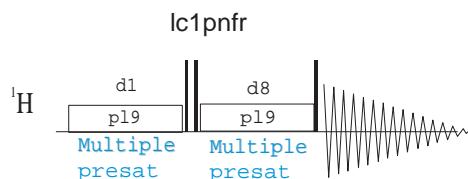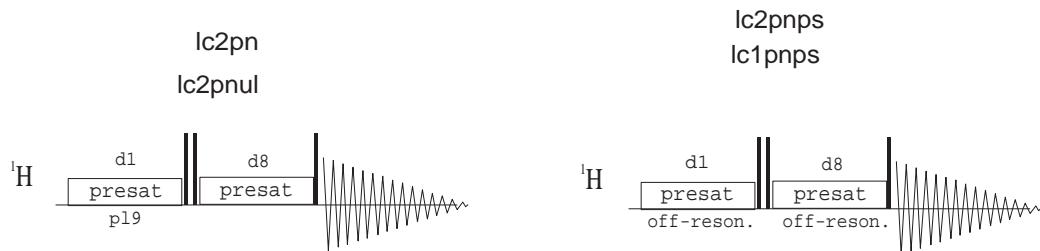


lcjrescwprqf

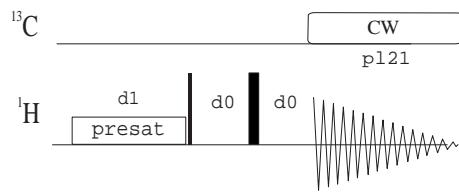


lcjrescwpsqf

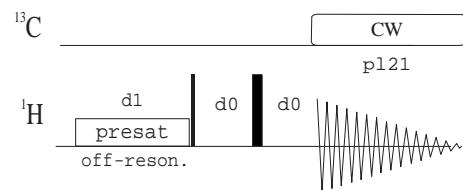


lcjresf2prqf

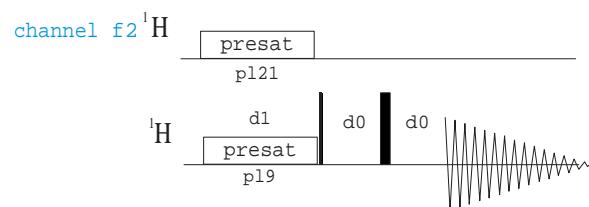


lcjrescwfdprqf

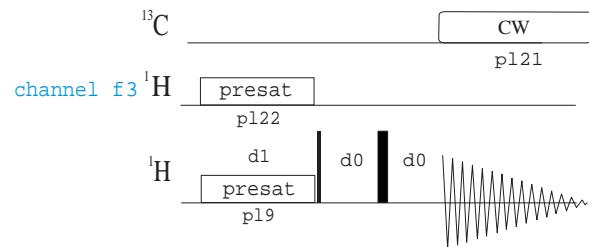


lcmlevpcph

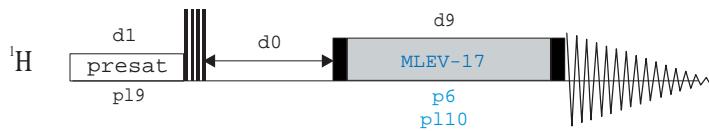


lcmlevpcphps

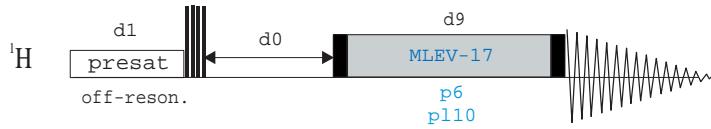


lcmllevf2phpr

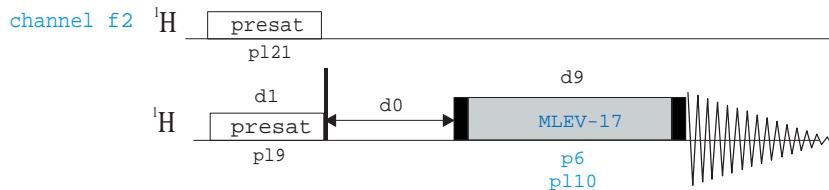


lcmllevf2pcph

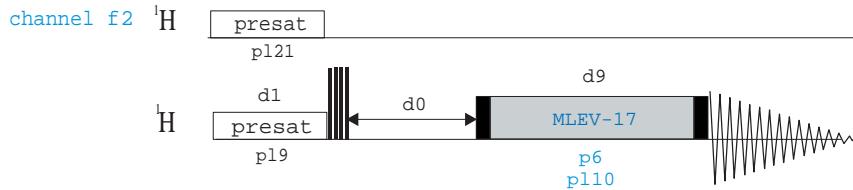


lcmllevcwpcphps

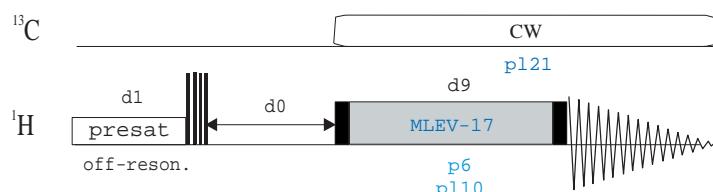


lcmllevcwfdpcph

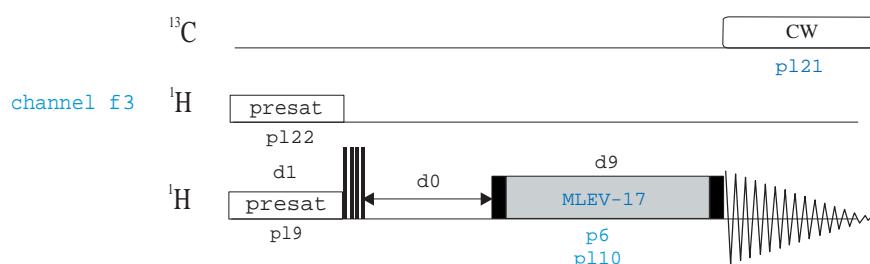


cosydcphwt

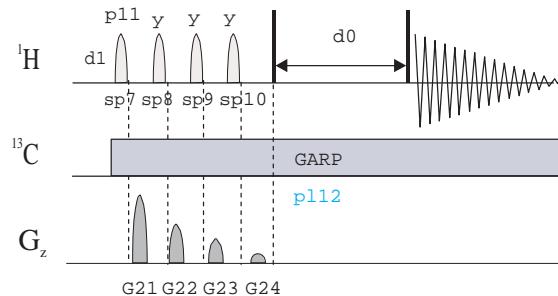

mlevdcphwt

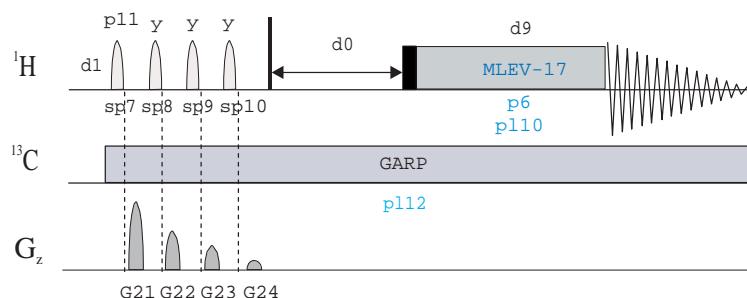

hsqcetgpsiwt

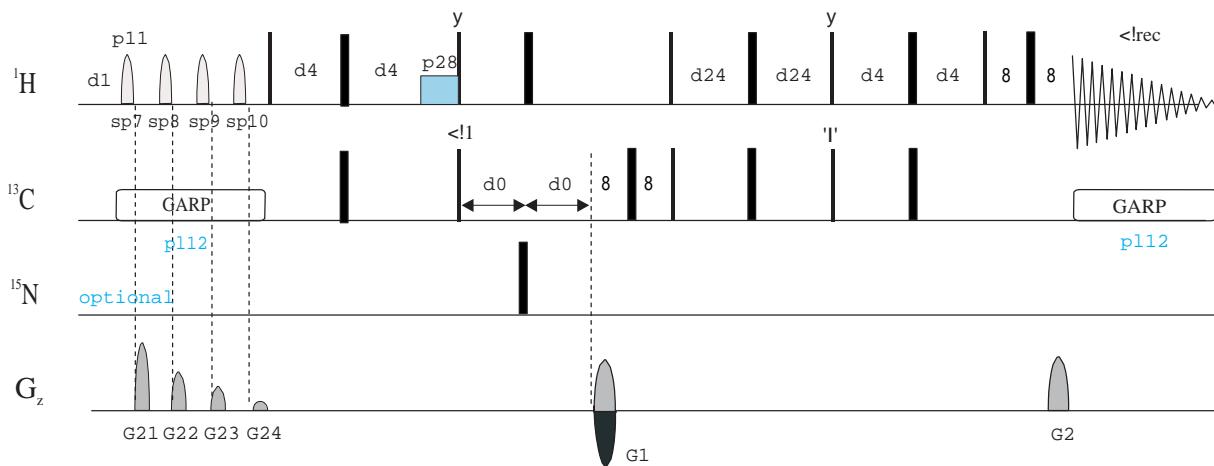


BRUKER PULSE PROGRAM CATALOGUE

NMRGuide


BASIC SOLID-STATE
NMR EXPERIMENTS

1D one-pulse High power decoupling (hpdec)
 1D CP (cp)
 1D CP (cpnqs)
 1D Sideband suppression with SELTICS (cpseltics)
 1D CPMAS with total sideband suppression using TOSS (cptossa)
 1D CPMAS with total sideband suppression using TOSS (cptossb)


hpdec




cp

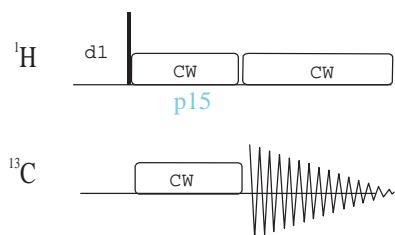

cpnqs

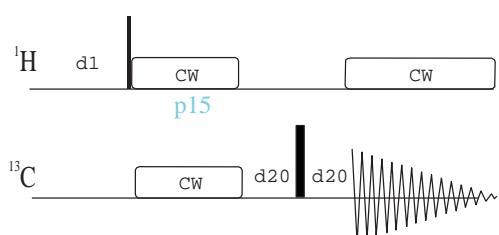


cpseltics

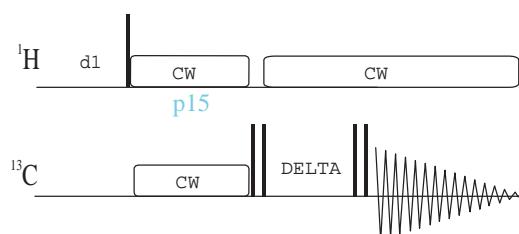

cptossb

cptossa

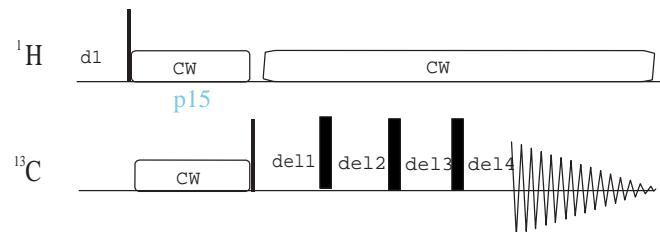

BRUKER PULSE PROGRAM CATALOGUE

NMRGuide

APPENDIX

```
;Pulprog.info
;avance-version (05/05/02)
;
;${CLASS=HighRes Info
;${COMMENT=

;For a pulseprogram the first characters (usually up to 6, but
;sometimes more) specify the type of experiment, e.g. DEPT, COSY,
;NOESY etc.. Further properties of the pulseprogram are
;indicated by a two-character code, which is added to the name
;in alphabetical order. For 2D experiments the mode (absolute value,
;phase sensitive or echo-antischo) is always indicated. H- or X-
;decoupling is assumed to be default for heteronuclear experiments,
;but not for homonuclear ones (except inad).
;In case of redundant information some two-character codes may be
;ommitted.
;
;The two-character codes used are the following:

;ar experiment for aromatic residues
;at adiabatic TOCSY
;bi with bird pulse for homonuclear J-decoupling
;bp using bipolar gradients
;cc cross correlation experiment
;cp with composite pulse
;ct constant time
;cw decoupling using cw command
;cx using CLEANEX_PM
;dc decoupling using cpd command
;df double quantum filter
;di with DIPSI mixing sequence
;dh homonuclear decoupling in indirect dimension
;dw decoupling using cpd command only during wet sequence
;dq double quantum coherence
;ea phase sensitive using Echo/Antiecho method
;ec with E.COSY transfer
;ed with multiplicity editing
;es excitation sculpting
;et phase sensitive using Echo/Antiecho-TPPI method
;fb using f2 - and f3 - channel
;fd using f1 - and f3 - channel (for presaturation)
;fr with presaturation using a frequency list
;ft using f1 -, f2 - and f3 - channel (for presaturation)
;fh F-19 observe with H-1 decoupling
;fp using a flip-back pulse
;fl for F-19 ecoupler
;f2 using f2 - channel (for presaturation)
;f3 using f3 - instead of f2 - channel
;f4 using f4 - instead of f2 - channel
;gd gated decoupling using cpd command
;ge gradient echo experiment
;gp using gradients with ":gp" syntax
;gr using gradients
;gs using shaped gradients
;hb hydrogen bond experiment
;hc homodecoupling of a region using a cpd-sequence
;hd homodecoupling
;hf H-1 observe with F-19 decoupling
;hs with homospoil pulse
;ia InPhase-AntiPhase (IPAP) experiment
;ig inverse gated
;ii using inverse (invi/HSQC) sequence
;im with incremented mixing time
;i4 using inverse (inv4/HMQC) sequence
;jc for determination of J coupling constant
;jd homonuclear J-decoupled
;jr with jump-return pulse
;lpc with low-pass J-filter
;lq with Q-switching (low Q)
;lrc for long-range couplings
;l2 with two-fold low-pass J-filter
;mf multiple quantum filter
;m1 with MLEV mixing sequence
```

```
;mq    using multiple quantum
;nd    no decoupling
;no    with NOESY mixing sequence
;pc    with presaturation and composite pulse
;pg    power-gated
;ph    phase sensitive using States-TPPI, TPPI, States or QSEC
;pl    preparing a frequency list
;pn    with presaturation using a 1D NOESY sequence
;pp    using purge pulses
;pr    with presaturation
;ps    with presaturation using a shaped pulse
;qf    absolute value mode
;qn    for QNP-operation
;qs    phase sensitive using qseq-mode
;rd    refocussed
;rl    with relay transfer
;rs    with radiation damping suppression using gradients
;ru    using radiation damping compensation unit
;rv    with random variation
;r2    with 2 step relay transfer
;r3    with 3 step relay transfer
;se    spin echo experiment
;sh    phase sensitive using States et al. method
;si    sensitivity improved
;smt   simultaneous evolution of X and Y chemical shift
;sp    using a shaped pulse
;sq    using single quantum
;ss    spin-state selective experiment
;st    phase sensitive using States-TPPI method
;sy    symmetric sequence
;s3    S3E experiment
;tf    triple quantum filter
;tp    phase sensitive using TPPI
;tr    using TROSY sequence
;tz    zeroquantum (ZQ) TROSY
;ul    using a frequency list
;us    updating shapes
;wg    watergate using a soft-hard-soft sequence
;wt    with WET watersuppression
;w5    watergate using W5 pulse
;xf    x-filter experiments
;xy    with XY CPMG sequence
;x1    x-filter in F1
;x2    x-filter in F2
;x3    x-filter in F3
;zf    with z-filter
;zq    zero quantum coherence
;zs    using a gradient/rf spoil pulse
;ld    1D version
;ls    using 1 spoil gradients
;l1    using 1-1 pulse
;l9    using 3-9-19 pulse
;2h    using 2H lockswitch unit
;2s    using 2 spoil gradients
;3d    3D sequence
;3s    using 3 spoil gradients
;30    using a 30 degree flip angle
;45    using a 45 degree flip angle
;90    using a 90 degree flip angle
;135   using a 135 degree flip angle

;Typical experiment names would be:
;  cosy, dept, dipsi2, hmhc, hmqc, hoesy, hsqc, inad, inept,
;  mlev, noesy, roesy or trosy.

;Inverse correlations are denoted as hmhc, hmqc or hsqc.
;  Experiments with a BIRD sequence in the beginning
;  also contain a bi in the name.

;1D experiments, which are analogues of 2D experiments by virtue of
;  a selective pulse, start with sel.
;Semiselective 2D experiments have the same name as the unselective
```

```
; version but with an s at the beginning:  
;  
; scosyph <-> cosyph.  
  
;A phase-sensitive (States-TPPI, TPPI etc.) NOESY experiment with  
; presaturation would then be:  
;  
; noesy + ph + pr = noesyphpr.  
  
;In the other direction the pulseprogram hmbcgplpndqf would be  
;  
; hmbc + gp + lp + nd + qf  
;  
; and therefor an:  
;  
; inverse correlation for long-range couplings (HMBC) with  
; coherence selection using gradients with ":gp" syntax,  
; low-pass J-filter,  
; no decoupling  
; in absolute value mode.  
  
;  
;The nomenclature of parameters is described in Pulprog.info.  
  
;Comments like:  
;  
; avance-version  
; begin ____  
; end ____  
;  
; with (____ = MLEV17, DIPSI2, ...)  
;  
;are evaluated by NMRSIM for the pulseprogram display and should  
;therefor not be removed. The syntax for begin/end statements allows  
;characters, numbers and '_'. Arithmetic operators must not be used.  
;  
;  
;The comments:  
; ;preprocessor-flags-start  
; ;preprocessor-flags-end  
;  
;are also evaluated to identify flags used in the pulseprogram and  
;must also not be removed.  
  
;$Id: $
```

```

;Param.info
;avance-version (05/10/24)
;
;The following convention is used for power levels, pulses, delays
;and loop counters throughout the microprograms:
;
;${CLASS=HighRes Info
;${COMMENT=


;p10 :
;p11 : f1 channel - power level for pulse (default) {all, PL90[F1]}
;p12 : f2 channel - power level for pulse (default) {all, PL90[F2]}
;p13 : f3 channel - power level for pulse (default) {all, PL90[F3]}
;p14 : f4 channel - power level for pulse (default) {all, PL90[F4]}
;p15 : f5 channel - power level for pulse (default) {}
;p16 : f6 channel - power level for pulse (default) {}
;p17 : f7 channel - power level for pulse (default) {}
;p18 : f8 channel - power level for pulse (default) {}
;p19 : f1 channel - power level for presaturation
{default+lcnmr+triple+triple2+triple_na, PLCW[F1]} {all, PLTOC[F1]}
;p110: f1 channel - power level for TOCSY-spinlock {all, PLROE[F1]}
;p111: f1 channel - power level for ROESY-spinlock {all, PLCPDP[F2]}
;p112: f2 channel - power level for CPD/BB decoupling {default+lcnmr+triple_c,
PLCPD2[F2]}
;p113: f2 channel - power level for second CPD/BB decoupling
{triple+triple2, PLSH13[F2]}
{default, PLNOE[F2]}
{triple+triple2, PLCW[F2]}
{lcnmr, PLUSER1[F2]}
{all, PLTOC[F2]}
{all, PLCPDP[F3]}
{all, PLCPDP[F4]}

; or f2 channel - power level for Cbeta/CO decoupling
;p114: f2 channel - power level for cw saturation
; or f2 channel - power level for cw saturation
; or f2 channel - power level for low power decoupling
;p115: f2 channel - power level for TOCSY-spinlock
;p116: f3 channel - power level for CPD/BB decoupling
;p117: f4 channel - power level for CPD/BB decoupling
;p118: f1 channel - power level for 3-9-19-pulse (watergate)
{default+lcnmr+triple+triple2+triple_na, PL90[F1]}
;p119: f1 channel - power level for CPD/BB decoupling
{default+lcnmr+triple+triple2+triple_na, PLCPDP[F1]}
;p120: f1 channel - power level for Dante-z pulse
; or f2 channel - power level for TOCSY-spinlock (higher sel.)
;p121: f2 channel - power level for presaturation
;p122: f3 channel - power level for presaturation
; or f3 channel - power level for TOCSY-spinlock (higher sel.)
;p123: f3 channel - power level for TOCSY-spinlock
{default+lcnmr+triple+triple_c, PLTOC[F3]}
; or f3 channel - power level for Rexchange spinlock
; or f3 channel - power level for TOCSY-spinlock
;p124: f2 channel - power level for hd/hc decoupling
;p125: f1 channel - power level for TOCSY spinlock (higher sel.)
; or f3 channel - power level for T1rho spinlock
;p126: f2 channel - power level for cw decoupling
; or f2 channel - power level for TOCSY spinlock (higher sel. II)
;p127: f1 channel - power level for pulsed ROESY-spinlock
; or f1 channel - power level for cleanex spinlock
; or f2 channel - power level for TOCSY spinlock (higher sel. III)
;p128: f2 channel - power level for selective Ca or CO decoupling
; or f2 channel - power level for selective decoupling
;p129: f2 channel - power level for simultaneous Ca and CO decoupling
;p130: f2 channel - power level for biley decoupling
{default+triple+triple2+triple_na, PLCPDP[F2]}
;p131: f2 channel - power level for biley decoupling
{default+triple+triple2+triple_na, PLUSER2[F2]}

;sp0 : f1 channel - shaped pulse 180 degree (adiabatic TOCSY)
; or f2 channel - shaped pulse 180 degree (two-fold modulated)
;sp1 : f1 channel - shaped pulse for selective excitation
; or f1 channel - shaped pulse for water flipback
{triple+triple2+triple_na, PLSH8[F1]}
;sp2 : f1 channel - shaped pulse 180 degree
; or f2 channel - shaped pulse 90 degree (on resonance)
PLSH4[F2]
; or f2 channel - shaped pulse 90 degree (on resonance)
;sp3 : f2 channel - shaped pulse 180 degree (adiabatic)
; or f2 channel - shaped pulse 180 degree (on resonance)
PLSH6[F2]
{} {triple_na, PLSH7U[F2]}
{default, PLSH1[F1]}

{} {default, PLSH2[F1]}
{triple+triple2,
{triple_na, PLSH1U[F2]}
{default, PLSH3[F2]}
{triple+triple2,

```

```

; or   f2 channel - shaped pulse 180 degree (on resonance)
;sp4 : f2 channel - shaped pulse 90 degree (off resonance)
PLSH4[F2]
;sp5 : f2 channel - shaped pulse 180 degree (off resonance)
PLSH6[F2]
; or   f2 channel - shaped pulse 180 degree (off resonance)
;sp6 : f1 channel - shaped pulse for presaturation
{default+lcnmr+triple+triple2+triple_na, PLSH7[F1]}
;sp7 : f1 channel - shaped pulse for wet
; or   f1 channel - shaped pulse 180 degree (adiabatic)
; or   f2 channel - shaped pulse 180 degree (adiabatic)
; or   f2 channel - shaped pulse 180 degree (off resonance2)
PLSH6[F2]
; or   f2 channel - shaped pulse 180 degree (off resonance2)
;sp8 : f1 channel - shaped pulse for wet
; or   f2 channel - shaped pulse 90 degree (on res., time reversed)
PLSH5[F2]
; or   f2 channel - shaped pulse 90 degree (on res., time reversed)
;sp9 : f1 channel - shaped pulse for wet
; or   f2 channel - shaped pulse 180 degree (higher selectivity)
PLSH9[F2]
; or   f3 channel - shaped pulse 180 degree (on resonance)
;sp10: f1 channel - shaped pulse for tilted ROESY
; or   f1 channel - shaped pulse for wet
; or   f2 channel - shaped pulse 90 degree (higher selectivity)
PLSH7[F2]
; or   f2 channel - shaped pulse 90 degree (higher selectivity)
;sp11: f1 channel - shaped pulse for wet2
; or   f1 channel - shaped pulse for water flipback
; or   f1 channel - shaped pulse for water flipback2
{triple+triple2+triple_na, PLSH9[F1]}
; or   f2 channel - shaped pulse for water flipback
;sp12: f1 channel - shaped pulse for wet2
; or   f2 channel - shaped pulse 90 degree (higher sel., time rev.)
PLSH8[F2]
; or   f2 channel - shaped pulse 90 degree (higher sel., time rev.)
;sp13: f1 channel - shaped pulse for wet2
; or   f1 channel - shaped pulse 180 degree (adiabatic)
; or   f2 channel - shaped pulse 180 degree (adiabatic)
{triple+triple2+triple_na, PLSH3[F2]}
;sp14: f1 channel - shaped pulse for wet2
; or   f2 channel - shaped pulse 180 degree (adiabatic bilev decoupling)
PLSH12[F2]
; or   f3 channel - shaped pulse 180 degree (adiabatic)
;sp15: f2 channel - shaped pulse 180 degree for decoupling (Ca or CO)
; or   f2 channel - shaped pulse 180 degree for decoupling (Cbeta)
; or   f2 channel - shaped pulse 180 degree for decoupling (C')
;sp16: f2 channel - shaped pulse 180 degree (higher sel., off res.)
PLSH9[F2]
;sp17: f2 channel - shaped pulse 180 degree (higher sel., off res.)
PLSH9[F2]
;sp18: f2 channel - shaped pulse 180 degree (adiabatic matched sweep)
PLSH15[F2]
;sp19: f1 channel - shaped pulse for wet
; or   f2 channel - shaped pulse 90 degree (NH)
; or   f3 channel - shaped pulse 90 degree (T1rho, adiabatic ramp up)
;sp20: f1 channel - shaped pulse for wet
; or   f2 channel - shaped pulse 90 degree (NH, time reversed)
; or   f3 channel - shaped pulse 90 degree (T1rho, adiabatic ramp down)
;sp21: f1 channel - shaped pulse for wet
; or   f1 channel - shaped pulse 180 degree (cleanex, H2O)
;sp22: f1 channel - shaped pulse for wet
; or   f1 channel - shaped pulse 90 degree (cleanex, H2O)
; or   f1 channel - shaped pulse 180 degree (off resonance)
;sp23: f1 channel - shaped pulse 90 degree (on resonance)
; or   f1 channel - shaped pulse 180 degree (off resonance)
;sp24: f1 channel - shaped pulse 180 degree (on resonance)
; or   f1 channel - shaped pulse 180 degree (off resonance2)
;sp25: f1 channel - shaped pulse 90 degree (on res., time reversed)
; or   f2 channel - shaped pulse 180 degree (higher selectivity)
;sp26: f1 channel - shaped pulse 180 degree (off resonance)
;sp27: f1 channel - shaped pulse 180 degree (off resonance)
;sp28: f1 channel - shaped pulse 180 degree (higher selectivity)
;sp29: f1 channel - shaped pulse 180 degree (off resonance)
; or   f1 channel - shaped pulse 180 degree (adiabatic sweep: z-spoil)
{triple_na, PLSH3U[F2]}
{triple+triple2,
{triple+triple2,
{triple_na, PLSH3U[F2]}
{lcnmr, PLSH3[F1]+0.87}
{triple_c, PLSH13[F1]}
{default, PLSH2[F2]}
{triple+triple2,
{triple_na, PLSH3U[F2]}
{lcnmr, PLSH3[F1]-1.04}
{triple+triple2,
{triple_na, PLSH2U[F2]}
{lcnmr, PLSH3[F1]+2.27}
{triple+triple2,
{triple_na, PLSH1U[F3]}
{}
{lcnmr, PLSH3[F1]-5.05}
{triple+triple2,
{triple_na, PLSH4U[F2]}
{}
{default, PLSH8[F1]}
{triple_c, PLSH16[F2]}
{}
{triple+triple2,
{triple_na, PLSH5U[F2]}
{}
{triple_c, PLSH12[F1]}
{}
{triple_na, PLSH2U[F3]}
{triple, PLSH10[F2]}
{triple2, PLSH13[F2]}
{triple_na, PLSH6U[F2]}
{triple+triple2,
{triple+triple2,
{triple_na, PLSH3[F1]+2.27}
{triple2, PLSH11[F1]}
{default, PLSH3[F1]-5.05}
{triple2, PLSH10[F1]}
{triple_c, PLSH6[F1]}
{triple_c, PLSH4[F1]}
{triple_na, PLSH1U[F1]}
{triple_c, PLSH6[F1]}
{triple_na, PLSH1U[F1]}
{triple_c, PLSH5[F1]}
{triple_na, PLSH6U[F2]}
{triple_c, PLSH6[F1]}
{triple_c, PLSH6[F1]}
{triple_c, PLSH14[F1]}
{triple_c, PLSH6[F1]}
{triple_c, PLSH16[F1]}

```

```

;sp30: f1 channel - shaped pulse 180 degree (sim. Ca + CO) {triple_c, PLSH15[F1]}
; or f2 channel - shaped pulse 180 degree for decoupling (sim. Ca + CO) {triple2, PLSH14[F2]}
;sp31: f2 channel - shaped pulse 180 degree (adiabatic biley decoupling)
{default+triple+triple2+triple_na, PLSH11[F2]}

;p0 :
;p1 : f1 channel - 90 degree high power pulse {all, P90[F1]}
;p2 : f1 channel - 180 degree high power pulse {all, P90[F1]*2}
;p3 : f2 channel - 90 degree high power pulse {all, P90[F2]}
;p4 : f2 channel - 180 degree high power pulse {all, P90[F2]*2}
;p5 : f1 channel - 60 degree low power pulse {all, PTOC[F1]*0.66}
;p6 : f1 channel - 90 degree low power pulse {all, PTOC[F1]}
;p7 : f1 channel - 180 degree low power pulse {all, PTOC[F1]*2}
{default+lcnmr+triple+triple_c, PTOC[F1]*2}
; or f1 channel - 180 degree shaped pulse (cleanex sel. H2O) {triple2, PSH11[F1]}
; or f2 channel - 90 degree pulse at p120 (TOCSY, higher sel.) {triple_na, PUSER5[F2]}
;p8 : f2 channel - 60 degree low power pulse {}
; or f1 channel - 90 degree shaped pulse (wet) {default, PSH3[F1]}
; or f1 channel - 180 degree shaped pulse (adiabatic) {triple_c, PSH12[F1]}
; or f2 channel - 180 degree shaped pulse (adiabatic) {triple+triple2+triple_na, PSH3[F2]}
{PSH3[F2]}

;p9 : f2 channel - 90 degree low power pulse (TOCSY) {all, PTOC[F2]}
;p10: f1 channel - 90 degree low power pulse (cleanex spinlock) {triple2, PUSER1[F1]}
; or f2 channel - 180 degree low power pulse {triple_na, PSH11U[F1]}
{default+lcnmr+triple+triple_c, PTOC[F2]*2}
; or f2 channel - 180 degree shaped pulse (higher selectivity) {triple_na, PSH6U[F2]}
;p11: f1 channel - 90 degree shaped pulse (selective excitation) {default, PSH1[F1]}
; or f1 channel - 90 degree shaped pulse (selective excitation) {triple_c, PSH4[F1]}
; or f1 channel - 90 degree shaped pulse (wet) {lcnmr, PSH3[F1]}
; or f1 channel - 90 degree shaped pulse (water flipback/watergate) {triple+triple2+triple_na, PSH8[F1]}
{PSH8[F1]}

;p12: f1 channel - 180 degree shaped pulse (H, selective) {default+lcnmr, PSH2[F1]}
; or f1 channel - 180 degree shaped pulse (C, adiabatic) {default+lcnmr, PSH2[F1]*2}
; or f1 channel - 180 degree shaped pulse (C, selective) {triple_c, PSH6[F1]}
{triple+triple2, PSH8[F1]*2}
; or f1 channel - 180 degree shaped pulse (excitation sculpting) {triple_na, PSH1U[F1]}
; or f1 channel - 180 degree shaped pulse (H, selective) {triple+triple2, PSH4[F2]}
;p13: f2 channel - 90 degree shaped pulse {triple_na, PSH1U[F2]}
; or f2 channel - 90 degree shaped pulse {triple_c, PSH15[F2]}
; or f2 channel - 90 degree shaped pulse (H, selective) {default+lcnmr, PSH3[F2]}
;p14: f2 channel - 180 degree shaped pulse (adiabatic) {triple+triple2, PSH6[F2]}
; or f2 channel - 180 degree shaped pulse (selective) {triple_na, PSH3U[F2]}
; or f2 channel - 180 degree shaped pulse (selective) {triple_na, PSH10[F1]}
;p15: f1 channel - pulse for ROESY spinlock {triple2, PSH15[F2]}
; or f1 channel - 90 degree shaped pulse (cleanex sel. H2O) {triple_na, PSH4U[F2]}
; or f2 channel - 180 degree shaped pulse (adiabatic matched sweep) {all, P_grad1}
; or f2 channel - 90 degree shaped pulse (higher selectivity) {all, P_mlev}
;p16: homospoil/gradient pulse {triple+triple2+triple_na, PSH7[F1]}
;p17: f1 channel - trim pulse at p110 or p115 {all, P_grad2}
;p18: f1 channel - shaped pulse (off resonance presaturation) {all, P_mlev}
{default+lcnmr+triple+triple2+triple_na, PSH7[F1]}

;p19: homospoil/gradient pulse 2 {all, P_mlev}
;p20: f2 channel - trim pulse {all, P_mlev}
;p21: f3 channel - 90 degree high power pulse {all, P90[F3]}
;p22: f3 channel - 180 degree high power pulse {all, P90[F3]*2}
;p23: f2 channel - 90 degree shaped pulse (higher selectivity) {triple+triple2, PSH7[F2]}
; or f2 channel - 90 degree shaped pulse (twofold modulated) {triple_na, PSH7U[F2]}
; or f4 channel - 90 degree high power pulse {default, P90[F4]}
;p24: f1 channel - 180 degree shaped pulse (adiabatic) {triple_c, PSH13[F1]}
; or f2 channel - 180 degree shaped pulse (adiabatic) {default+lcnmr, PSH2[F2]}
; or f2 channel - 180 degree shaped pulse (higher selectivity) {triple+triple2, PSH9[F2]}
;p25: f1 channel - 90 degree pulse at p127 (pulsed ROESY) {triple_na, PUSER4[F3]}
; or f1 channel - 90 degree shaped pulse (higher selectivity) {}
; or f3 channel - pulse for t1rho experiment {default+lcnmr, PROE[F1]*2}
;p26: f1 channel - 90 degree pulse at p122 (TOCSY, higher sel.) {triple_c, PSH14[F1]}
; or f3 channel - 90 degree pulse at p123 (TOCSY) {pp}
; or f3 channel - 180 degree low power pulse (Rexchange) {triple}
;p27: f1 channel - 90 degree pulse at p118 (3-9-19 watergate) {triple_na, PUSER3[F3]}
{default+lcnmr+triple+triple2+triple_na, P90[F1]}
;p28: f1 channel - trim pulse at p119 {triple2, PUSER2[F3]*2}
;p29: f1 channel - 90 degree shaped pulse (water flipback) {triple*, PCPDP[F1]}
; or f1 channel - 90 degree shaped pulse (water flipback2) {all, P_hsqc}
{default, PSH8[F1]}
{triple+triple_na, PSH9[F1]}

```

```

; or f2 channel - 90 degree shaped pulse (water flipback)
; or f3 channel - 90 degree shaped pulse (T1rho adiabatic ramp)
; or homospoil/gradient pulse 3
;p30: f1 channel - 180 degree shaped pulse (sim. Ca + CO)
; or f2 channel - 180 degree shaped pulse (sim. Ca + CO decoupling)
; or f3 channel - 180 degree pulse at pl23
; or f3 channel - 180 degree shaped pulse
; or homospoil/gradient pulse 4
; or gradient pulse for diffusion (dosy)
;p31: f2 channel - 180 degree shaped pulse (adiabatic matched sweep)
; or f2 channel - 180 degree shaped pulse (sel. Ca or CO decoupling)
; or f2 channel - 180 degree shaped pulse (Cbeta decoupling)
; or f2 channel - 180 degree shaped pulse (sel. C decoupling)
; or f2 channel - 180 degree pulse (low power decoupling)
; or homospoil/gradient pulse 5
;p32: f1 channel - 180 degree shaped pulse (adiabatic sweep: z-spoil)
; or f3 channel - 180 degree shaped pulse (adiabatic)
;p33: f3 channel - trim pulse
;p63: f2 channel - 180 degree shaped pulse (adiabatic billev sweep)
{default+triple+triple2+triple_na, PSH11[F2]}

;d0 : incremented delay (2D or 3D) [3 usec]
;d1 : relaxation delay; 1-5 * T1
;d2 : 1/(2J)
;d3 : 1/(3J) or 1/(6J)
;d4 : 1/(4J)
;d5 : DE/2
;d6 : delay for evolution of long range couplings
;d7 : delay for inversion recovery
;d8 : NOESY mixing time
;d9 : TOCSY mixing time [all, TTOC[F1]]
;d10: incremented delay (3D)
;d11: delay for disk I/O [30 msec]
;d12: delay for power switching [20 usec]
;d13: short delay [4 usec]
;d14: delay for evolution after shaped pulse
;d15: TOCSY mixing time (CC) {triple*, TTOC[F2]}
;d16: delay for homospoil/gradient recovery {all, D_grad}
;d17: delay for DANTE pulse-train
;d18: delay for evolution of long range couplings
;d19: delay for binomial water suppression
;d20: for different applications
;d21: for different applications
;d22: 1/(2J(XY))
;d23: 1/(4J(XY)) or 1/(2J(XY))
;d24: for different applications
;d25: 1/(6J(YH)) or 1/(8J(XY))
;d26: 1/(4J(YH))
;d27: for different applications
;d28: for different applications
;d29: for different applications
;d30: for different applications
;d31: for different applications

;cnst0 : for protein experiments - N chemical shift (offset, in ppm)
; or for na experiments - calculated chemical shift (offset, in ppm)
; or for na experiments - N(aro) chemical shift (offset, in ppm) [195 ppm]
;cnst1 : J (HH)
;cnst2 : J (XH)
;cnst3 : J (XX)
;cnst4 : J (YH)
;cnst5 : J (XY)
;cnst6 : J (XH)min
;cnst7 : J (XH)max
;cnst8 : bandwidth of excitation for Dante-z pulse
;cnst9 : for different applications as J
;cnst10: for different applications as J
;cnst11: for multiplicity selection
;cnst12: for multiplicity selection
;cnst13: J (XH) long range
;cnst14: J (XH) long range (min)
;cnst15: J (XH) long range (max)
;cnst16: J-scale factor

```

```
; or      for na experiments - H6/8 and/or H1' chemical shift (offset, in ppm)
;cnst17: factor to compensate for coupling evolution during a pulse
; or      for na experiments - H1' chemical shift (offset, in ppm)
;cnst18: for protein experiments - H2O chemical shift (offset, in ppm)
; or      for na experiments - H2O chemical shift (offset, in ppm)
;cnst19: for protein experiments - H(N) chemical shift (offset, in ppm)
; or      : for na experiments - H(N) chemical shift (offset, in ppm)
;cnst20: for protein experiments - Haliphatic chemical shift (offset, in ppm)
;cnst21: for na experiments - C1' chemical shift (offset, in ppm) [90 ppm]
; or      for protein experiments - CO chemical shift (offset, in ppm)
;cnst22: for protein experiments - Calpha chemical shift (offset, in ppm)
; or      for na experiments - C6/8 chemical shift (offset, in ppm) [137 ppm]
;cnst23: for protein experiments - Caliphatic chemical shift (offset, in ppm)
; or      for na experiments - C2' chemical shift (offset, in ppm) [72 ppm]
;cnst24: for protein experiments - Caromatic chemical shift (offset, in ppm)
; or      for na experiments - C4 (C/U) chemical shift (offset, in ppm) [169 ppm]
;cnst25: for protein experiments - flag for cross peak / reference experiments
; or      for na experiments - C6 (A) chemical shift (offset, in ppm) [160 ppm]
;cnst26: for protein experiments - Call chemical shift (offset, in ppm)
; or      for na experiments - C5 (G) chemical shift (offset, in ppm) [119 ppm]
;cnst27: for protein experiments - ( Cgamma chemical shift (offset, in ppm) )
; or      for na experiments - C2/4 chemical shift (offset, in ppm) [152 ppm]
;cnst28: for protein experiments - Haromatic chemical shift (offset, in ppm)
; or      for na experiments - C5 (C/U) chemical shift (offset, in ppm) [105 ppm]
;cnst29: for protein experiments - N(H) chemical shift (offset, in ppm)
; or      for na experiments - C(aro) chemical shift (offset, in ppm) [145 ppm]
;cnst30: for protein experiments - Cbeta chemical shift (offset, in ppm)
; or      for na experiments - N(H) chemical shift (offset, in ppm) [151 ppm]
;cnst31: scaling factor
; or      for na experiments - N(H2) chemical shift (offset, in ppm) [81 ppm]

;vc : variable loop counter, taken from vc-list
;vd : variable delay, taken from vd-list

;l1 : loop for spinlock cycle
;l2 : loop for GARP cycle: l2 * 31.75 * 4 * p9 => AQ
;l3 : loop for phase sensitive 2D or 3D using
;      States et al. or States-TPPI method: l3 = td1/2
;l4 : for different applications
;l5 : for different applications
;l6 : loop for shaped pulse presaturation during relaxation delay
;l7 : loop for shaped pulse presaturation during mixing time
;l8 : number of frequencies for multiple presaturation
;l11: loop for spinlock cycle 2

;$Id: $
```

```

;Relations.info
;avance-version (05/10/24)
;
;${CLASS=HighRes Info
;${COMMENT=

;The following convention is used for power levels, pulses, delays
;and loop counters in the different relation files for prosol:
;
;all = default + lcnmr + triple + triple2 + triple_c + triple_na
;triple* = triple + triple2 + triple_c + triple_na
;!__ = except
;
;prosol par.    rel. file      pulseprogram parameter
;
;D_grad         all           d16: delay for homospoil/gradient recovery
;
;P90[F1]        all           p0 :
;P90[F1]        all           p1 : f1 channel - 90 degree high power pulse
;P90[F1]        all(!triple_c) p27: f1 channel - 90 degree pulse at pl18 (3-9-19
watergate)
;P90[F1]*2      all           p2 : f1 channel - 180 degree high power pulse
;P90[F2]        all           p3 : f2 channel - 90 degree high power pulse
;P90[F2]*2      all           p4 : f2 channel - 180 degree high power pulse
;P90[F3]        all           p21: f3 channel - 90 degree high power pulse
;P90[F3]*2      all           p22: f3 channel - 180 degree high power pulse
;P90[F4]        default       p23: f4 channel - 90 degree high power pulse
;
;PCPD[P1]       triple+triple2+triple_na p26: f1 channel - 90 degree pulse at pl19
;
;PL90[F1]        all           p11 : f1 channel - power level for pulse (default)
;PL90[F1]        all(!triple_c) p118: f1 channel - power level for 3-9-19-pulse
(watergate)
;PL90[F2]        all           p12 : f2 channel - power level for pulse (default)
;PL90[F3]        all           p13 : f3 channel - power level for pulse (default)
;PL90[F4]        all           p14 : f4 channel - power level for pulse (default)
;
;PLCPDP[F1]     all(!triple_c) p119: f1 channel - power level for CPD/BB decoupling
;PLCPDP[F2]     all           p112: f2 channel - power level for CPD/BB decoupling
;PLCPDP[F2]     default+triple+triple2+triple_na p130: f2 channel - power level for CPD/BB decoupling
;
;PLCPDP[F2]-18 lcnmr          p126: f2 channel - power level for cw decoupling
;PLCPDP[F3]     all           p116: f3 channel - power level for CPD/BB decoupling
;PLCPDP[F4]     all           p117: f4 channel - power level for CPD/BB decoupling
;PLCPD2[F2]     default+lcnmr+triple_c p113: f2 channel - power level for second CPD/BB
decoupling
;
;PLCW[F1]        all(!triple_c) p19 : f1 channel - power level for presaturation
;PLCW[F2]        default+lcnmr p121: f2 channel - power level for presaturation
;PLCW[F2]        triple+triple2 p114: f2 channel - power level for cw saturation
;PLCW[F3]        lcnmr          p122: f3 channel - power level for presaturation
;
;PLHD[F2]        all           p124: f2 channel - power level for hd/hc decoupling
;
;PLNOE[F2]       default       p114: f2 channel - power level for cw saturation
;
;PLROE[F1]       all           p111: f1 channel - power level for ROESY-spinlock
;PLROE[F1]       default       p127: f1 channel - power level for pulsed ROESY-spinlock
;
;PLSH1[F1]       default       sp1 : f1 channel - shaped pulse for selective excitation
;PLSH1[F3]       triple2      sp19: f3 channel - shaped pulse 90 degree (T1rho,
adiab. ramp up)
;PLSH2[F1]       default       sp2 : f1 channel - shaped pulse 180 degree
;PLSH2[F2]       default       sp7 : f2 channel - shaped pulse 180 degree (adiabatic)
;PLSH2[F3]       triple2      sp20: f3 channel - shaped pulse 90 degree (T1rho,
adiab. ramp down)
;PLSH3[F1]       lcnmr          sp1 : f1 channel - shaped pulse for wet
;PLSH3[F1]       lcnmr          sp2 : f1 channel - shaped pulse for wet
;PLSH3[F1]+0.87 lcnmr          sp7 : f1 channel - shaped pulse for wet
;PLSH3[F1]+0.87 default       sp19: f1 channel - shaped pulse for wet
;PLSH3[F1]-1.04 lcnmr          sp8 : f1 channel - shaped pulse for wet
;PLSH3[F1]-1.04 default       sp20: f1 channel - shaped pulse for wet
;PLSH3[F1]+2.27 lcnmr          sp9 : f1 channel - shaped pulse for wet
;PLSH3[F1]+2.27 default       sp21: f1 channel - shaped pulse for wet
;PLSH3[F1]-5.05 lcnmr          sp10: f1 channel - shaped pulse for wet
;PLSH3[F1]-5.05 default       sp22: f1 channel - shaped pulse for wet

```

```

;PLSH3[F2]      default          sp3 : f2 channel - shaped pulse 180 degree (adiabatic)
;PLSH3[F2]      triple+triple2+triple_na sp13: f2 channel - shaped pulse 180 degree (adiabatic)
;PLSH4[F1]      triple_c          sp23: f1 channel - shaped pulse 90 degree (on
resonance)
;PLSH4[F2]      triple+triple2      sp2 : f2 channel - shaped pulse 90 degree (on
resonance)
;PLSH4[F2]      triple+triple2      sp4 : f2 channel - shaped pulse 90 degree (off
resonance)
;PLSH5[F1]      triple_c          sp25: f1 channel - shaped pulse 90 degree (on
resonance)
;PLSH5[F2]      triple+triple2      sp8 : f2 channel - shaped pulse 90 degree (on res.,
time reversed)
;PLSH6[F1]      triple_c          sp22: f1 channel - shaped pulse 180 degree (off
resonance)
;PLSH6[F1]      triple_c          sp24: f1 channel - shaped pulse 180 degree (on
resonance)
;PLSH6[F1]      triple_c          sp26: f1 channel - shaped pulse 180 degree (off
resonance)
;PLSH6[F1]      triple_c          sp27: f1 channel - shaped pulse 180 degree (off
resonance)
;PLSH6[F1]      triple_c          sp29: f1 channel - shaped pulse 180 degree (off
resonance)
;PLSH6[F2]      triple+triple2      sp3 : f2 channel - shaped pulse 180 degree (on
resonance)
;PLSH6[F2]      triple+triple2      sp5 : f2 channel - shaped pulse 180 degree (off
resonance)
;PLSH6[F2]      triple+triple2      sp7 : f2 channel - shaped pulse 180 degree (off
resonance2)
;PLSH7[F1]      all(!triple_c)    sp6 : f1 channel - shaped pulse for presaturation
;PLSH7[F2]      triple*           sp10: f2 channel - shaped pulse 90 degree (higher
selectivity)
;PLSH8[F1]      triple+triple2+triple_na sp1 : f1 channel - shaped pulse for water flipback
;PLSH8[F1]      default          sp11: f1 channel - shaped pulse for water flipback
;PLSH8[F2]      triple+triple2      sp12: f2 channel - shaped pulse 90 degree (higher
sel., time rev.)
;PLSH9[F1]      triple+triple2+triple_na sp11: f1 channel - shaped pulse for water flipback2
;PLSH9[F2]      triple+triple2      sp9 : f2 channel - shaped pulse 180 degree (higher
selectivity)
;PLSH9[F2]      triple+triple2      sp16: f2 channel - shaped pulse 180 degree (higher
selectivity)
;PLSH9[F2]      triple+triple2      sp17: f2 channel - shaped pulse 180 degree (higher
selectivity)
;PLSH10[F1]     triple2           sp22: f1 channel - shaped pulse 90 degree (H2O on
resonance)
;PLSH10[F2]     triple            sp15: f2 channel - shaped pulse 180 degree for
decoupling (Ca or CO)
;PLSH10[F2]     triple+triple2      p128: f2 channel - power level for selective Ca or CO
decoupling
;PLSH11[F1]     triple2           sp21: f1 channel - shaped pulse 180 degree (H2O on
resonance)
;PLSH11[F2]     default+triple+triple2 sp31: f2 channel - shaped pulse 180 degree (adiabatic
decoupling)
;
;PLSH12[F1]     triple_c          sp13: f1 channel - shaped pulse 180 degree (adiabatic)
;PLSH12[F2]     default+triple+triple2 sp14: f2 channel - shaped pulse 180 degree (adiabatic
bilev decoupling)
;PLSH13[F1]     triple_c          sp7 : f2 channel - shaped pulse 180 degree (adiabatic)
;PLSH13[F2]     triple+triple2      p113: f2 channel - power level for Cbeta/CO decoupling
;PLSH13[F2]     triple2           sp15: f2 channel - shaped pulse 180 degree for
decoupling (Cbeta)
;PLSH14[F1]     triple_c          sp28: f1 channel - shaped pulse 180 degree (higher
selectivity)
;PLSH14[F2]     triple2           p129: f2 channel - power level for simultaneous Ca and
CO decoupling
;PLSH14[F2]     triple2           sp30: f2 channel - power level for simultaneous Ca and
CO decoupling
;PLSH14[F2]     triple_c          sp19: f2 channel - shaped pulse 90 degree (HN)
;PLSH15[F1]     triple_c          sp30: f1 channel - shaped pulse 180 degree (sim. Ca +
CO decoupling)
;PLSH15[F2]     default+triple      sp18: f2 channel - shaped pulse 180 degree (adiabatic
matched sweep)
;PLSH15[F2]     triple_c          sp20: f2 channel - shaped pulse 90 degree (HN tr)
;PLSH16[F1]     default          sp29: f1 channel - shaped pulse 180 degree (adiabatic:
z-spoil)
;PLSH16[F2]     triple_c          sp11: f2 channel - shaped pulse 90 degree (water
flipback)
;

```

```

;PLSH1U[F1]      triple_na          sp23: f1 channel - shaped pulse 180 degree (_NA: H)
;PLSH1U[F1]      triple_na          sp24: f1 channel - shaped pulse 180 degree (_NA: H)
;PLSH1U[F2]      triple_na          sp2 : f2 channel - shaped pulse 90 degree (_NA: C)
;PLSH1U[F3]      triple_na          sp9 : f3 channel - shaped pulse 180 degree (_NA: N)
;PLSH2U[F2]      triple_na          sp8 : f2 channel - shaped pulse 90 degree (_NA: C, tr)
;PLSH2U[F3]      triple_na          sp14: f3 channel - shaped pulse 180 degree (_NA: N,
adiabatic)
;PLSH3U[F2]      triple_na          sp3 : f2 channel - shaped pulse 180 degree (_NA: C)
;PLSH3U[F2]      triple_na          sp5 : f2 channel - shaped pulse 180 degree (_NA: C)
;PLSH3U[F2]      triple_na          sp7 : f2 channel - shaped pulse 180 degree (_NA: C)
;PLSH4U[F2]      triple_na          sp10: f2 channel - shaped pulse 90 degree (_NA: C,
higher sel.)
;PLSH5U[F2]      triple_na          sp12: f2 channel - shaped pulse 90 degree (_NA: C,
higher sel., tr)
;PLSH6U[F2]      triple_na          sp15: f2 channel - shaped pulse 180 degree (_NA: C,
decoupling)
;PLSH6U[F2]      triple_na          sp25: f2 channel - shaped pulse 180 degree (_NA: C,
higher sel.)
;PLSH6U[F2]      triple_na          p128: f2 channel - shaped pulse 180 degree (_NA: C,
decoupling)
;PLSH7U[F2]      triple_na          sp0 : f2 channel - shaped pulse 180 degree (_NA: C,
twofold mod)
;
;PLTOC[F1]       all                p110: f1 channel - power level for TOCSY-spinlock
;PLTOC[F2]       all                p115: f2 channel - power level for TOCSY-spinlock
;PLTOC[F3]       all(!triple2+triple_na) p123: f3 channel - power level for TOCSY-spinlock
;
;PLUSER1[F1]     triple2           p127: f1 channel - power level for CLEANEX spinlock
;PLUSER1[F2]     lcnmr             p114: f2 channel - power level for low power decoupling
;PLUSER1[F3]     triple*            p125: f3 channel - power level for Tlrho spinlock
;PLUSER2[F2]     default+triple+triple2 p131: f2 channel - power level for bilev dec. (cw part)
;                           +triple_na
;PLUSER2[F3]     triple2           p123: f3 channel - power level for Rexchange
;PLUSER3[F1]     triple_na         p125: f1 channel - power level for hetero TOCSY
;PLUSER3[F2]     triple_na         p126: f2 channel - power level for hetero TOCSY
;PLUSER3[F3]     triple_na         p123: f3 channel - power level for hetero TOCSY
;PLUSER4[F2]     triple_na         p127: f2 channel - power level for hetero TOCSY higher
sel.
;PLUSER4[F3]     triple_na         p122: f3 channel - power level for hetero TOCSY higher
sel.
;PLUSER5[F2]     triple_na         p120: f2 channel - power level for TOCSY higher sel.
;
;PROE[F1]*2     ROESY             p25: f1 channel - 90 degree pulse at p127 (pulsed
;
;PSH1[F1]        excitation       p11: f1 channel - 90 degree shaped pulse (selective
;
;PSH1[F3]        triple2           p29: f3 channel - shaped pulse for adiabatic ramping
;PSH2[F1]        default+lcnmr    p12: f1 channel - 180 degree shaped pulse (C, adiabatic)
;PSH2[F1]        default+lcnmr    p12: f1 channel - 180 degree shaped pulse (H, selective)
;PSH2[F2]        default+lcnmr    p24: f2 channel - 180 degree shaped pulse (adiabatic)
;PSH3[F1]        lcnmr             p11: f1 channel - 90 degree shaped pulse (wet)
;PSH3[F1]        default            p8 : f1 channel - 90 degree shaped pulse (wet)
;PSH3[F2]        default+lcnmr    p14: f2 channel - 180 degree shaped pulse (adiabatic)
;PSH3[F2]        triple+triple2+triple_na p8 : f2 channel - 180 degree shaped pulse (adiabatic)
;PSH4[F1]        triple_c          p11: f1 channel - 90 degree shaped pulse
;PSH4[F2]        triple+triple2    p13: f2 channel - 90 degree shaped pulse
;PSH6[F1]        triple_c          p12: f1 channel - 180 degree shaped pulse (selective)
;PSH6[F2]        triple+triple2    p14: f2 channel - 180 degree shaped pulse (selective)
;PSH7[F1]        all(!triple_c)    p18: f1 channel - shaped pulse (off resonance
presaturation)
;PSH7[F2]        triple+triple2    p23: f2 channel - 90 degree shaped pulse (higher
selectivity)
;PSH8[F1]        triple+triple2+triple_na p11: f1 channel - 90 degree shaped pulse (water
flipback/watergate)
;PSH8[F1]*2     triple+triple2    p12: f1 channel - 180 degree shaped pulse (excitation
sculpting)
;PSH8[F1]        default            p29: f1 channel - 90 degree shaped pulse (water
flipback)
;PSH9[F1]        triple+triple_na  p29: f1 channel - 90 degree shaped pulse (water
flipback2)
;PSH9[F2]        triple+triple2    p24: f2 channel - 180 degree shaped pulse (higher
selectivity)
;PSH10[F1]       resonance          p15: f1 channel - 90 degree shaped pulse (H2O on
resonance)
;PSH10[F2]       triple             p31: f2 channel - 180 degree shaped pulse (sel. Ca or CO
decoupling)

```

```

;PSH11[F1]      triple2          p7 : f1 channel - 180 degree shaped pulse (H2O on
resonance)
;PSH11[F2]      default+triple+triple2  p63 : f2 channel - 180 degree shaped pulse (adiabatic
decoupling)
;
+triple_na
;PSH12[F1]      triple_c          p8 : f1 channel - 180 degree shaped pulse (adiabatic)
;PSH13[F1]      triple_c          p24: f1 channel - 180 degree shaped pulse (adiabatic)
;PSH13[F2]      triple*           pcpd8: f2 channel - 180 degree shaped pulse (Cbeta
decoupling)
;PSH13[F2]      triple2          p31: f2 channel - 180 degree shaped pulse (Cbeta
decoupling)
;PSH14[F1]      triple_c          p25: f1 channel - 180 degree shaped pulse (higher
selectivity)
;PSH14[F2]      triple2          p30: f2 channel - 180 degree shaped pulse (sim. Ca + CO
decoupling)
;PSH15[F1]      default          p31: f1 channel - 180 degree shaped pulse for inversion
(adiabatic matched sweep)
;PSH15[F1]      triple_c          p30: f1 channel - 180 degree shaped pulse (sim. Ca + CO
decoupling)
;PSH15[F2]      triple          p15: f2 channel - 180 degree shaped pulse for inversion
(adiabatic matched sweep)
;PSH15[F2]      triple_c          p13: f2 channel - 90 degree shaped pulse (H, selective)
;PSH16[F1]      default          p32: f1 channel - 180 degree shaped pulse for inversion
(adiabatic: z-spoil)
;PSH16[F2]      triple_c          p29: f2 channel - 90 degree shaped pulse for inversion
(water flipback)
;
;PSH1U[F1]      triple_na        p12: f1 channel - 180 degree shaped pulse (_NA: H)
;PSH1U[F2]      triple_na        p13: f2 channel - 90 degree shaped pulse (_NA: C)
;PSH1U[F3]      triple_na        p30: f3 channel - 180 degree shaped pulse (_NA: N)
;PSH2U[F3]      triple_na        p32: f3 channel - 180 degree shaped pulse (_NA: N,
adiabatic)
;PSH3U[F2]      triple_na        p14: f2 channel - 180 degree shaped pulse (_NA: C)
;PSH4U[F2]      triple_na        p15: f2 channel - 90 degree shaped pulse (_NA: C,
higher sel.)
;PSH6U[F2]      triple_na        p10: f2 channel - 180 degree shaped pulse (_NA: C,
higher sel.)
;PSH6U[F2]      triple_na        p31: f2 channel - 180 degree shaped pulse (_NA: C,
decoupling)
;PSH7U[F2]      triple_na        p23: f2 channel - 180 degree shaped pulse (_NA: C,
twofold mod)
;
;PTOC[F1]       all              p6 : f1 channel - 90 degree low power pulse
;PTOC[F1]*0.66  all(!triple_na)  p5 : f1 channel - 60 degree low power pulse
;PTOC[F1]*2     all(!triple2+triple_na)  p7 : f1 channel - 180 degree low power pulse
;PTOC[F2]       all              p9 : f2 channel - 90 degree low power pulse
;PTOC[F2]*2     all(!triple2+triple_na)  p10: f2 channel - 180 degree low power pulse
;PTOC[F3]       triple           p25: f3 channel - 90 degree pulse at p123
;PTOC[F3]*2     triple           p30: f3 channel - 180 degree pulse at p123
;
;PUSER1[F1]     triple2         p10: f1 channel - 180 degree low power pulse (CLEANEX
spinlock)
;PUSER1[F2]     lcnmr           p31: f2 channel - 90 degree low power pulse
(decoupling)
;PUSER2[F3]*2   triple2         p25: f3 channel - 180 degree low power pulse (Rexchange)
;PUSER3[F3]     triple_na        p25: f3 channel - 90 degree low power pulse (hetero
TOCSY)
;PUSER4[F3]     triple_na        p24: f3 channel - 90 degree low power pulse (hetero
TOCSY higher sel.)
;PUSER5[F2]     triple_na        p7 : f2 channel - 90 degree low power pulse (TOCSY
higher sel.)
;
;P_grad1        all              p16: homospoil/gradient pulse
;P_grad2        all              p19: homospoil/gradient pulse 2
;P_hsqc          all              p28: f1 channel - trim pulse at p11
;P_mlev          all              p17: f1 channel - trim pulse at p110
;P_mlev          all(!lcnmr)      p20: f2 channel - trim pulse at p115
;P_mlev          triple_na       p33: f3 channel - trim pulse at p123
;
;TROE[F1]       default+lcnmr  p15: f1 channel - pulse for ROESY spinlock
;
;TTOC[F1]       all              d9 : TOCSY mixing time
;TTOC[F2]       triple*         d15: TOCSY mixing time (CC)

```

;\$Id: \$